




FEMALE END VIEW (J1,J2)



MALE END VIEW (P1)




WIRING DIAGRAM




SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	150 mA (PINS 2,4), 1.5 A (PIN 5)
RATED VOLTAGE [V]	30 V
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IEC IP60
RIGHT-ANGLE CORDSET DIRECTION SYMBOL	

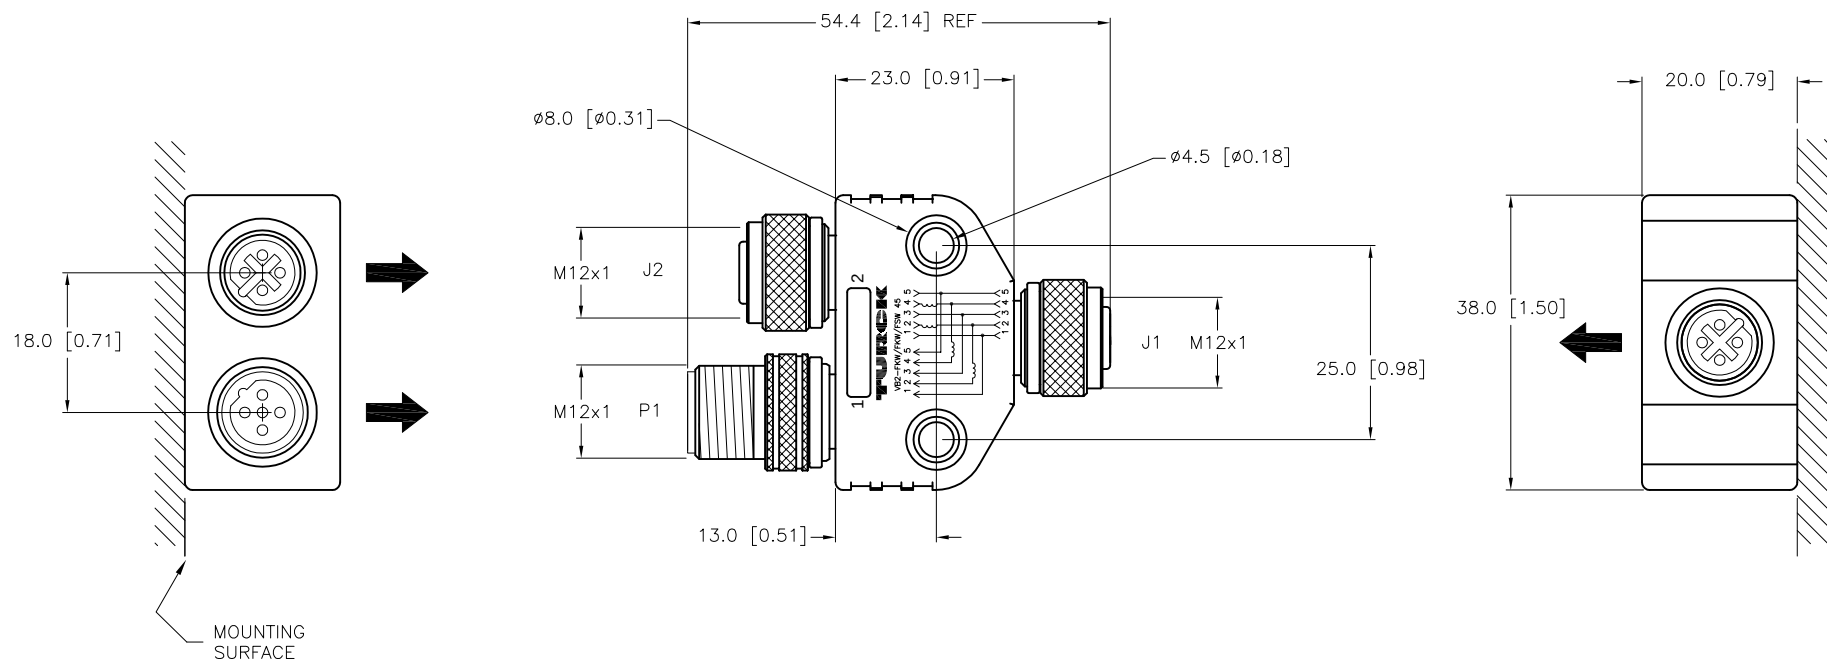

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.						DRFT RDS		DATE 12/01/08		DESCRIPTION	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DSGN		SCALE 1=1.0		VB2-FKW/FKW/FSW 45	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		MILLIMETER [INCH]		IDENTIFICATION NO.	
B UPDATE PROTECTION CLASS, SEE ECO				RWC 04/06/10 30619		DO NOT SCALE THIS DRAWING		FILE: U2-15087		REV B	
REV DESCRIPTION				BY DATE ECO NO.						SHEET 1 OF 1	