




FEMALE END VIEW



CONNECTOR
TYPE/STYLE/CLASS - MS 3106 F
SHELL SIZE - 14S
INSERT ARRANGEMENT - 6

SPECIFICATIONS

SHELL MATERIAL/PLATING/COLOR	ALUMINUM ALLOY/CADMIUM/OLIVE
CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
INSULATOR	NEOPRENE
CABLE GRIP MAX.	13.5mm
MAX. WIRE SIZE	16 AWG
CONTACT TYPE	SOLDER CUP
TEMPERATURE RATING	-55°C to +125°C (-67°F to +257°F)

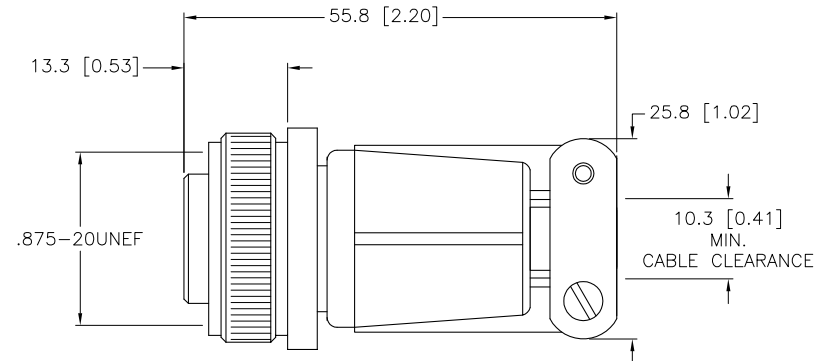

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.									
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT RDS		DATE 12/04/08		DESCRIPTION E-MK 6-0	
SEE SPECIFICATIONS				DSGN		SCALE 1=1.0			
FINISH				UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS						U2-15089		B	
						FILE: U2-15089		SHEET 1 OF 1	

B	UPDATE CONNECTOR SIZE AND THREAD	RDS	05/18/10	31167
REV	DESCRIPTION	BY	DATE	ECO NO.