



MALE END VIEW






BOARD LAYOUT (2:1)

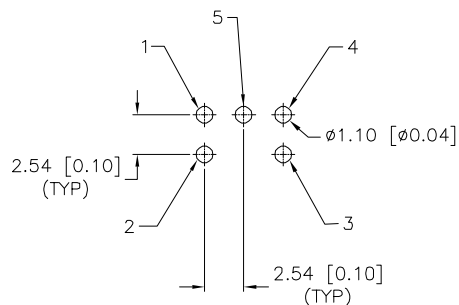

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING/LOCKNUT MATERIAL	BRASS/NICKEL
O-RING MATERIAL	NITRILE
RATED CURRENT [A]	2.5 A
RATED VOLTAGE [V]	250 V
TERMINAL PIN MATERIAL	PHOSPHOR BRONZE
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
MAX. PANEL THICKNESS	3.0 [0.12]

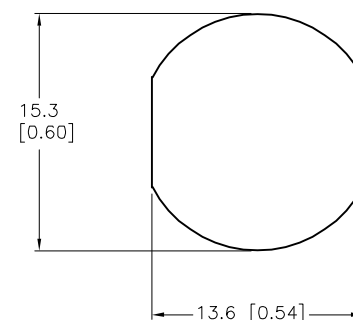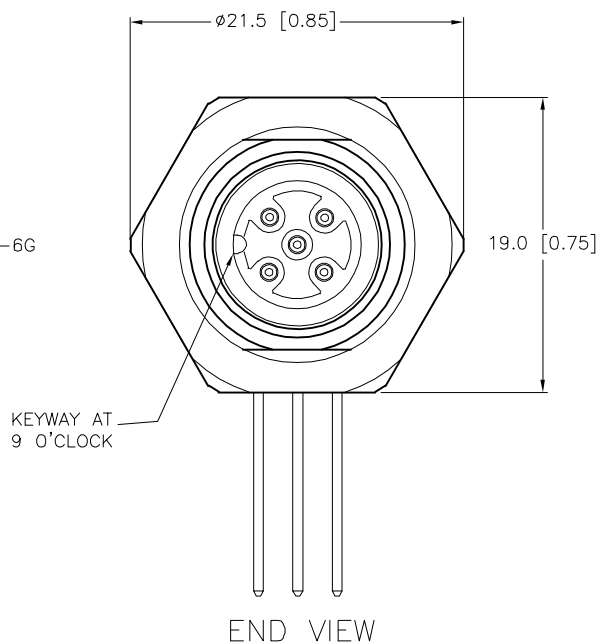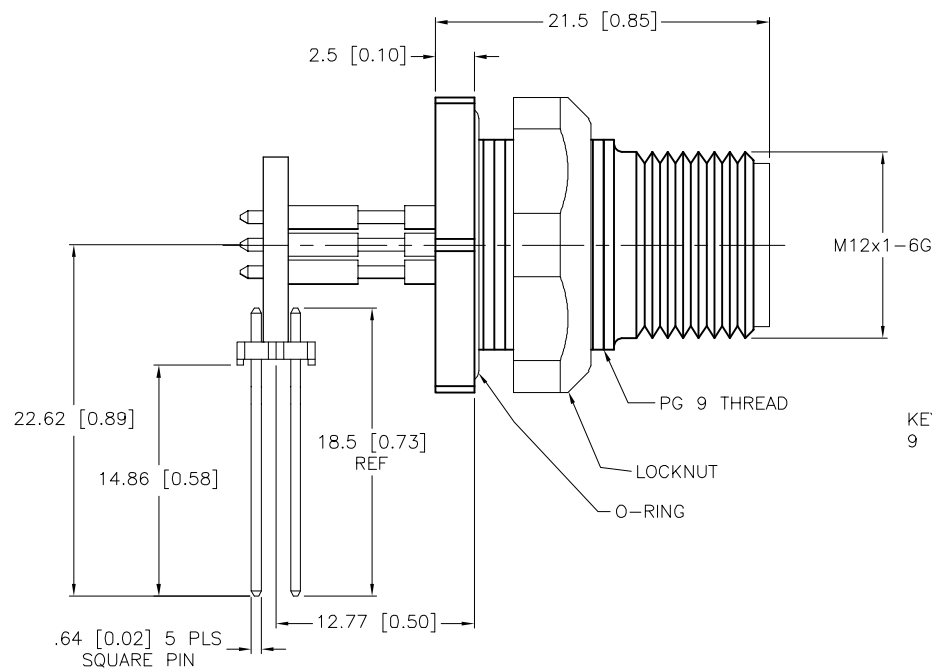


TYPICAL PANEL CUTOUT

END VIEW

NOTES:

1. "/CS12169" DESIGNATES PCB MOUNT RIGHT ANGLE RECEPTACLE WITH EXTENDED MOUNTING PINS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	RWC	DATE	12/04/08	DESCRIPTION WFSD 4.5-PCBH/CS12169		
		APVD		SCALE	2=1.0			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U2-15096		REV A
		DO NOT SCALE THIS DRAWING						

A	DRAWING RELEASE	RWC	12/09/08	
REV	DESCRIPTION	BY	DATE	ECO. NO.