




## MALE END VIEW

## FEMALE END VIEW



## SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
MOLDED MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/PLATING	ALUMINUM/CLEAR-ANODIZED
RATED CURRENT [A]	40 A
RATED VOLTAGE [V]	600 VAC
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

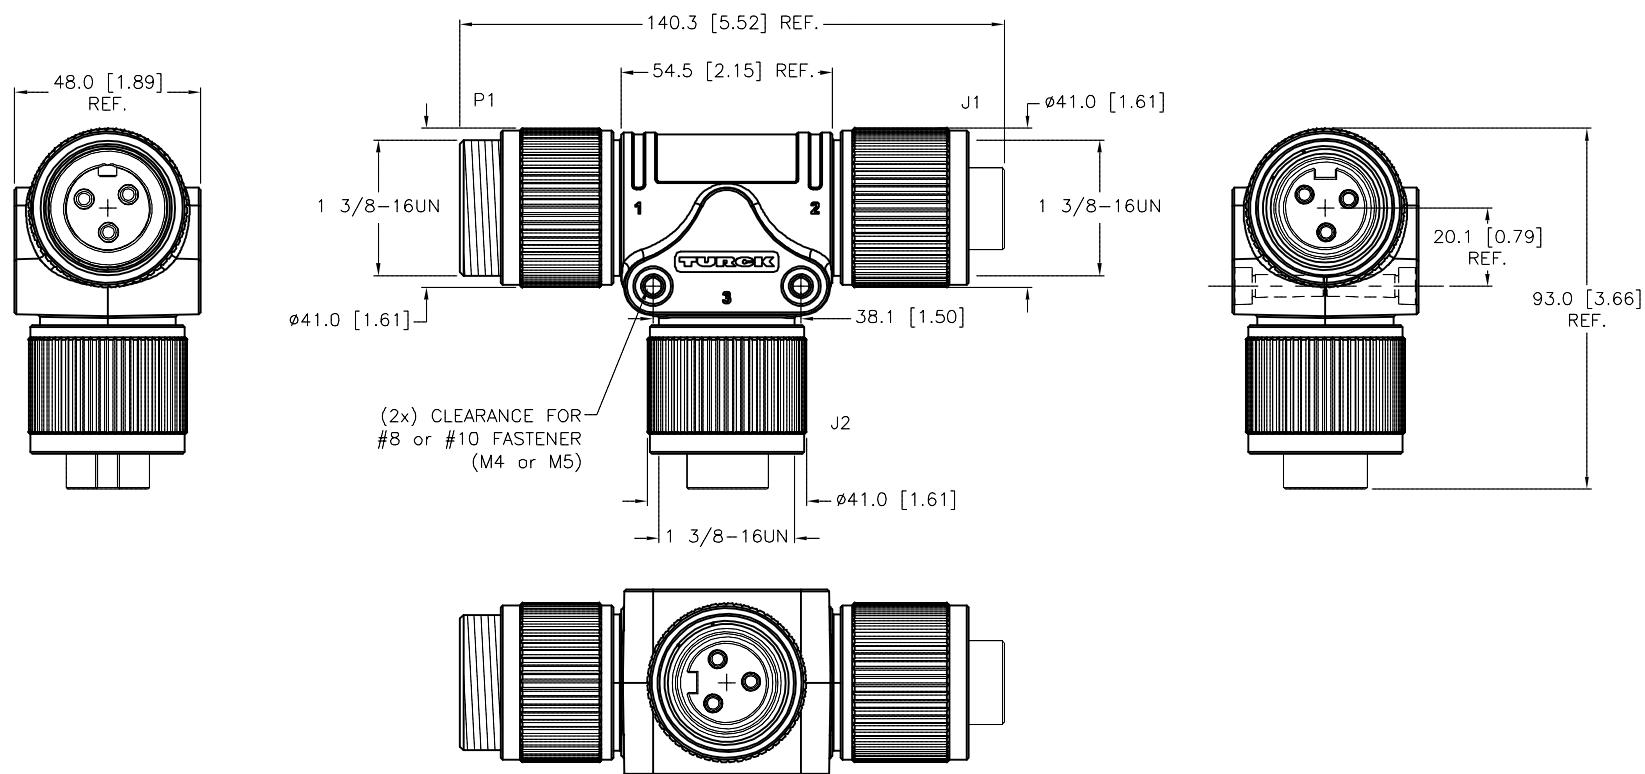

SOURCE DRAWING - FOR REFERENCE ONLY

**CAUTION:**RISK OF ELECTRICAL SHOCK  
DO NOT DISCONNECT UNDER LOAD

## RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

## 3RD ANGLE PROJECTION



THIS DRAWING IS  
CONFIDENTIAL AND THE  
PROPERTY OF TURCK  
INC. USE OF THIS  
DOCUMENT WITHOUT  
WRITTEN PERMISSION IS  
PROHIBITED.

3000 CAMPUS DRIVE  
MINNEAPOLIS, MN 55441  
1-800-544-7769  
(763) 553-7300  
(763) 553-0708 fax  
[www.turck.us](http://www.turck.us)

## MATERIAL

## FINISH

SEE SPECIFICATIONS

SEE SPECIFICATIONS

DRFT

APVD

RDS

SCALE

DATE 12/18/08

1=2.0

## UNIT OF MEASUREMENT

MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

## DESCRIPTION

GSDA/2GKDA 30

## IDENTIFICATION NO.

U2-15108

## REV

D

D UPDATED CURRENT RATING

ER

04/25/19

69361

REV DESCRIPTION

BY

DATE

ECO NO.

SHEET 1 OF 1