
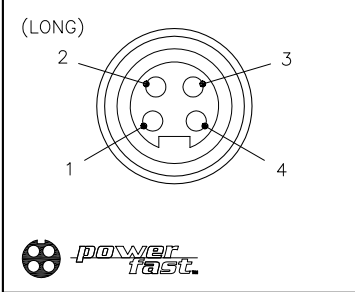
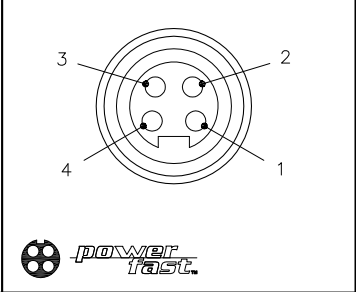
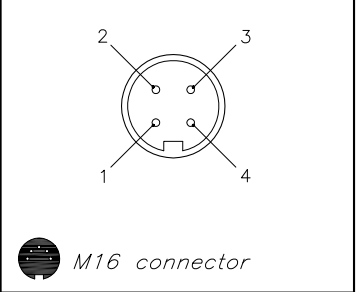
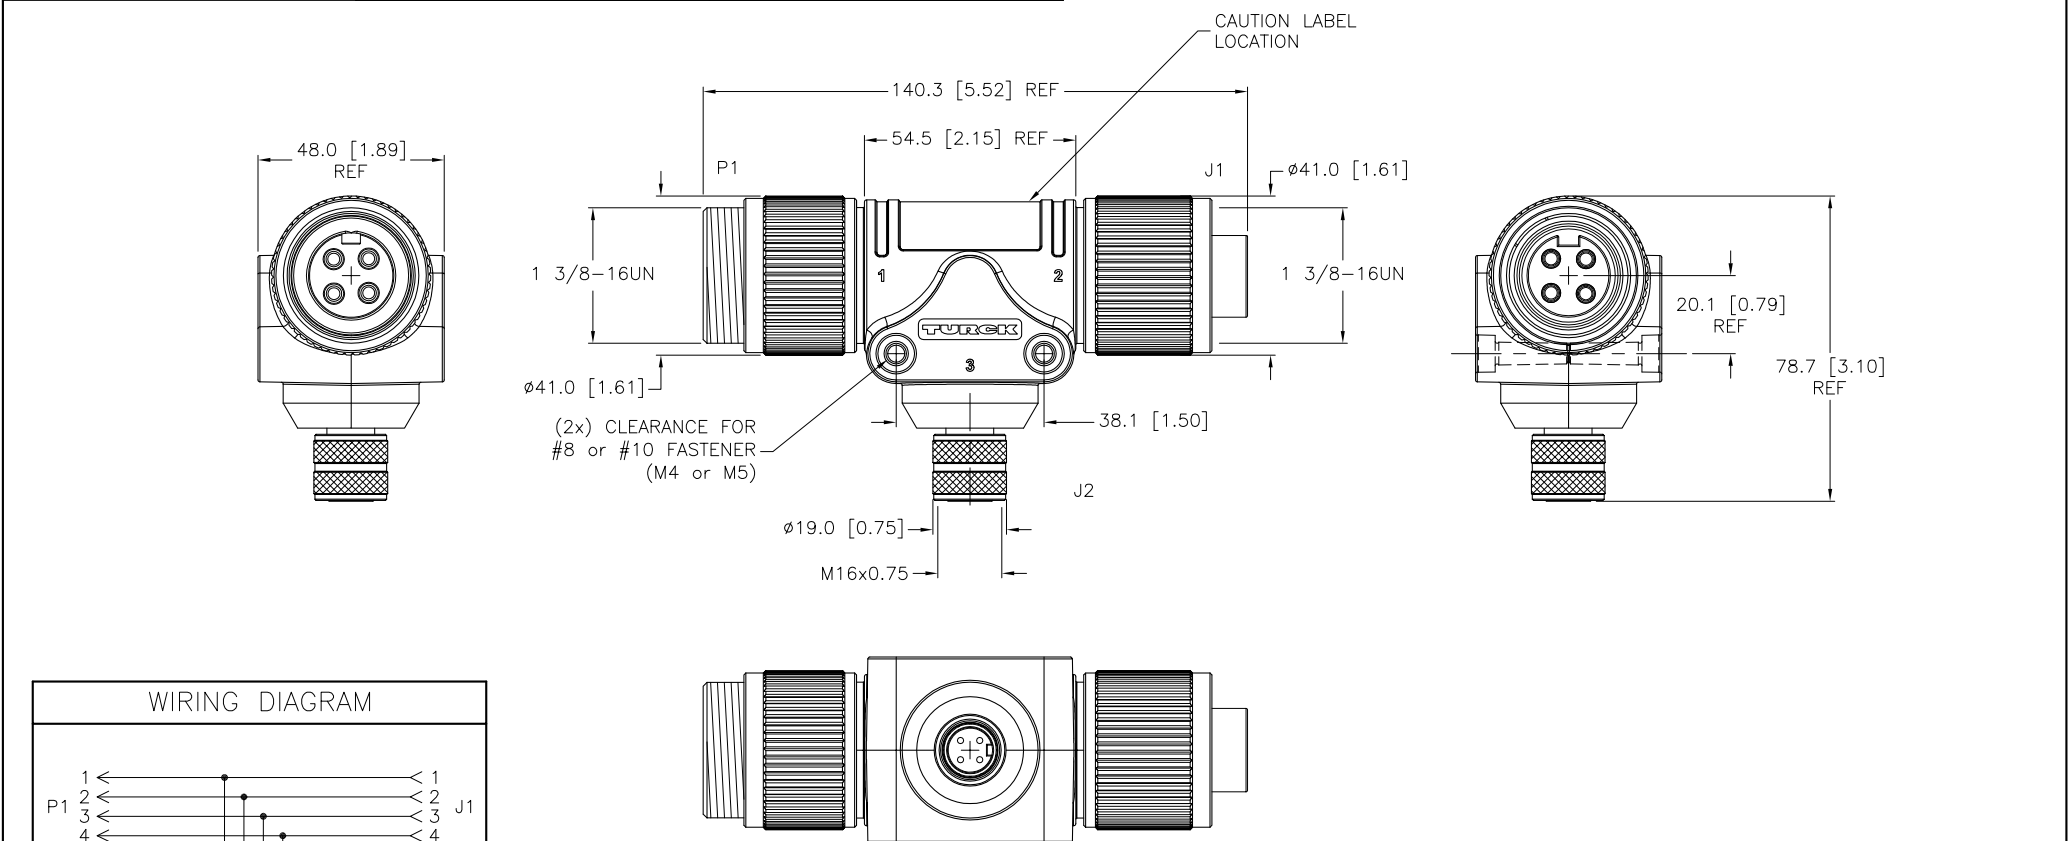


MALE END VIEW	FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK (P1,J1), TPU/BLACK (J2)
			MOLDED MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH (P1,J1)	ALUMINUM/CLEAR-ANODIZED
			COUPLING NUT MATERIAL/PLATING (J2)	BRASS/NICKEL
			RATED CURRENT [A]	25 A COMBINED, 15 A DROP
			RATED VOLTAGE [V]	600 V
			TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS IEC IP67

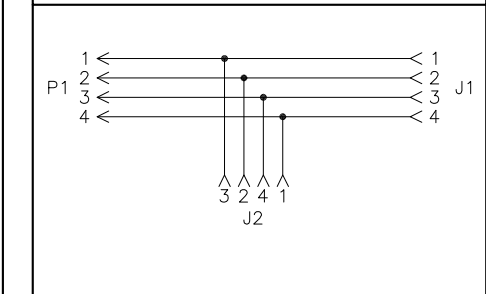

WIRING DIAGRAM		SOURCE DRAWING - FOR REFERENCE ONLY	
		CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD	
RELATED DOCUMENTS		3RD ANGLE PROJECTION	
1. THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		DRFT RWC	
2. DATE 10/28/09		DESCRIPTION	
3. DSGN		SCALE 1=2.0	
4. SEE SPECIFICATIONS		UNIT OF MEASUREMENT	
FINISH		MILLIMETER [INCH]	
SEE SPECIFICATIONS		IDENTIFICATION NO.	
		GSDA/GKDA/BKM 44	
		REV	
		A	
DO NOT SCALE THIS DRAWING		FILE: U2-15541	
SHEET 1 OF 1			