



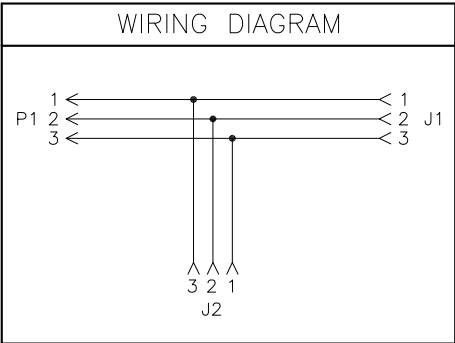
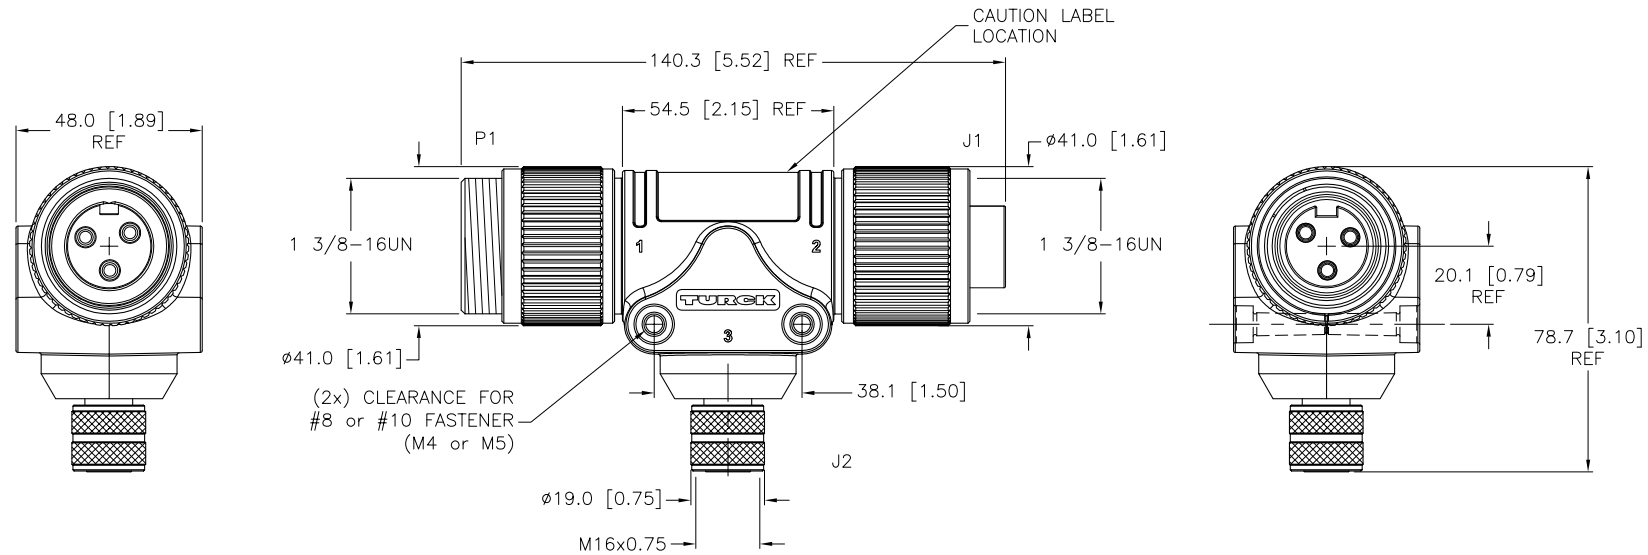


MALE END VIEW		FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK (P1,J1), TPU/BLACK (J2)
			 M16 connector	MOLDED MATERIAL/COLOR	PVC/BLACK
				CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
				COUPLING NUT MATERIAL/FINISH (P1,J1)	ALUMINUM/CLEAR-ANODIZED
				COUPLING NUT MATERIAL/PLATING (J2)	BRASS/NICKEL
				RATED CURRENT [A]	30 A COMBINED, 15 A DROP
				RATED VOLTAGE [V]	600 V
				TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
				PROTECTION CLASS	MEETS IEC IP67



 **CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

3 2 1 J2					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD					MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RWC DATE 10/28/09		DESCRIPTION GSDA/GKDA/BKM 34	
FINISH SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		DSGN SCALE 1=2.0		IDENTIFICATION NO. U2-15542		REV A	
A DRAWING RELEASE TR 05/25/11					UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		FILE: U2-15542		SHEET 1 OF 1			
REV DESCRIPTION BY DATE ECO NO.												