


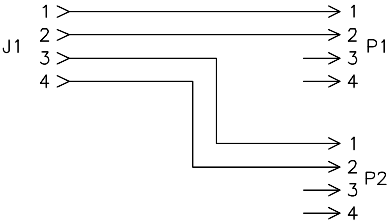


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/YELLOW
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

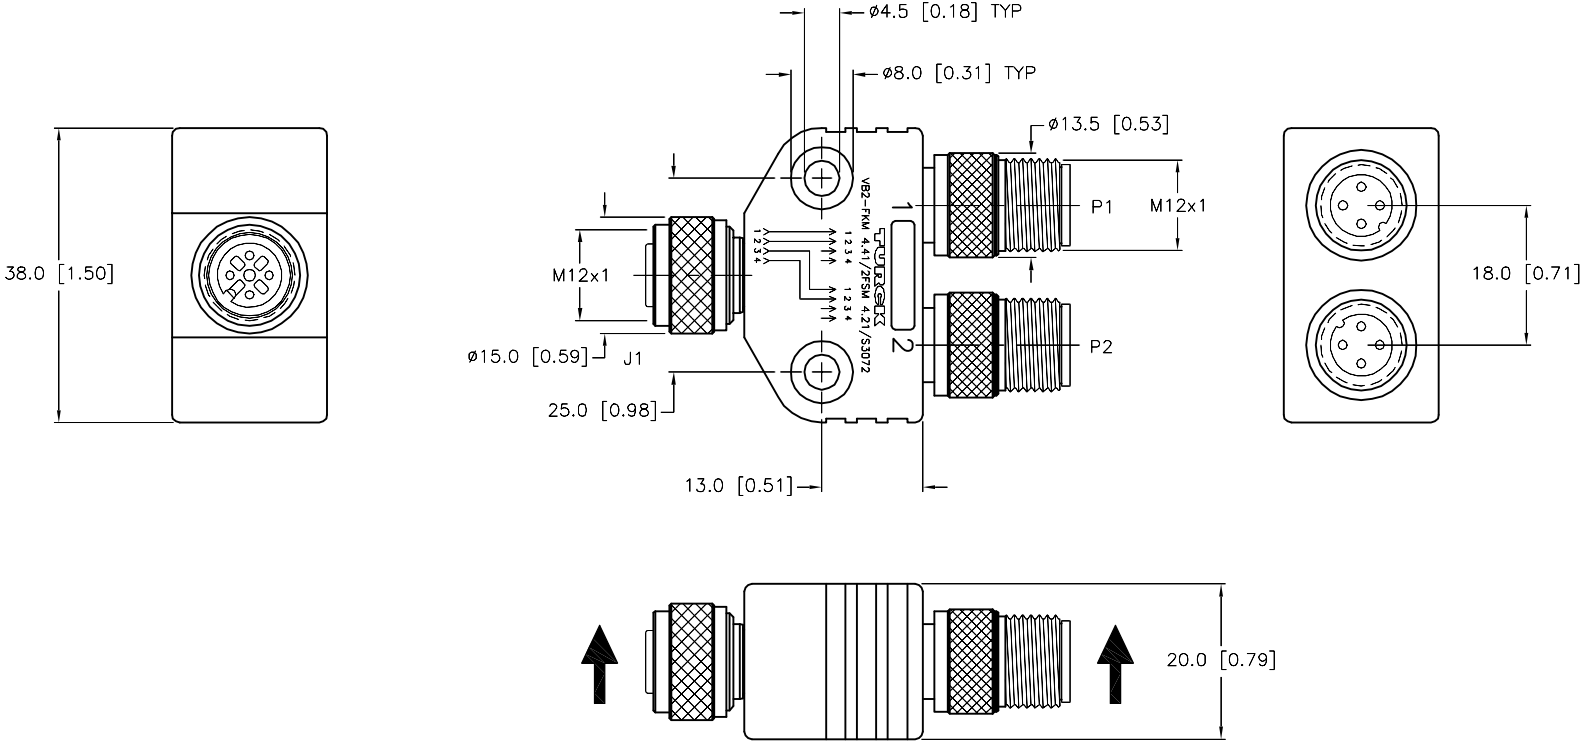


SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/S3072" DESIGNATES NON STANDARD KEYWAY ORIENTATION ON TRUNK AND BRANCHES.
2. ARROW DESIGNATES DIRECTION CABLE EXITS FROM A RIGHT ANGLED CORDSET.

C	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	RWC	DATE 04/10/09	DESCRIPTION VB2-FKM 4.41/2FSM 4.21/S3072
FINISH SEE SPECIFICATIONS	APVD			SCALE 1=1.0		
	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO. U2-15589		REV C
	DO NOT SCALE THIS DRAWING			FILE: U2-15589		SHEET 1 OF 1