
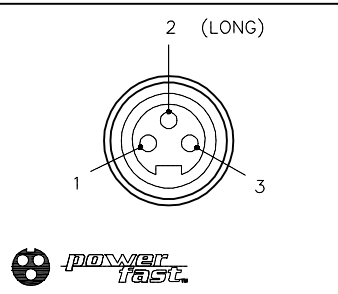
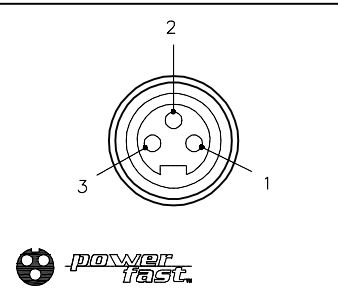
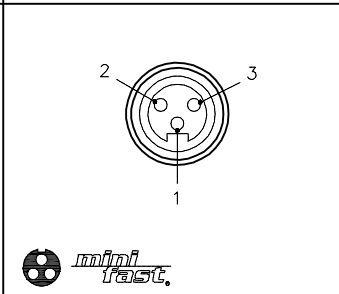
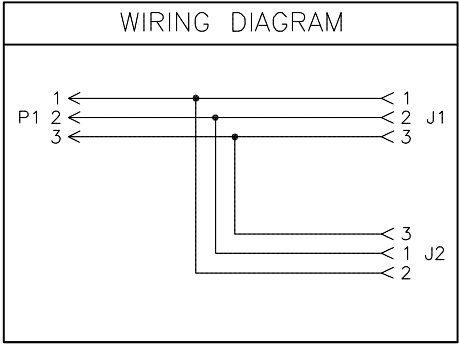


MALE END VIEW		FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	PVC
				MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
				CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	40 A COMBINED, 21 A DROP
				RATED VOLTAGE [V]	600 V
				TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
				APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238

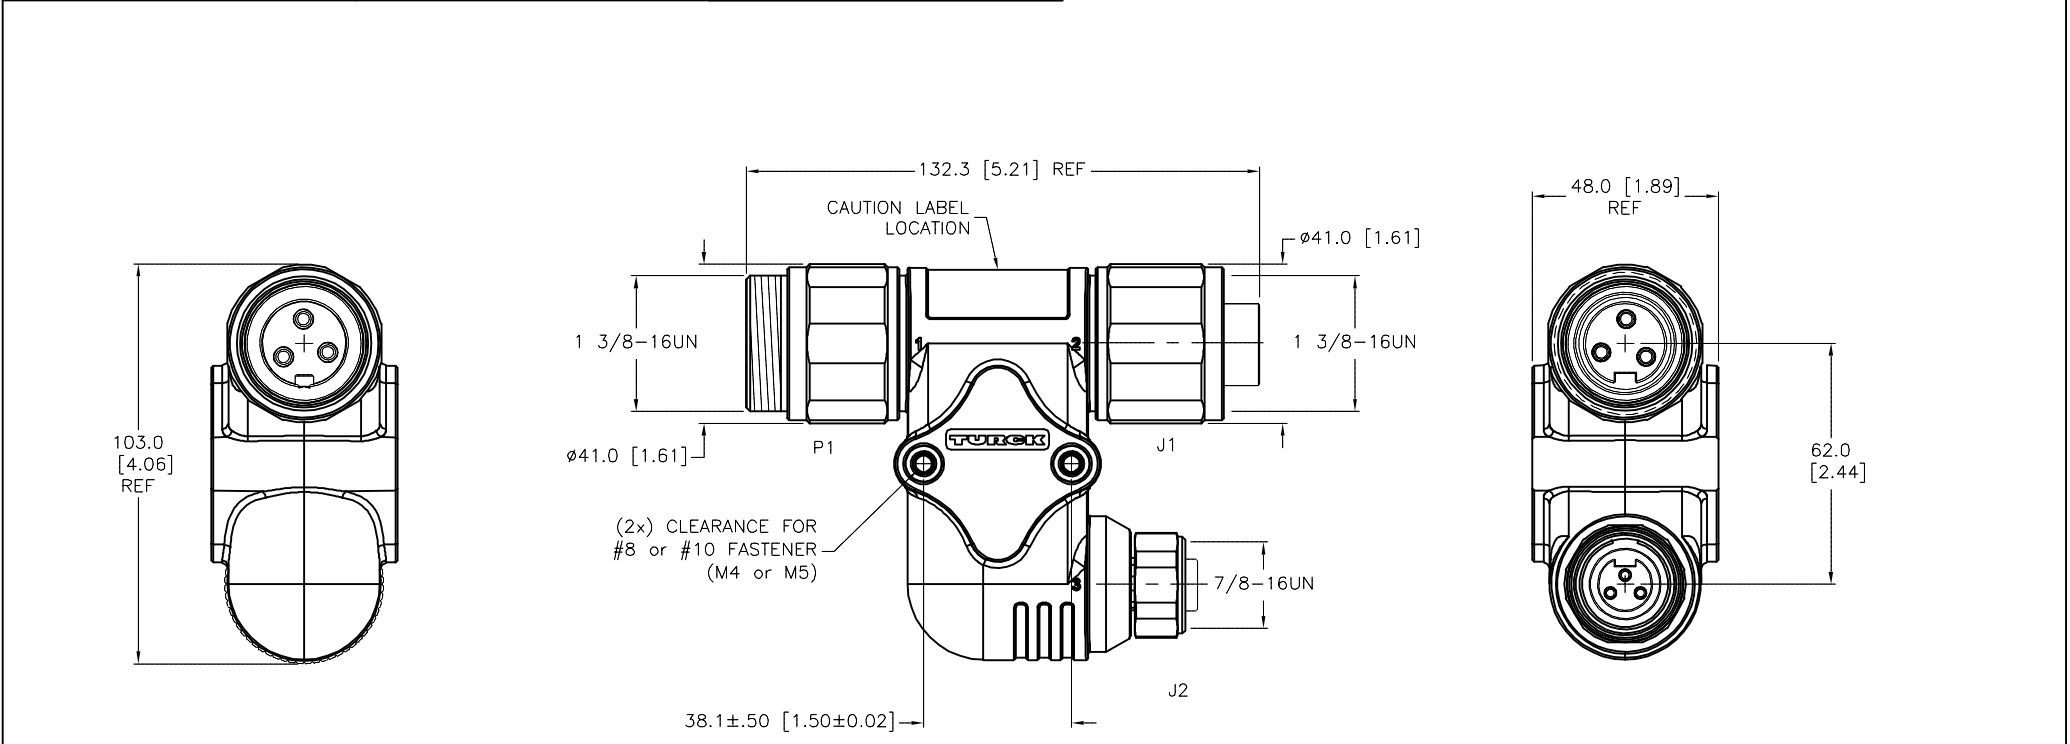

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT *CK		DATE 10/01/10	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=2.0	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					DO NOT SCALE THIS DRAWING		MILLIMETER [INCH]		SH-GSDV/GKDV/RKV 34	
SEE SPECIFICATIONS									IDENTIFICATION NO.	
									U2-15647	
									REV	
									D	
D UPDATED CURRENT RATING									FILE: U2-15647	
ER 04/26/19 69364									SHEET 1 OF 1	
REV DESCRIPTION										
BY DATE ECO NO.										