

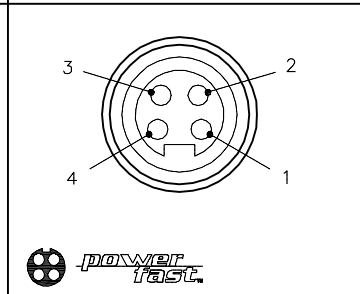
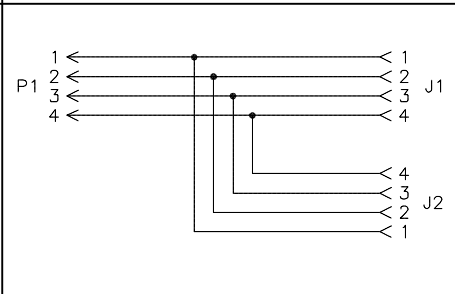
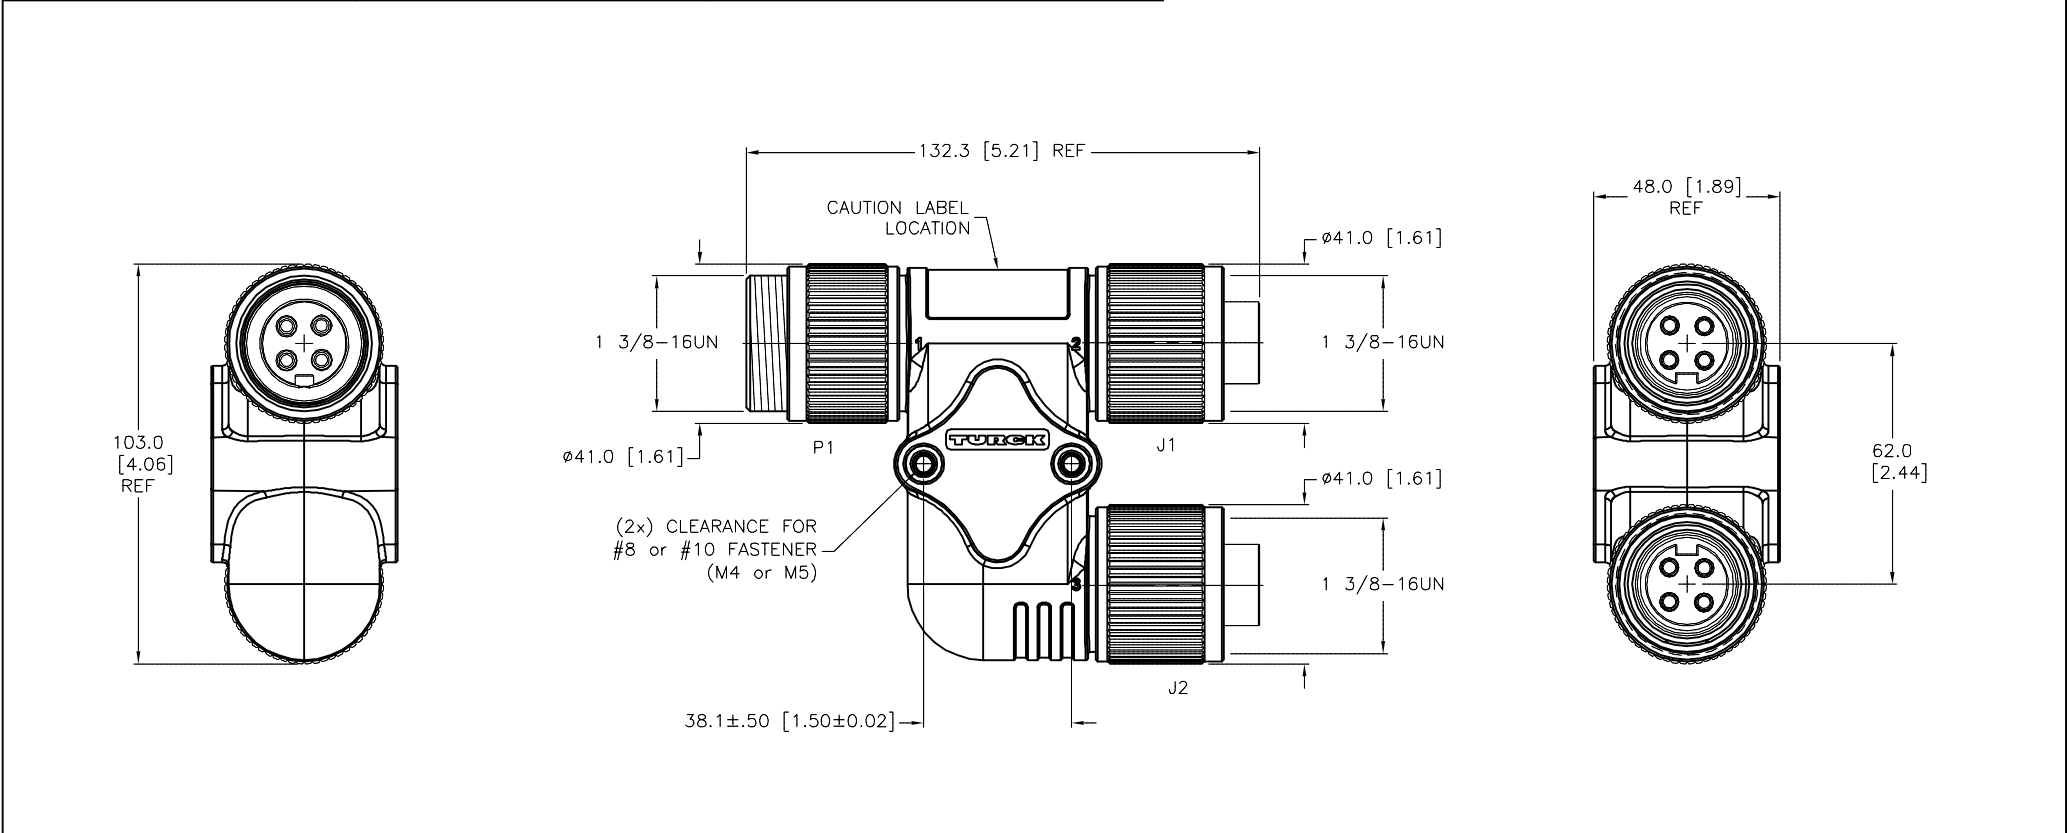


MALE END VIEW (P1)		FEMALE END VIEW (J1,J2)	WIRING DIAGRAM	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
				MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
				CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	35 A
				RATED VOLTAGE [V]	600 VAC
				TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K



SOURCE DRAWING - FOR REFERENCE ONLY

 CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
					1.				DRFT RWC APVD DATE 07/16/09 SCALE 1=2.0		DESCRIPTION SH-GSDM/2GKDM 40	
					2.							
					3.							
4.		MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-15649		REV C		
SEE SPECIFICATIONS												
FINISH		SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: U2-15649		SHEET 1 OF 1		
SEE SPECIFICATIONS												
C	UPDATE RATED CURRENT			RDS	04/12/19	69350						
REV	DESCRIPTION			BY	DATE	ECO NO.						