

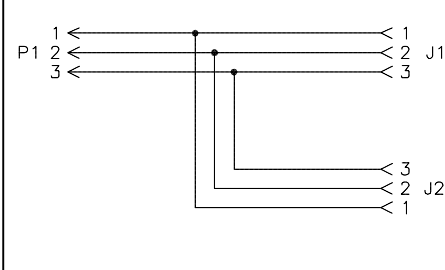
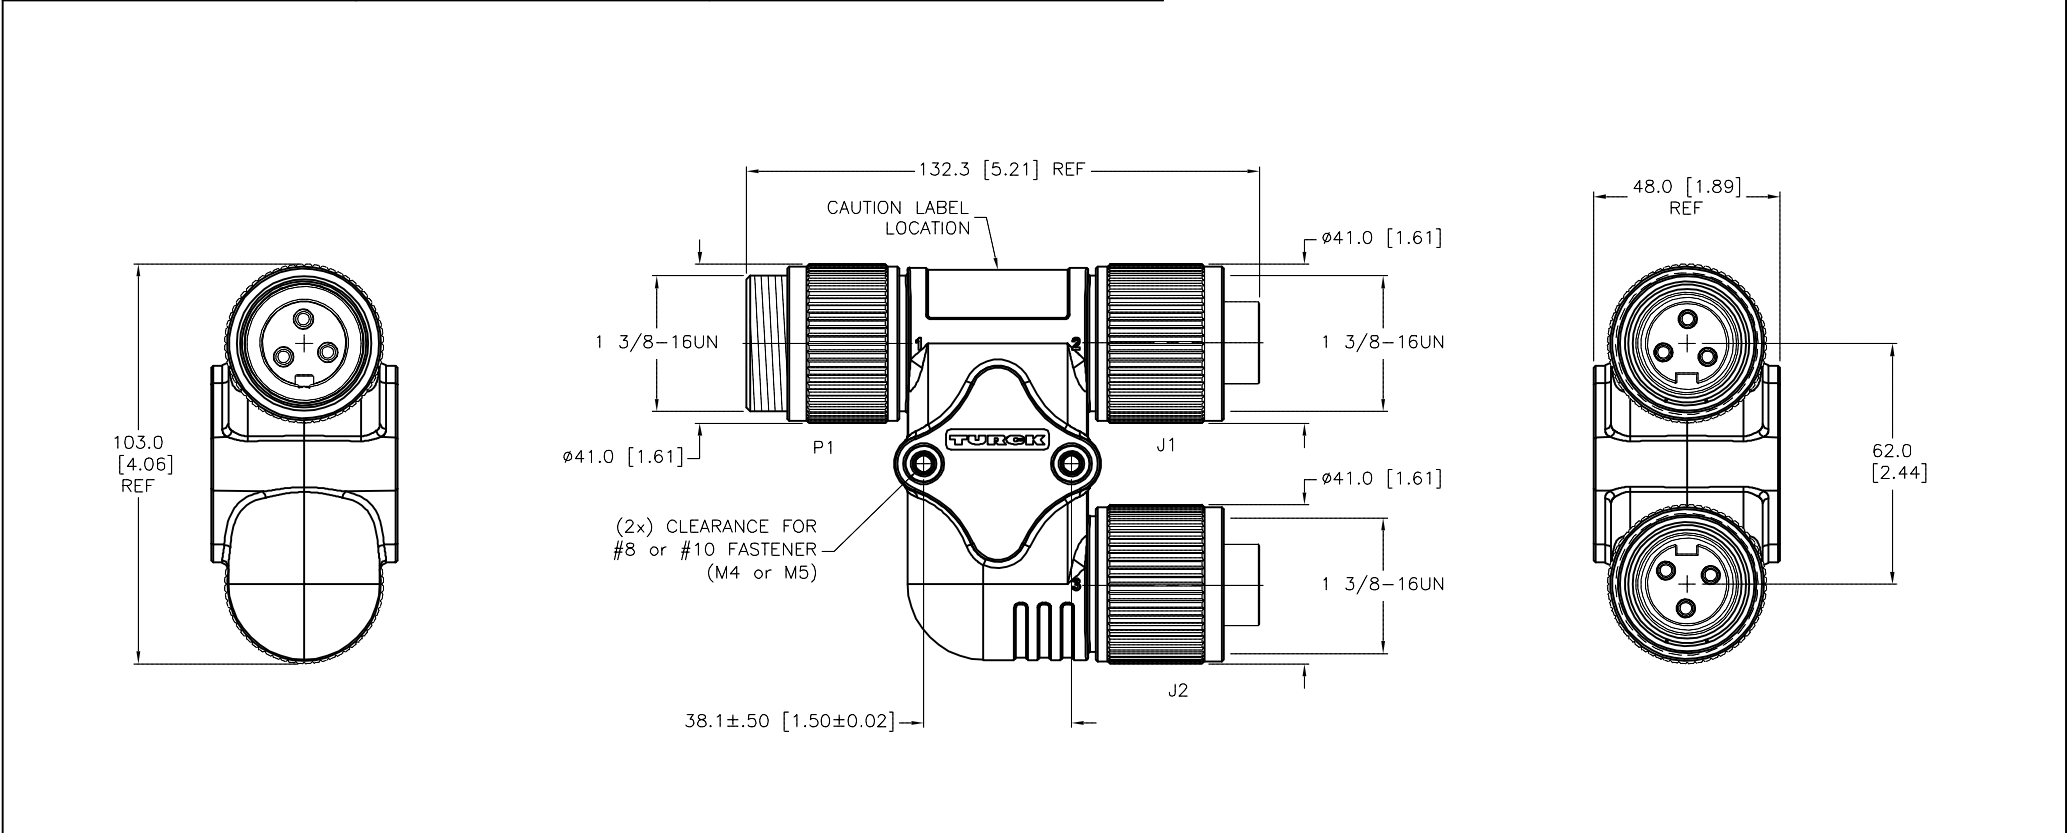




MALE END VIEW (P1)	FEMALE END VIEW (J1,J2)	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	40 A
			RATED VOLTAGE [V]	600 VAC
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K



SOURCE DRAWING - FOR REFERENCE ONLY

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

<div><div></div><div>CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD</div></div>					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					1. 2. 3. 4.				TURCK					
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	*JW	DATE	04/16/10	DESCRIPTION SH-GSDM/2GKDM 30	
					SEE SPECIFICATIONS				APVD		SCALE	1=2.0		
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT			IDENTIFICATION NO.		REV					
SEE SPECIFICATIONS				MILLIMETER [INCH]			U2-15650		C					
					DO NOT SCALE THIS DRAWING			FILE: U2-15650		SHEET 1 OF 1				
C	UPDATED CURRENT RATING			ER	04/25/19	69361								
REV	DESCRIPTION			BY	DATE	ECO NO.								