






MALE END VIEW	FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK (P1,J1), TPU/BLACK (J2)
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	25 A COMBINED, 15 A DROP
			RATED VOLTAGE [V]	600 V
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS IEC IP67

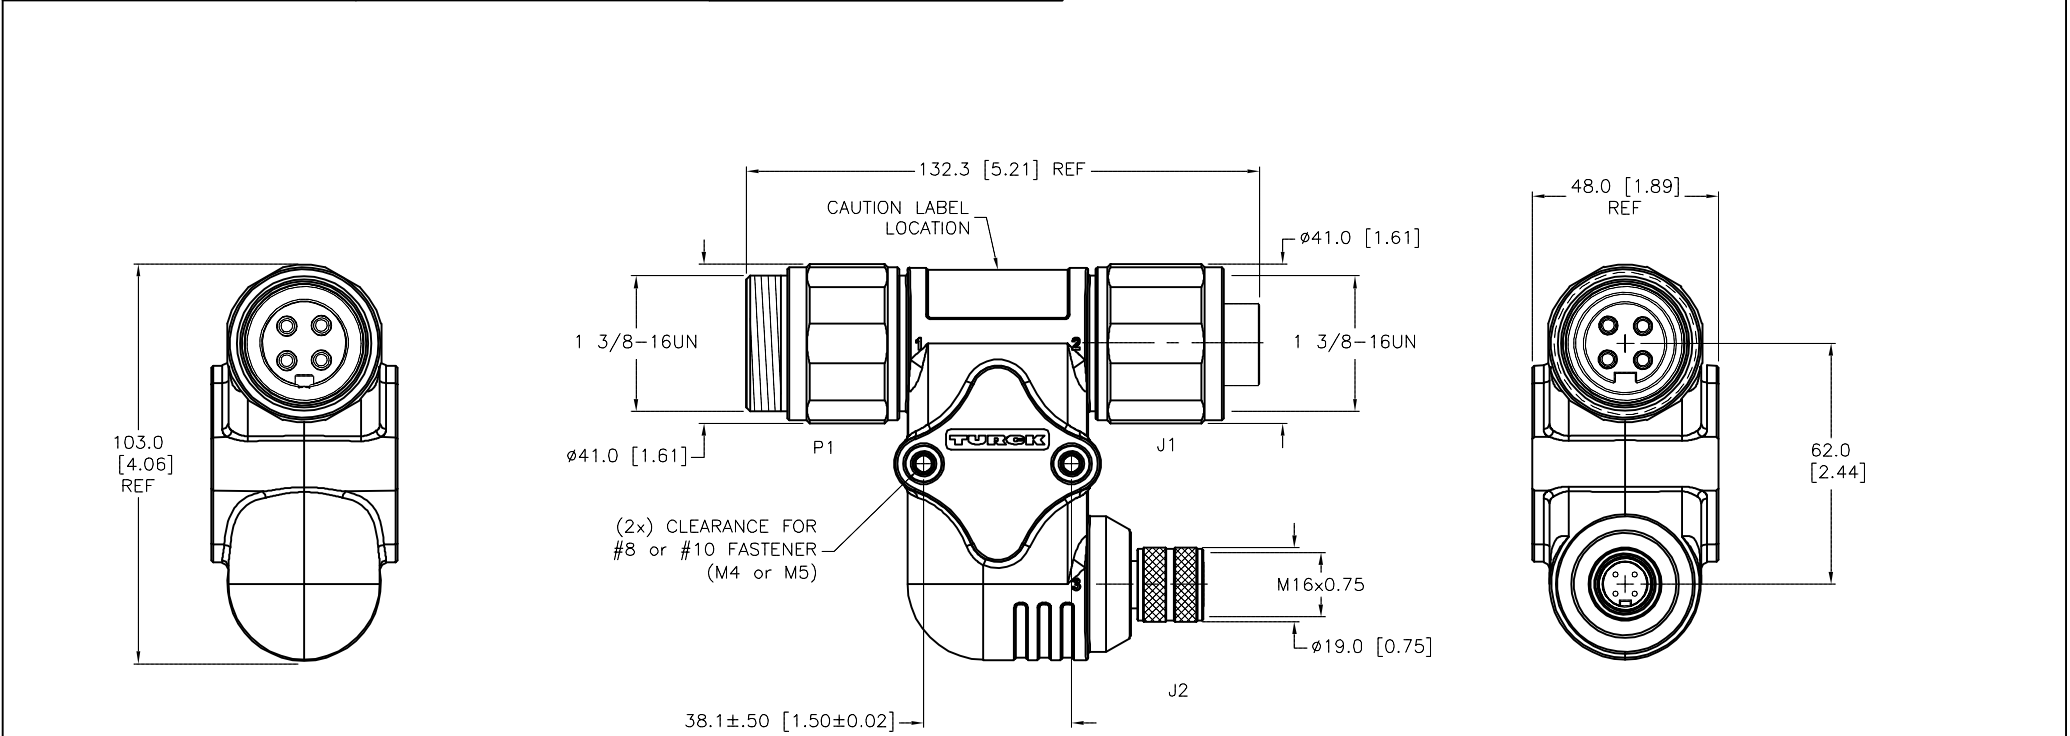

WIRING DIAGRAM

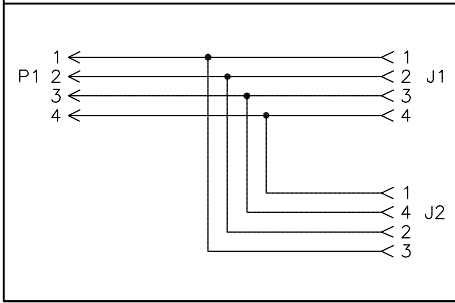

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
					1. 2. 3. 4.											
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT *CK		DATE 10/01/10		DESCRIPTION SH-GSDV/GKDV/BKMW 44			
					SEE SPECIFICATIONS				APVD		SCALE 1=2.0					
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U2-15653			
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING				FILE: U2-15653				SHEET 1 OF 1						
A	DRAWING RELEASE			TR	06/08/11											
REV	DESCRIPTION			BY	DATE	ECO NO.										