


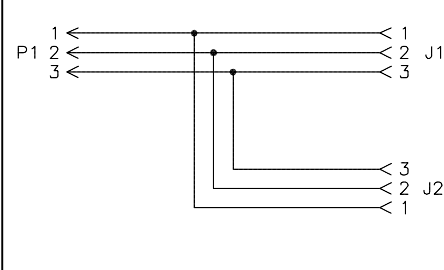
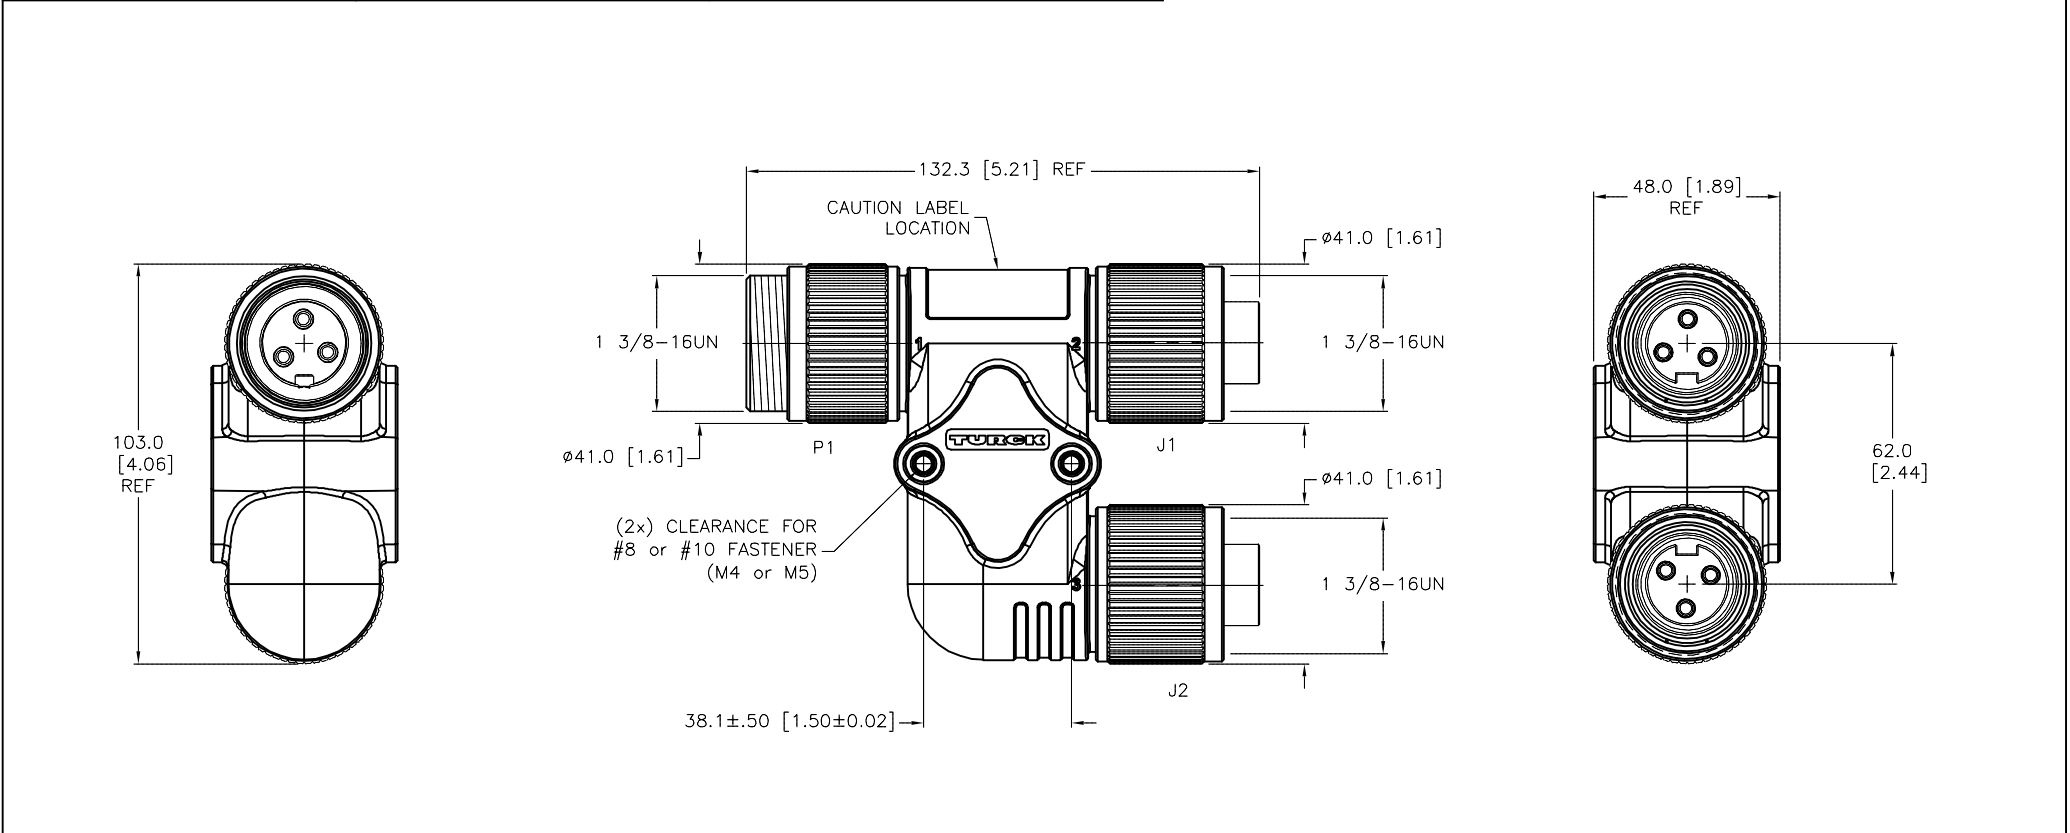


MALE END VIEW (P1)	FEMALE END VIEW (J1,J2)	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	ALUMINUM/CLEAR-ANODIZED
			RATED CURRENT [A]	40 A
			RATED VOLTAGE [V]	600 VAC
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K



SOURCE DRAWING - FOR REFERENCE ONLY

 CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD					RELATED DOCUMENTS		3RD ANGLE PROJECTION		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us										
					1. 2. 3. 4.						THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.								
C		UPDATED CURRENT RATING			ER	04/25/19		69361		MATERIAL		DRFT		*JW		DATE 04/16/10		DESCRIPTION SH-GSDA/2GKDA 30	
REV		DESCRIPTION			BY	DATE		ECO NO.		SEE SPECIFICATIONS		APVD				SCALE 1=2.0			
										FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-15654		REV C	
										SEE SPECIFICATIONS									