




SPECIFICATIONS			
CONTACT CARRIER MATERIAL	PVC		
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK		
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD		
COUPLING NUT MATERIAL/FINISH (P1,J1)	ALUMINUM/CLEAR-ANODIZED		
COUPLING NUT MATERIAL/PLATING (J2)	BRASS/NICKEL		
RATED CURRENT [A]	35 A COMBINED, 18 A DROP		
RATED VOLTAGE [V]	600 V		
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)		
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67		
APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238		
<u> </u>			

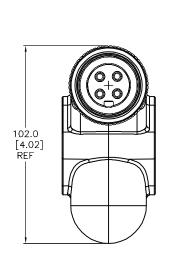


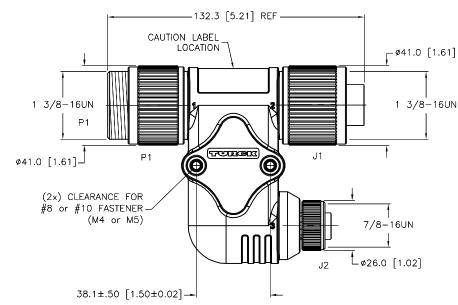

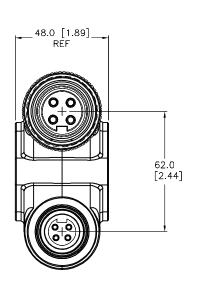

SOURCE DRAWING - FOR REFERENCE ONLY

SH-GSDA/GKDA/RKM 44



CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD

D	UPDATE RATED CURRENT	NF	04/26/19	69357
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 3RD ANGLE PROJECTION 2. 3. MATERIAL APVD SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DO NOT SCALE THIS DRAWING

*JW

DATE 04/19/10 SCALE 1=2.0

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax

REV

SHEET 1 OF 1

www.turck.us

UNIT OF MEASUREMENT

IDENTIFICATION NO. MILLIMETER [INCH] U2-15657 FILE: U2-15657