



	SPECIFICATIONS		
	CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK (P1,J1), TPU/BLACK (J2)	
	MOLDED HEAD MATERIAL/COLOR	PVC/BLACK	
	CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD	
	COUPLING NUT MATERIAL/FINISH (P1,J1)	ALUMINUM/CLEAR-ANODIZED	
	COUPLING NUT MATERIAL/PLATING (J2)	BRASS/NICKEL	
	RATED CURRENT [A]	30 A COMBINED, 15 A DROP	
	RATED VOLTAGE [V]	600 V	
	TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)	
	PROTECTION CLASS	MEETS IEC IP67	



DRAWING RELEASE

DESCRIPTION

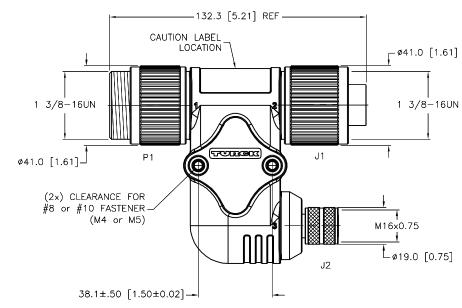

RELATED DOCUMENTS

2.


3.


05/25/11

DATE

ECO NO.

MATERIAL





SOURCE DRAWING - FOR REFERENCE ONLY

△ CAUTION:	
RISK OF ELECTRICAL SHOCK	
DO NOT DISCONNECT UNDER LOAD	۱D

		IXWC	10/2//
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD PJ	SCALE 1=2.0
		UNIT OF MEASUREMENT	
FINISH	CONTACT TURCK	MILLIMETE	ER [INCH]
SEE SPECIFICATIONS	FOR MORE INFORMATION		
		DO NOT SCALE	THIS DRAWING

3RD ANGLE PROJECTION

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED. DATE 10/27/09 DESCRIPTION DRFT SH-GSDA/GKDA/BKM 34

MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

REV

Α

SHEET 1 OF 1

3000 CAMPUS DRIVE

SCALE 1=2.0

IDENTIFICATION NO. R[INCH] U2-15659 FILE: U2-15659