
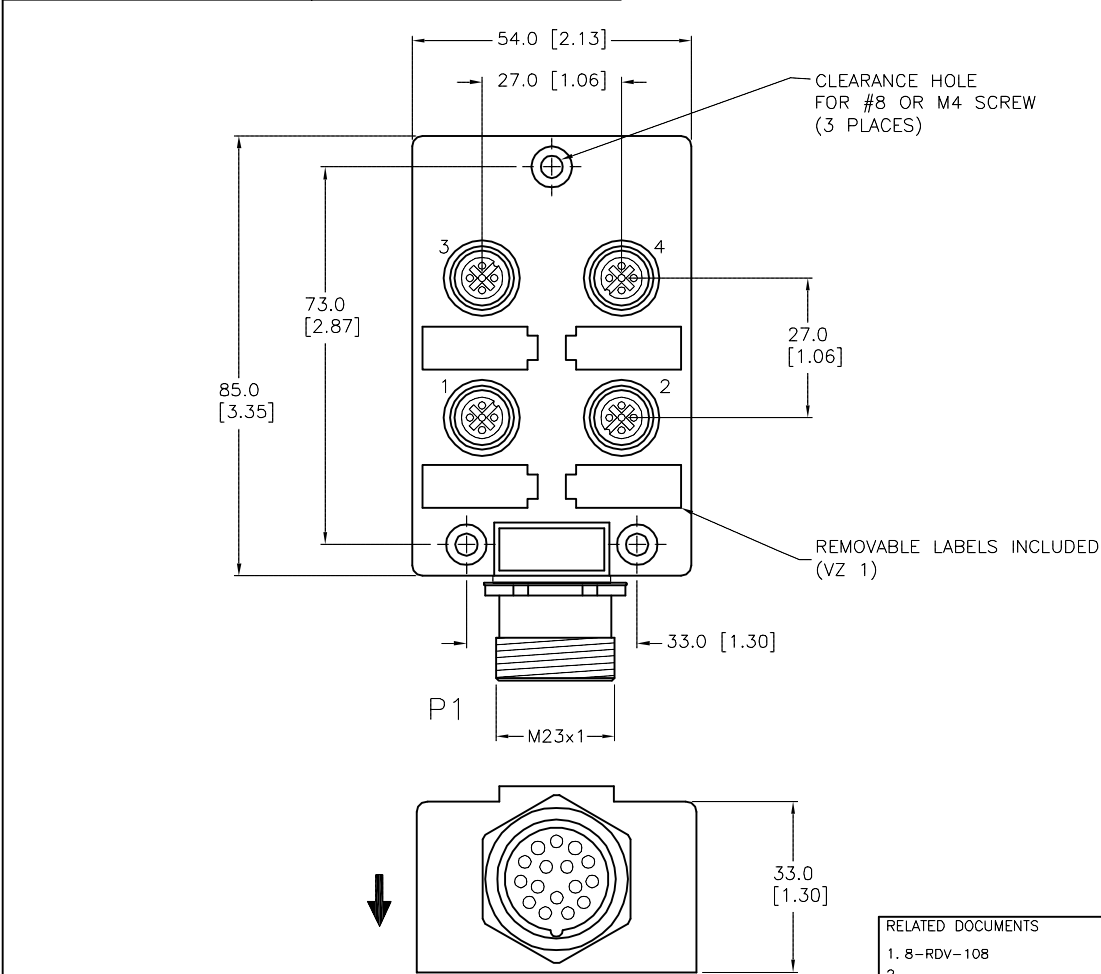


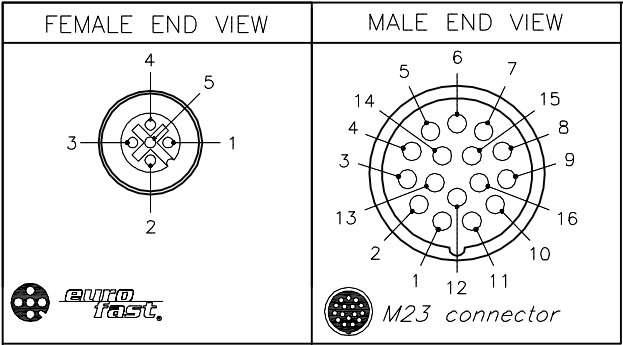

NOTE:


1. "/S3074" DESIGNATES KEYWAY ON HOMERUN CONNECTOR ON JUNCTION BOXES TO BE IN THE 6 O'CLOCK POSITION.

C	UPDATED CLOSURE CAPS	TV	09/15/15	48811
REV	DESCRIPTION	BY	DATE	ECO. NO.

SPECIFICATIONS	
CABLE DATA	
MATING CORDSET	CK 16-0 or CKN 16-16-*
MATERIAL	
HOUSING/COLOR	NYLON/BLUE
CONTACT CARRIERS/COLOR	TPU/BLACK
RECEPTACLE HOUSINGS	NICKEL PLATED BRASS
CONTACTS	GOLD PLATED COPPER ALLOY
SEALING RING	VITON O-RING
CONNECTOR HOUSING	NICKEL PLATED BRASS
ELECTRICAL DATA	
MAXIMUM VOLTAGE	100 VDC
MAXIMUM CURRENT	4 AMPS PER PORT, 8 AMPS TOTAL
SPACINGS	VDE 0110 GROUP C
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)



CLOSURE CAPS
(INCLUDED)

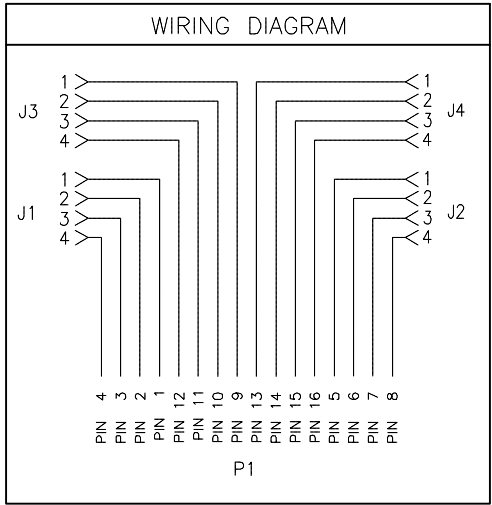

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 8-RDV-108 2. 3. 4.				DRFT RDS APVD		DATE 05/27/09 SCALE 1=1.5	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION VB 4X1.5N-CS16/S3074	
FINISH		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U2-15851	
						REV C	
						FILE: U2-15851	
						SHEET 1 OF 1	