




FEMALE END VIEW

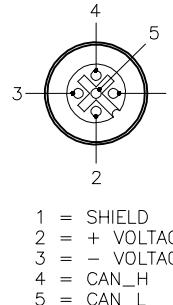

BOARD LAYOUT


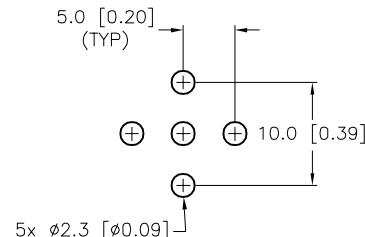


TYPICAL PANEL CUTOUT



SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NITRILE
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
NUMBER OF CONDUCTORS [AWG]	5 PRINTED CIRCUIT PINS
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
MAX. PANEL THICKNESS	3.0 [0.12]

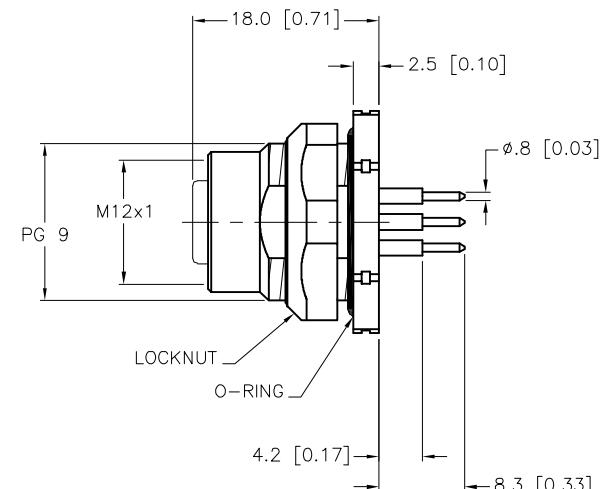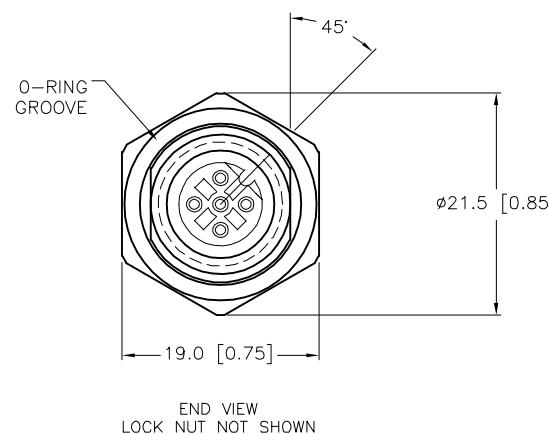

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.	2.		DRFT	RDS	DATE 08/14/09	DESCRIPTION
3.	4.		APVD	SCALE 1=.8		FKFDK 57-PCB
					UNIT OF MEASUREMENT	
					MILLIMETER [INCH]	IDENTIFICATION NO. U2-16256
					DO NOT SCALE THIS DRAWING	REV D
					FILE: U2-16256	SHEET 1 OF 1

D DRAWING PROCESSED AS PART OF ECO 33971 CBM 04/07/11 33971

REV DESCRIPTION BY DATE ECO NO.