




MALE END VIEW

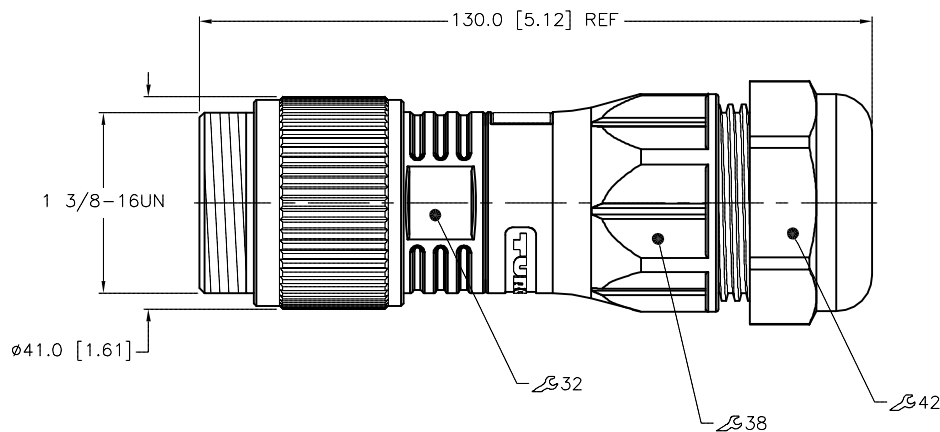


SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PVC/NYLON, BLACK
GLAND MATERIAL/COLOR	NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/FINISH	ALUMINUM/CLEAR-ANODIZED
SEAL MATERIAL/COLOR	NITRILE/BLACK
RATED CURRENT [A]	UP TO 40.0 A
RATED VOLTAGE [V]	600 V
MAXIMUM WIRE SIZE	8 AWG
TERMINATION METHOD	SCREW TERMINAL
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	IP 67/NEMA 6P
CABLE GRIP RANGE	9.0mm [0.35"] to 26.0mm [1.02"]



WIRE SIDE VIEW OF CONTACT HOLDER TO SHOW LABEL DETAILS

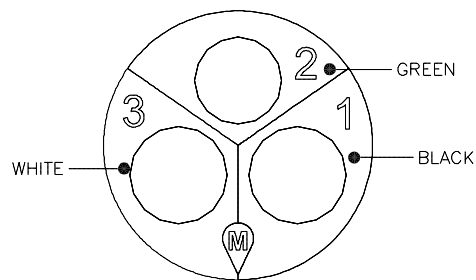

(SCALE 2:1)

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.			DRFT	RWC	DATE	09/10/09	DESCRIPTION GSDA 30-0
2.			APVD		SCALE	1=1.5	
3.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
4.			MILLIMETER [INCH]		U2-16365		B
MATERIAL		SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING	
FINISH		SEE SPECIFICATIONS		FILE: U2-16365		SHEET 1 OF 1	

B	UPDATE RATED CURRENT	TR	04/21/20	75816
REV	DESCRIPTION	BY	DATE	ECO NO.