


FEMALE END VIEW
3
O power tast.

SPECIFICATIONS					
CONTACT CARRIER MATERIAL/COLOR	PVC/NYLON, BLACK				
GLAND MATERIAL/COLOR	NYLON/BLACK				
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD				
COUPLING NUT MATERIAL/FINISH	ALUMINUM/CLEAR-ANODIZED				
SEAL MATERIAL/COLOR	NITRILE/BLACK				
RATED CURRENT [A]	UP TO 40.0 A				
RATED VOLTAGE [V]	600 VAC				
MAXIMUM WIRE SIZE	8 AWG				
TERMINATION METHOD	SCREW TERMINAL				
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)				
PROTECTION CLASS	IP 67/NEMA 6P				
CABLE GRIP RANGE	9.0mm [0.35"] to 26.0mm [1.02"]				

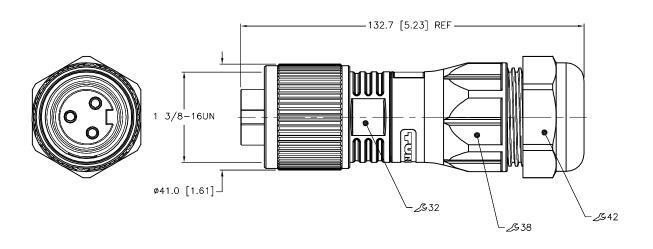





 C
 UPDATE RATED CURRENT
 TR
 04/21/20
 75816

 REV
 DESCRIPTION
 BY
 DATE
 ECO NO.

RISK

CAUTION:

A RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		IRC	MINNEAP 1-80 (763 (763	CAMPUS DRIVE OLIS, MN 55441 0-544-7769) 553-7300) 553-0708 fax w.turck.us
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	DRFT RWC	DATE 09/10/09 SCALE 1=1.5	DESCRIPTION	GKDA 30-0	
FINISH	REFERENCE ONLY CONTACT TURCK		EASUREMENT ER [INCH]	IDENTIFICATION NO.	U2-16369	REV
SEE SPECIFICATIONS	FOR MORE INFORMATION	DO NOT SCALE	THIS DRAWING	FILE: U2-16369		SHEET 1 OF 1