




## FEMALE END VIEW

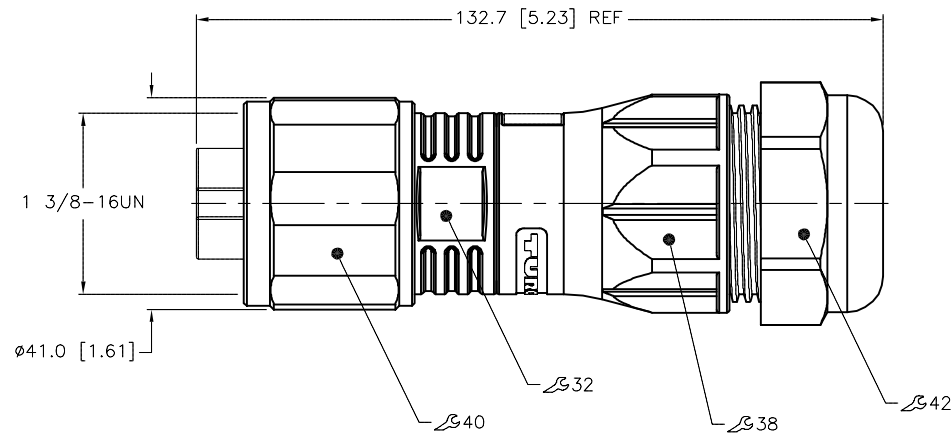


## SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PVC/NYLON, BLACK
GLAND MATERIAL/COLOR	NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
SEAL MATERIAL/COLOR	NITRILE/BLACK
RATED CURRENT [A]	UP TO 40.0 A
RATED VOLTAGE [V]	600 V
MAXIMUM WIRE SIZE	8 AWG
TERMINATION METHOD	SCREW TERMINAL
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	IP 67/NEMA 6P
CABLE GRIP RANGE	9.0mm [0.35"] to 26.0mm [1.02"]





WIRE SIDE VIEW  
OF CONTACT HOLDER  
TO SHOW LABEL DETAILS

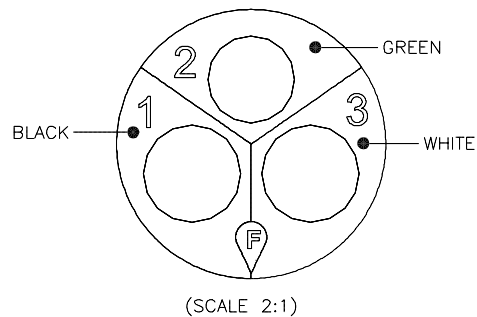

**CAUTION:**  
RISK OF ELECTRICAL SHOCK  
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	09/10/09	DESCRIPTION  GKDV 30-0			
SEE SPECIFICATIONS		APVD		SCALE	1=1.5				
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.  U2-16370		REV  B	
SEE SPECIFICATIONS			MILLIMETER [ INCH ]						
		DO NOT SCALE THIS DRAWING			FILE: U2-16370		SHEET 1 OF 1		

B	UPDATE RATED CURRENT	TR	04/21/20	75816
REV	DESCRIPTION	BY	DATE	ECO. NO.