


FEMALE END VIEW
3 2 4 1
.power iast.

SPECIFICATIONS							
CONTACT CARRIER MATERIAL/COLOR	PVC/NYLON, BLACK						
GLAND MATERIAL/COLOR	NYLON/BLACK						
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD						
COUPLING NUT MATERIAL/FINISH	ALUMINUM/CLEAR-ANODIZED						
SEAL MATERIAL/COLOR	NITRILE/BLACK						
RATED CURRENT [A]	UP TO 35.0 A						
RATED VOLTAGE [V]	600 V						
MAXIMUM WIRE SIZE	8 AWG						
TERMINATION METHOD	SCREW TERMINAL						
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)						
PROTECTION CLASS	IP 67/NEMA 6P						
CABLE GRIP RANGE	9.0mm [0.35"] to 26.0mm [1.02"]						



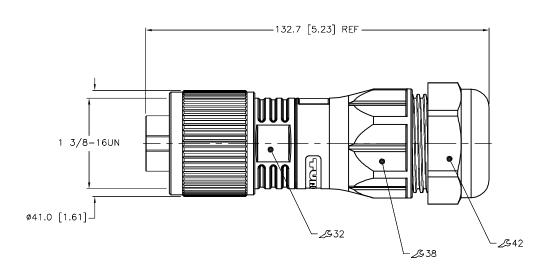

WIRE SIDE VIEW OF CONTACT HOLDER TO SHOW LABEL DETAILS



B UPDATE RATED CURRENT

REV DESCRIPTION

75819

ECO NO.

RDS 04/22/20

DATE

CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUME 1. 2. 3. 4.	ENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.)	RC	MINNEAF 1-80 (763 (763	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL		ALL DIMENSIONS	DRFT	RWC	DATE 09/10/09 SCALE 1=1.5	DESCRIPTION	GKDA 40-0		
555	EE SPECIFICATIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT			IDENTIFICATION NO.	REV		
FINISH SEE SPECI	FICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]		U2-16371			В	
322 37 208 107 17 17 17 17 17 17 17 17 17 17 17 17 17				NOT SCALE	THIS DRAWING	FILE: U2-16371		SHEET	1 OF 1