
FEMALE END VIEW
3 2 2 4 1
power iast.

SPECIFICATIONS					
CONTACT CARRIER MATERIAL/COLOR	PVC/NYLON, BLACK				
GLAND MATERIAL/COLOR	NYLON/BLACK				
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD				
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED				
SEAL MATERIAL/COLOR	NITRILE/BLACK				
RATED CURRENT [A]	UP TO 35.0 A				
RATED VOLTAGE [V]	600 V				
MAXIMUM WIRE SIZE	8 AWG				
TERMINATION METHOD	SCREW TERMINAL				
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)				
PROTECTION CLASS IP 67/NEMA 6P					
CABLE GRIP RANGE	9.0mm [0.35"] to 26.0mm [1.02"]				





RDS 04/22/20

DATE

75819

ECO NO.

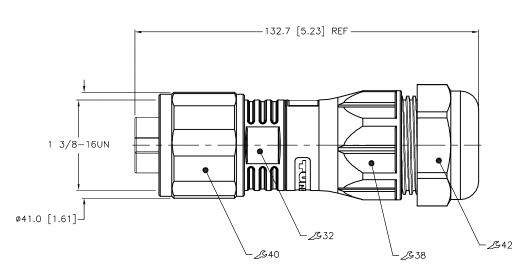

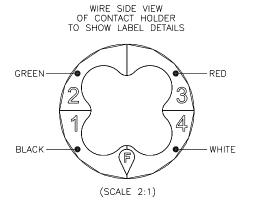

B UPDATE RATED CURRENT

REV DESCRIPTION

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RC	MINNEAP(1-800 (763) (763)	CAMPUS OLIS, MN 0-544-7) 553-7) 553-0 w.turck.u	1 55441 7769 300 708 fax
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT RWC	DATE 09/10/09 SCALE 1=1.5	GKDV 40-0			
FINISH		FERENCE ONLY UNIT OF MEASUREMENT DINTACT TURCK MILLIMETER [INCH]		IDENTIFICATION NO. U2-16372			rev B
SEE SPECIFICATIONS		DO NOT SCALE	THIS DRAWING	FILE: U2-16372		SHEET	1 OF 1