
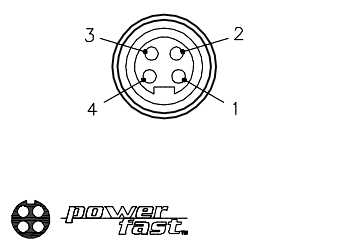
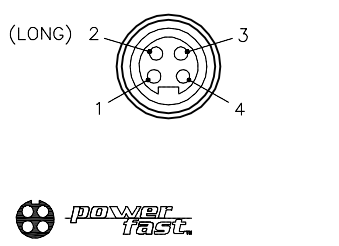
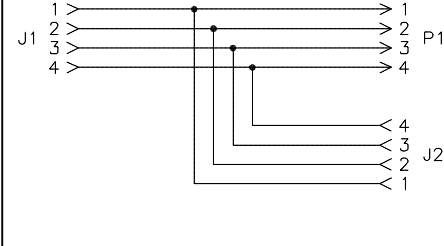
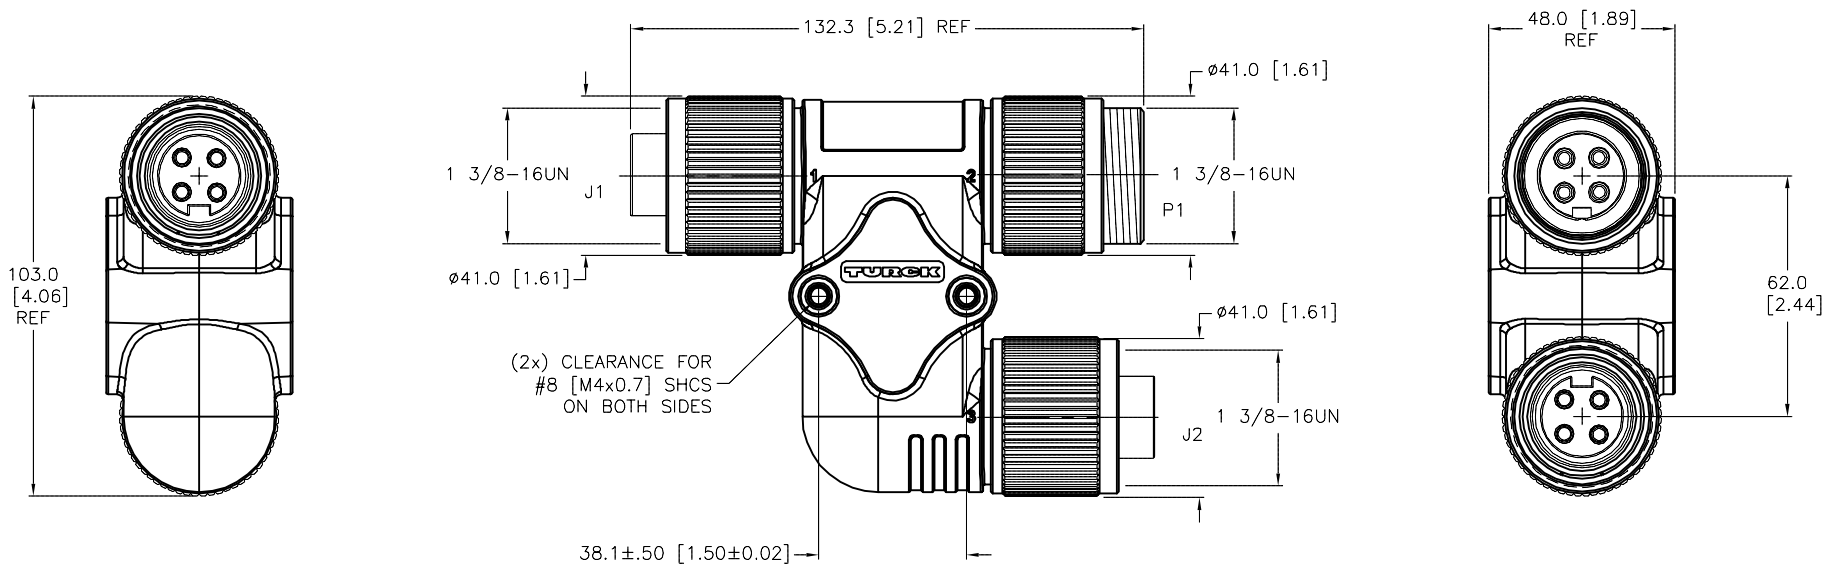



FEMALE END VIEW (J1,J2)	MALE END VIEW (P1)	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/PLATING	ALUMINUM/CLEAR-ANODIZED
			RATED CURRENT [A]	35 A
			RATED VOLTAGE [V]	600 VAC
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K



**CAUTION:**  
RISK OF ELECTRICAL SHOCK  
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

<div>RELATED DOCUMENTS</div> <div>1. 2. 3. 4.</div>					<div>3RD ANGLE PROJECTION</div> <div></div>		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div> <div></div>				
					<div>MATERIAL</div> <div>SEE SPECIFICATIONS</div>		<div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div>		<div>DRFT</div> <div>*JW</div>	<div>DATE</div> <div>04/16/10</div>	<div>DESCRIPTION</div> <div>SH-GKDA/GSDA/GKDA 40</div>		
									<div>APVD</div>	<div>SCALE</div> <div>1=2.0</div>			
									<div>FINISH</div> <div>SEE SPECIFICATIONS</div>		<div>CONTACT TURCK FOR MORE INFORMATION</div>		<div>UNIT OF MEASUREMENT</div> <div>MILLIMETER [ INCH ]</div>
<div>DO NOT SCALE THIS DRAWING</div>		<div>FILE: U2-16636</div>		<div>SHEET 1 OF 1</div>									
<div>C</div>	<div>UPDATE RATED CURRENT</div>			<div>RDS</div>	<div>04/12/19</div>	<div>69350</div>							
<div>REV</div>	<div>DESCRIPTION</div>			<div>BY</div>	<div>DATE</div>	<div>ECO NO.</div>							