




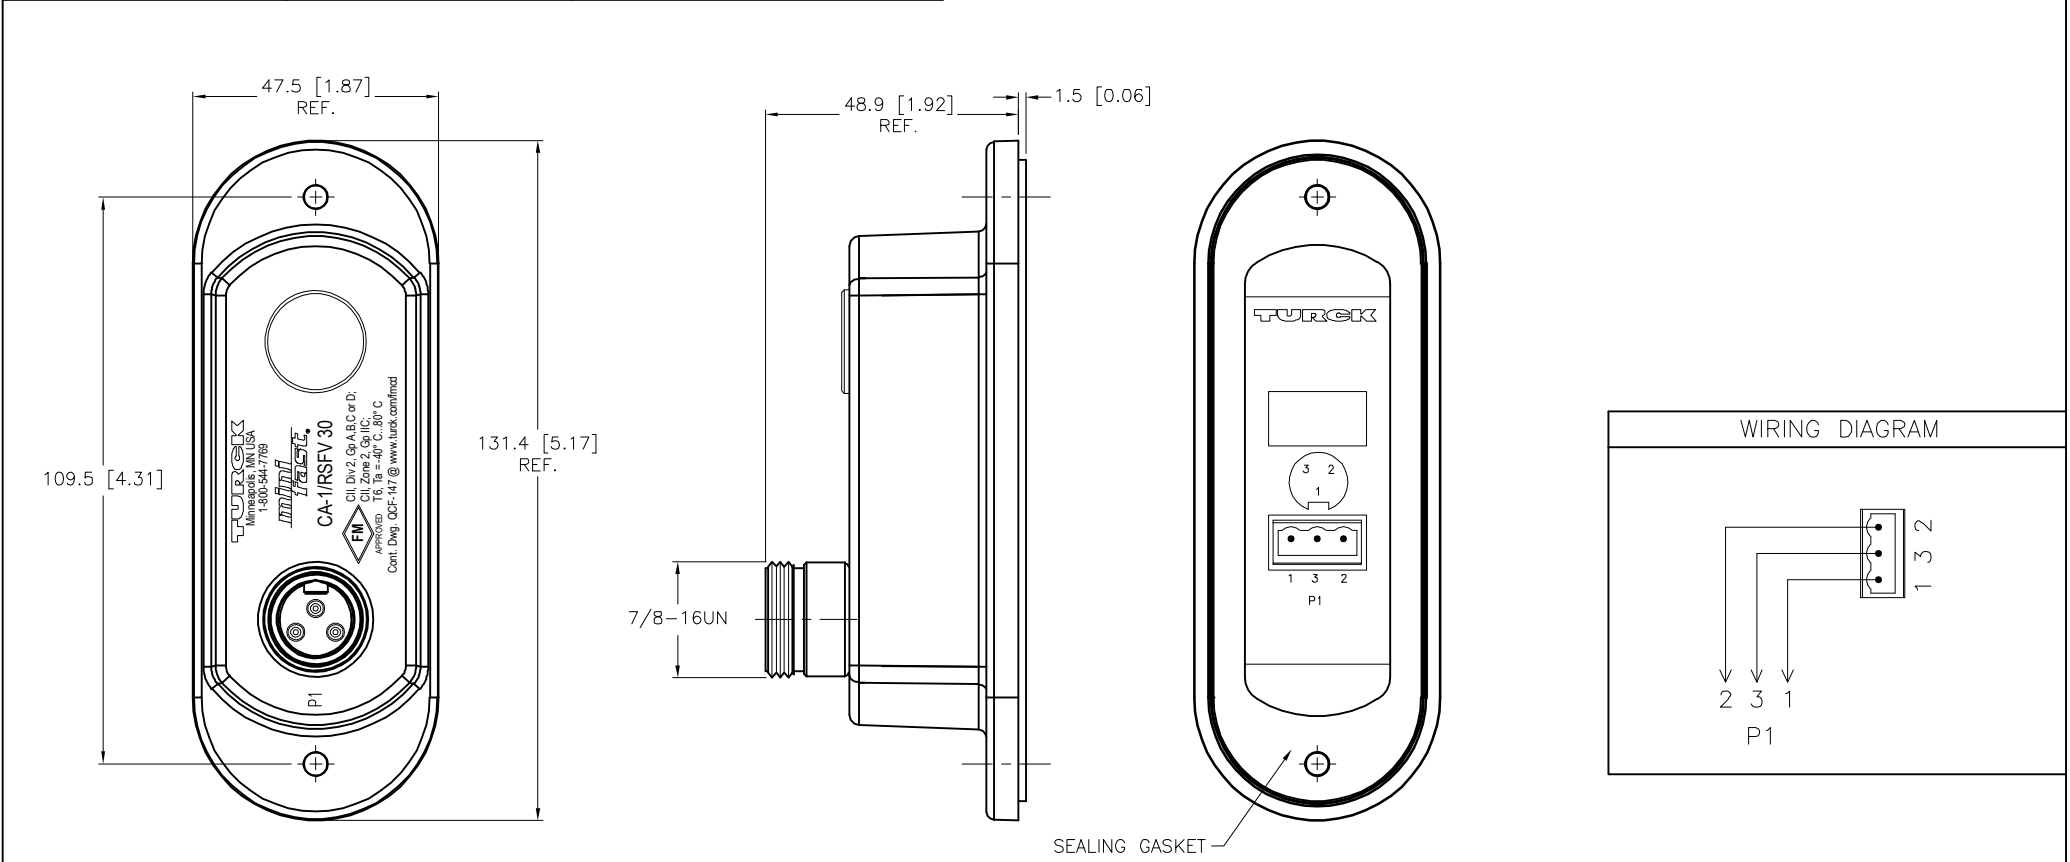


MALE END VIEW	COVER SCREWS INCLUDED	TERMINAL PLUGS INCLUDED	SPECIFICATIONS	
 	 FORM 8 CONDUIT BODIES: 10-24 SCREWS		HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
	 MARK 9 CONDUIT BODIES: 8-32 SCREWS		RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			CONTACT CARRIERS/COLOR	TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			OPERATING VOLTAGE	250 V
			OPERATING CURRENT	9.0 A PER CONDUCTOR
			PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
			OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT RWC		DATE 03/23/10	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.5	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
FINISH					MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
SEE SPECIFICATIONS									CA-1/RSFV 30	
									U2-17100	
									REV E	
									FILE: U2-17100	
									SHEET 1 OF 1	