



FEMALE END VIEW





SPECIFICATIONS	
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
MAXIMUM WIRE SIZE	18 AWG
CABLE GRIP RANGE	6–8mm
TEMPERATURE RATING	–40°C to +85°C (–40°F to +185°F)
PROTECTION CLASS	IEC IP67
WIRE TERMINATION	SCREW TERMINAL

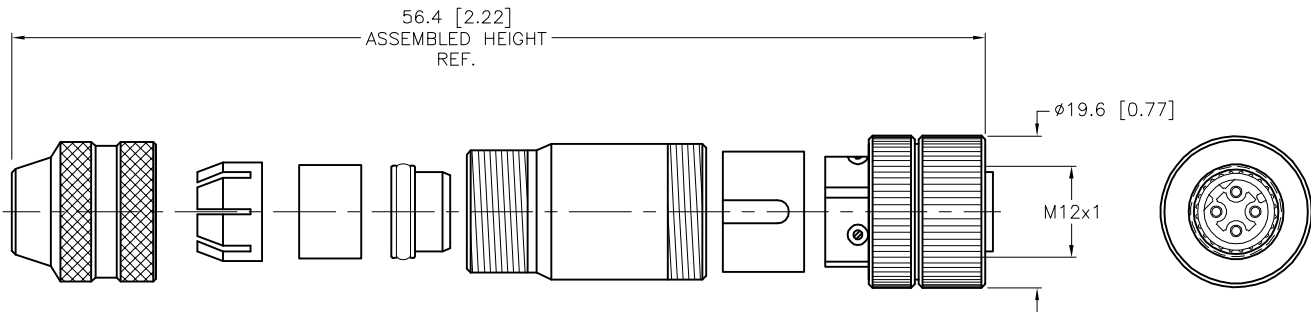


SOURCE DRAWING – FOR REFERENCE ONLY

ALL METAL SHIELDED FIELD WIREABLE CONNECTOR

B	REMOVE FIFTH PIN	NF	06/19/18	65829
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS	
1. 2. 3. 4.	
MATERIAL	SEE SPECIFICATIONS
FINISH	SEE SPECIFICATIONS

3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.
ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		
CONTACT TURCK FOR MORE INFORMATION		

DRFT	RDS	DATE	05/04/10
APVD		SCALE	1=1.0
UNIT OF MEASUREMENT		MILLIMETER [INCH]	
DO NOT SCALE THIS DRAWING			



3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DESCRIPTION	CMBD 8141–0/PG9
IDENTIFICATION NO.	U2–17341
REV	B

FILE: U2–17341	SHEET 1 OF 1
----------------	--------------