



MALE END VIEW





- 1 = BARE (SHIELD)
- 2 = RED (+ VOLTAGE)
- 3 = BLACK (- VOLTAGE)
- 4 = WHITE (CAN_H)
- 5 = BLUE (CAN_L)




SPECIFICATIONS

HOUSING MATERIAL/COLOR	GLASS FILLED NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	DIECAST ZINC/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	250 V
MAXIMUM WIRE SIZE	16 AWG
TERMINATION METHOD	SCREW TERMINAL
TEMPERATURE RATING	-25°C to +85°C (-13°F to +185°F)
PROTECTION CLASS	IP 67
CABLE GRIP RANGE	PG 9 = 6-8mm

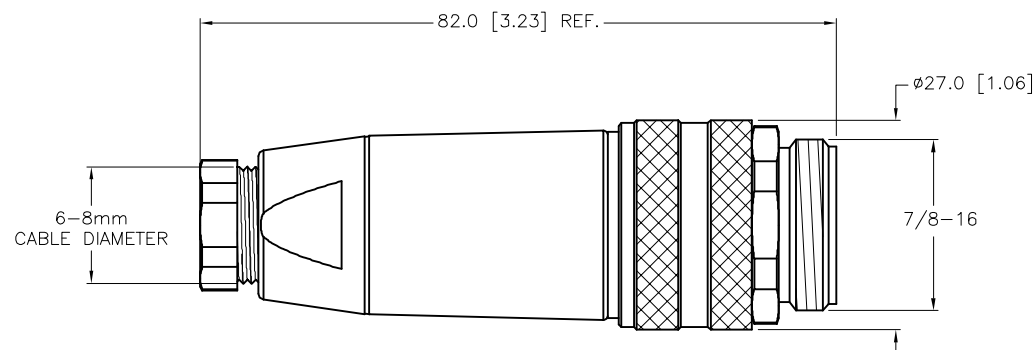

WIRE SIDE VIEW
OF CONTACT HOLDER
TO SHOW LABEL DETAILS

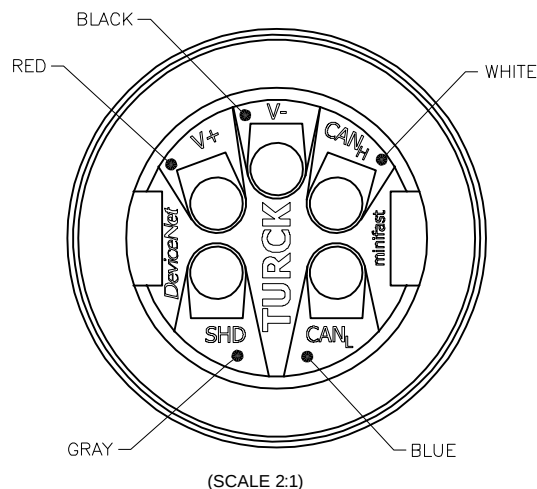


NOTES:

1. "/C1265" DESIGNATES ADDING PART NUMBERS TO BOM AND RE-PACKAGE.

10163216 PINCH RING, PG9, 8.5MM
10163225 PRESSING SCREW, PG9, 8.5MM

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	04/26/10	DESCRIPTION BS 4151-0/9/DNET/C1265			
SEE SPECIFICATIONS		APVD		SCALE	1=1.0				
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U2-17348		REV C	
SEE SPECIFICATIONS									
	CONTACT TURCK FOR MORE INFORMATION	FILE: U2-17348				SHEET 1 OF 1			