

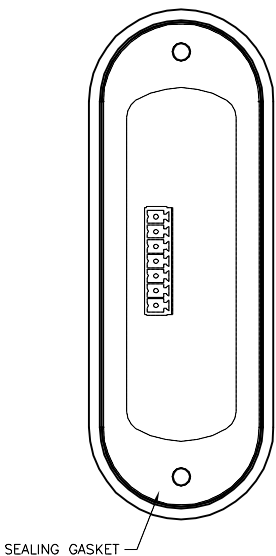



SPECIFICATIONS	
HOUSING MATERIAL/COLOR	NYLON/BLACK
RECEPTACLE HOUSING MAT'L/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIER/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE [V]	300 V
OPERATING CURRENT [A]	4.0 A
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–30°C to +80°C (–22°F to +176°F)

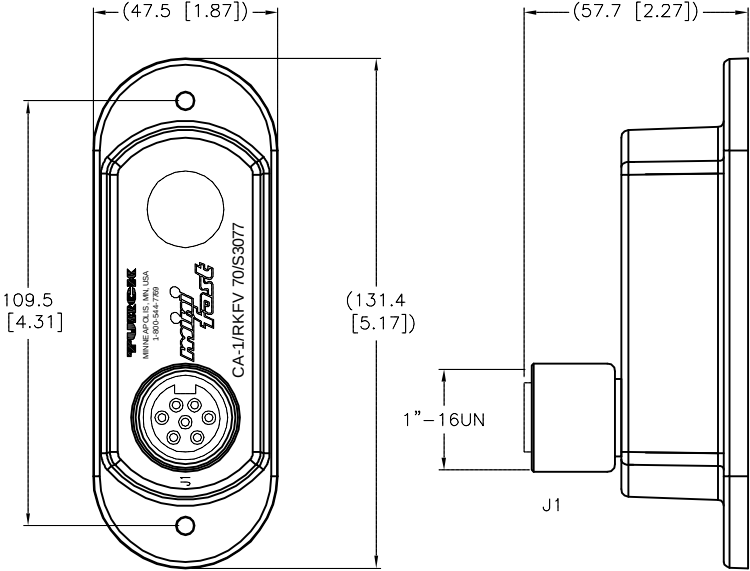


WIRING DIAGRAM

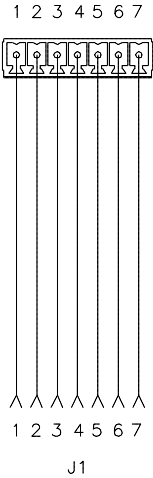

COVER SCREWS INCLUDED



MARK 9 CONDUIT BODIES:
8–32 SCREWS



NOTES:

1. "/S3077" DESIGNATES ADAPTOR PLATE FOR 3/4" FORM 7 TYPE CONDUIT BODIES ADDED TO THE STANDARD CONDUIT COVERS. (SEE PAGE 2)

SOURCE DRAWING – FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1–800–544–7769 (763) 553–7300 (763) 553–0708 fax www.turck.us	
1. 2. 3. 4.				DRFT APVD		RDS T.S.		DATE 08/24/10 SCALE 1=2.0	
MATERIAL				UNIT OF MEASUREMENT		DESCRIPTION		CA–1/RKFV 70/S3077	
SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.		U2–18061	
FINISH				DO NOT SCALE THIS DRAWING		FILE: U2–18061		REV C	
SEE SPECIFICATIONS								SHEET 1 OF 2	