
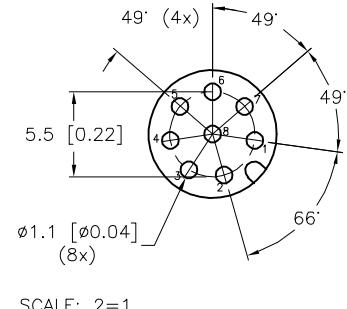
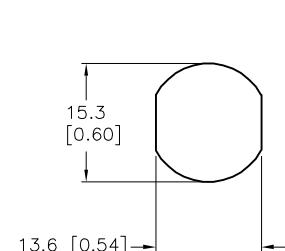


FEMALE END VIEW



TYPICAL PANEL CUTOUT

TYPICAL BOARD LAYOUT

SPECIFICATIONS

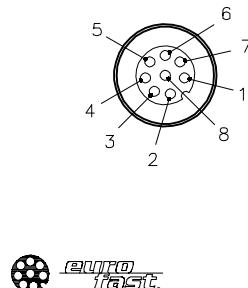

CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING, LOCKNUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
O-RING MATERIAL	NITRILE
RATED CURRENT [A]	1.5 A
RATED VOLTAGE [V]	30 VAC/36 VDC
NUMBER OF CONDUCTORS [AWG]	PRINTED CIRCUIT PINS
TEMPERATURE RATING	-40°C TO +90°C (-40°F TO +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
MAX. PANEL THICKNESS	3.0 [0.12]

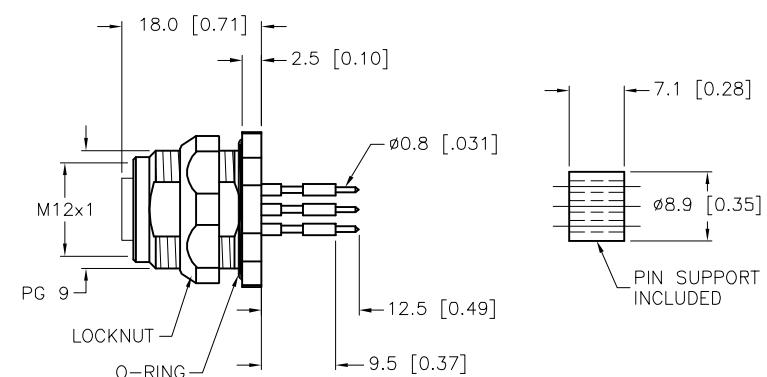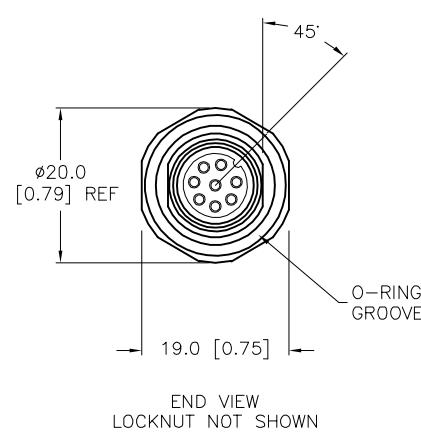

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.	2.		DRFT	*CK	DATE	10/25/10
3.	4.	APVD	SCALE	1=1.0	DESCRIPTION	FKFDV 8
SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT	IDENTIFICATION NO.	
FINISH		CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]	REV C	
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		U2-18252	FILE: U2-18252	
C	NOTATE THE KEYWAY IS 45° FROM THE MOUNTING FLAT	RDS	04/25/22	77572		SHEET 1 OF 1
REV	DESCRIPTION	BY	DATE	ECO NO.		