

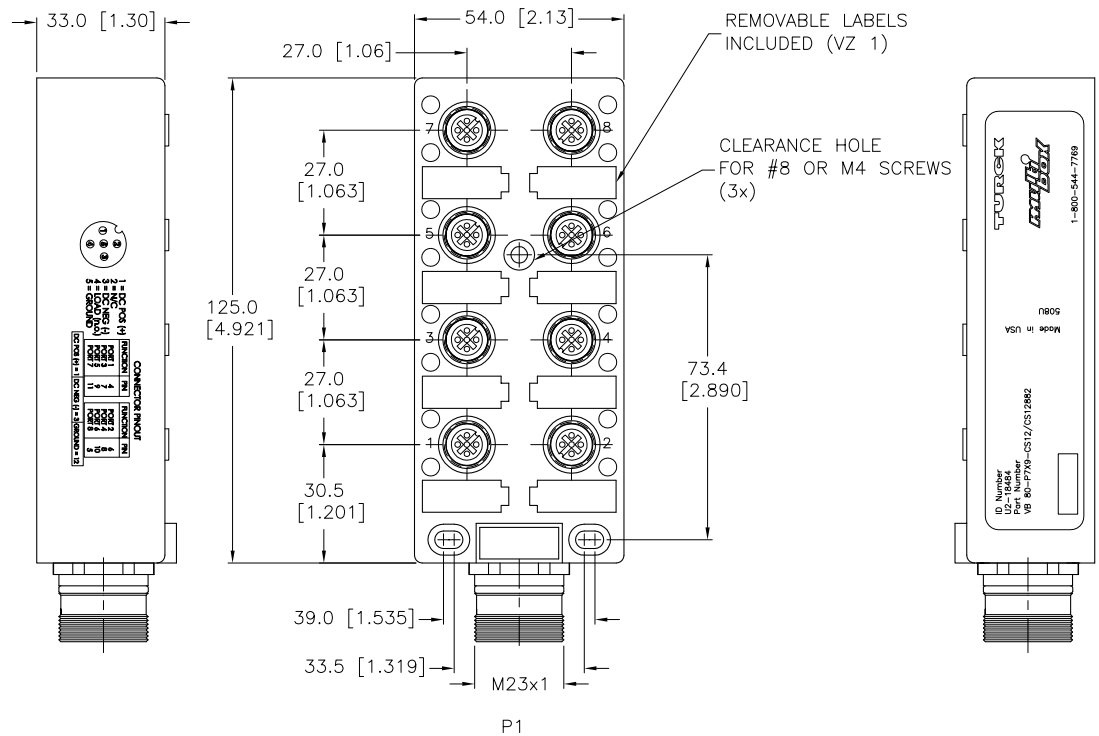



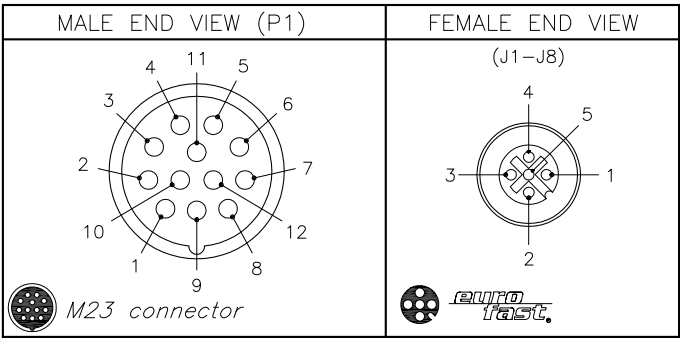


NOTES:

1. "/CS12882" DESIGNATES USING CUSTOM WIRING MATCHING 4 AND 6 PORT BOXES.

SPECIFICATIONS	
HOUSING MATERIAL/COLOR	NYLON/YELLOW
CONTACT CARRIER MATERIAL	NYLON OR TPU (J1-J8), PBT (P1)
CONTACTS MATERIAL/PLATING	BRASS/GOLD (J1-J8)
DISCONNECT MATERIAL/PLATING	BRASS/NICKEL (P1)
OPERATING VOLTAGE	10-48 VDC
LED FUNCTION	FOR PNP SENSOR OUTPUT
MAXIMUM CURRENT	4 AMPS PER PORT, 5 AMPS TOTAL
PROTECTION CLASS	IP67
OPERATION TEMPERATURE RANGE	-30°C to +90°C (-25°F to +194°F)

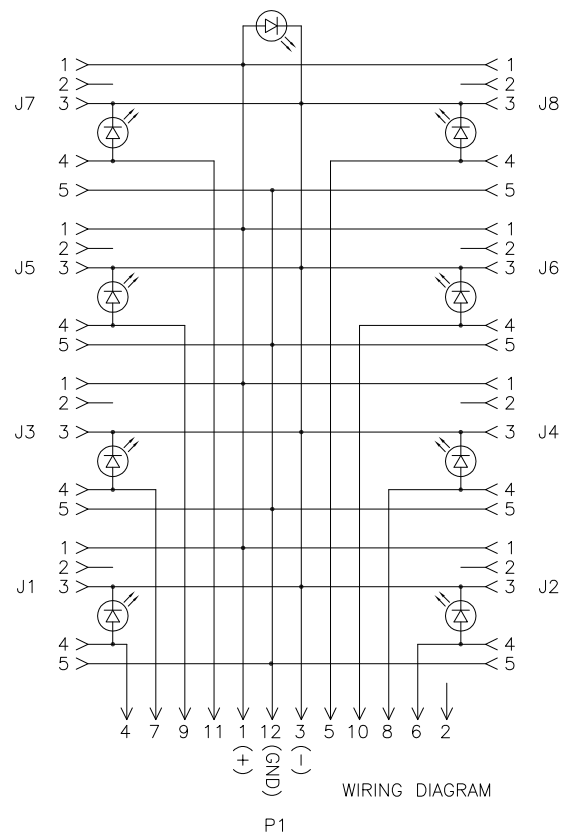

SOURCE DRAWING - FOR REFERENCE ONLY

 VZ 3 CLOSURE CAPS (INCLUDED)					RELATED DOCUMENTS		3RD ANGLE PROJECTION		 High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com					
					1. 2. 3. 4.											
NOTES: 1. "/CS12882" DESIGNATES USING CUSTOM WIRING MATCHING 4 AND 6 PORT BOXES.					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RDS	DATE	12/15/10	DESCRIPTION VB 80-P7X9-CS12/CS12882		
					SEE SPECIFICATIONS				DSGN		SCALE		1=2.0			
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV	
					SEE SPECIFICATIONS				MILLIMETER [INCH]				U2-18484		B	
									DO NOT SCALE THIS DRAWING				FILE: U2-18484		SHEET 1 OF 1	
B	DRAWING PROCESSED AS PART OF ECO 33971			CBM	04/07/11	33971										
REV	DESCRIPTION			BY	DATE	ECO NO.										