

MALE END VIEW	CABLE GLAND	S	SPECIFICATIONS			
		CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK			
3		MOLDED HEAD MATERIAL/COLOR	NYLON/BLACK			
		CONTACT MATERIAL/PLATING	BRASS/GOLD			
4		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
(((Ččči)))		RATED CURRENT [A]	8.0 A			
		RATED VOLTAGE [V]	600 V			
		CABLE RANGE	6.0mm to 8.0mm and 9.0 mm to 16.0 mm			
6 (LONG)	(SEE NOTE 1)	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
		PROTECTION CLASS	MEETS IEC IP67			
inini tast		MAX. CONDUCTOR SIZE	14 AWG			
tast,						
-	-ø36.5 [1.44]					



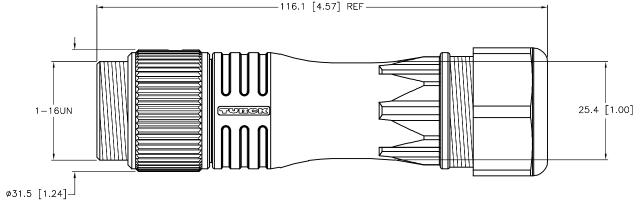

SOURCE DRAWING - FOR REFERENCE ONLY

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		IRCK (763) (763)	AMPUS DRIVE LIS, MN 55441 -544-7769 553-7300 553-0708 fax Aturck.us
	MATERIAL			DATE 04/07/11	DESCRIPTION BS 716B61-0/21/SJ	3115
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD UNIT OF ME	SCALE 1=1.0	1=1.0 MENT	
	FINISH	CONTACT TURCK	MILLIMETE	ER [INCH]	U2-18711	REV
803	SEE SPECIFICATIONS	FOR MORE INFORMATION				Ŭ
NO.			DO NOT SCALE THIS DRAWING		FILE: U2-18711	SHEET 1 OF 1

NOTES:

1. "/S3115" DESIGNATES 6-8 MM CABLE GLAND ADDED TO THE FIELD WIREABLE.

			CONTACT TURCK	M			
	ADD LONG PIN	NF	04/20/20	75803	SEE SPECIFICATIONS	FOR MORE INFORMATION	
RE	DESCRIPTION	BY	DATE	ECO NO.			DO