

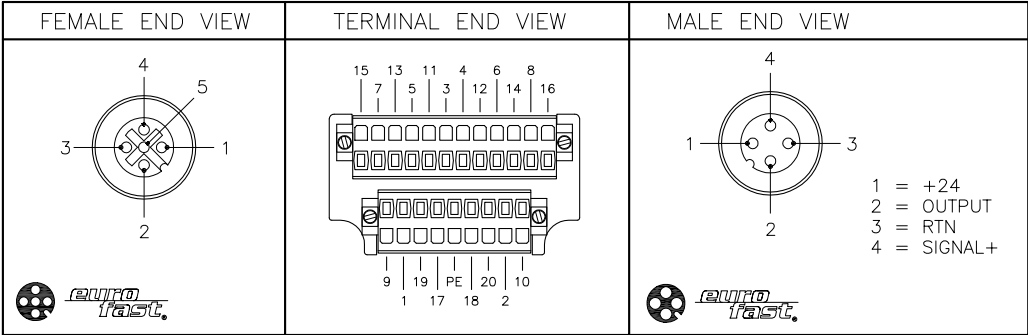


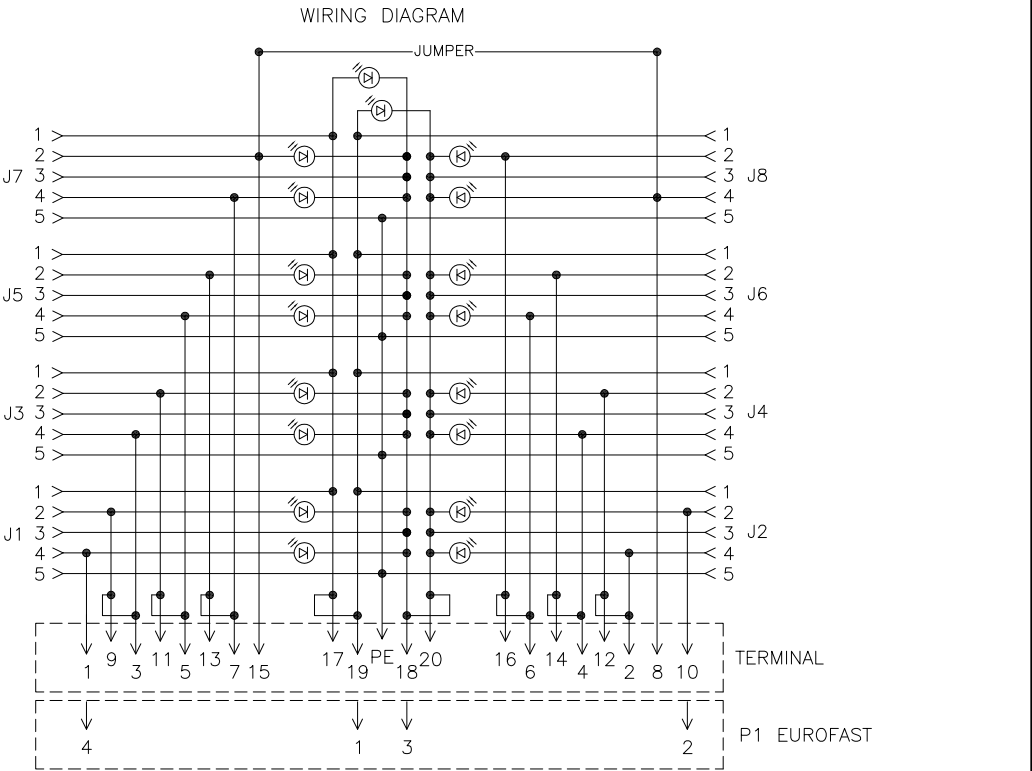

SPECIFICATIONS	
HOUSING MATERIAL/COLOR	PBT/BLACK
RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
CONTACT CARRIER MATERIAL	NYLON or TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
SEALING, RECEPTACLE	VITON O-RING
SEALING, HOUSING	TPU FOAM
OPERATING VOLTAGE [V]	10-30 V
OPERATING CURRENT [A]	3.0 A
PROTECTION CLASS to DIN 40050	IP 68 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-20°C to +90°C (-4°F to +194°F)

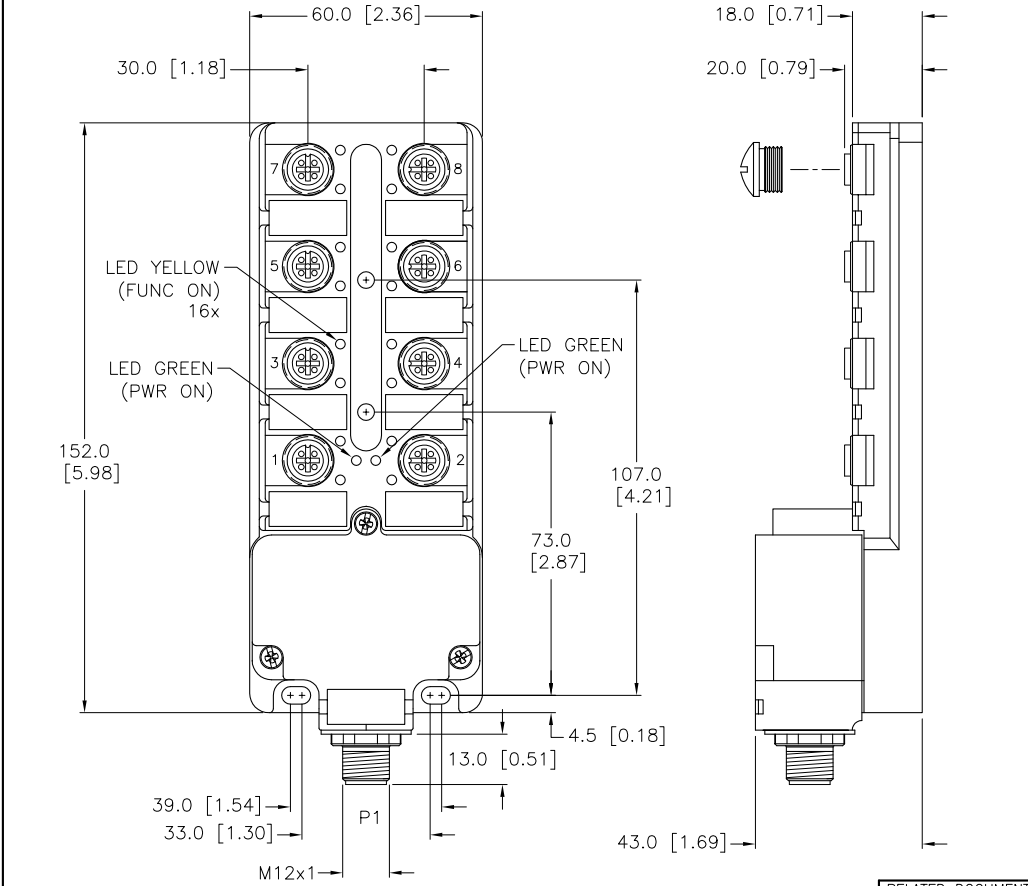

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/CS13196" DESIGNATES CUSTOM WIRING.

2. KEYWAY ORIENTATION OF CONNECTOR P1 IS NOT CRITICAL.

CLOSURE CAPS (2 INCLUDED)

A	DRAWING RELEASE	CK	05/12/11	
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				DRFT RDS		DATE 04/11/11	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DSGN		SCALE 1=2.0	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
FINISH		MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		8MB12-5P4-K-FK-FS 4.4/CS13196	
SEE SPECIFICATIONS						IDENTIFICATION NO.	
						U2-18767	
						REV	
						A	
						FILE: U2-18767	
						SHEET 1 OF 1	