



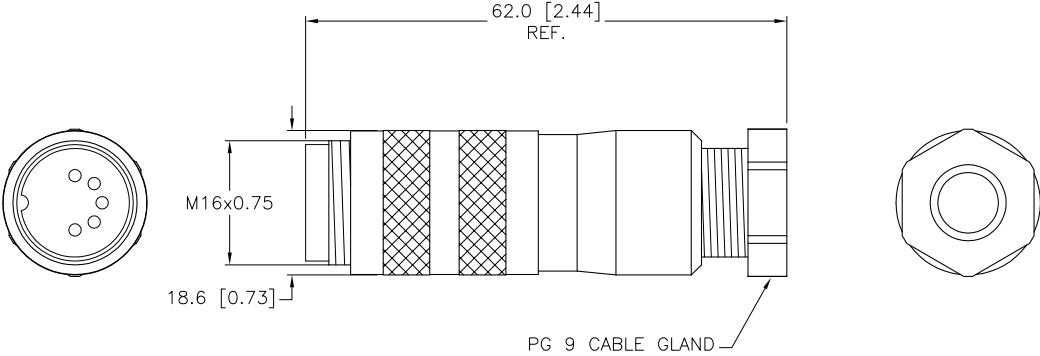
MALE END VIEW




 M16 connector

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	6.0 A
RATED VOLTAGE [V]	60 V
TEMPERATURE RANGE	-30°C to +95°C
PROTECTION CLASS	MEETS IEC IP67
CABLE GLAND	PG 9 - ACCEPTS 6-8mm CABLE



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.				3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	<div><div>TURCK INC</div><div>High Technology Sensors and Automations Controls</div></div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>					
MATERIAL SEE SPECIFICATIONS				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	CK	DATE	09/08/11	DESCRIPTION BSS 5-0		
FINISH SEE SPECIFICATIONS					APVD	P.J.	SCALE	1=1.0			
					UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO. U2-19350		REV A	
				CONTACT TURCK FOR MORE INFORMATION			DO NOT SCALE THIS DRAWING			FILE: U2-19350	SHEET 1 OF 1

A	DRAWING RELEASE	CK	10/11/11	
REV	DESCRIPTION	BY	DATE	ECO NO.