



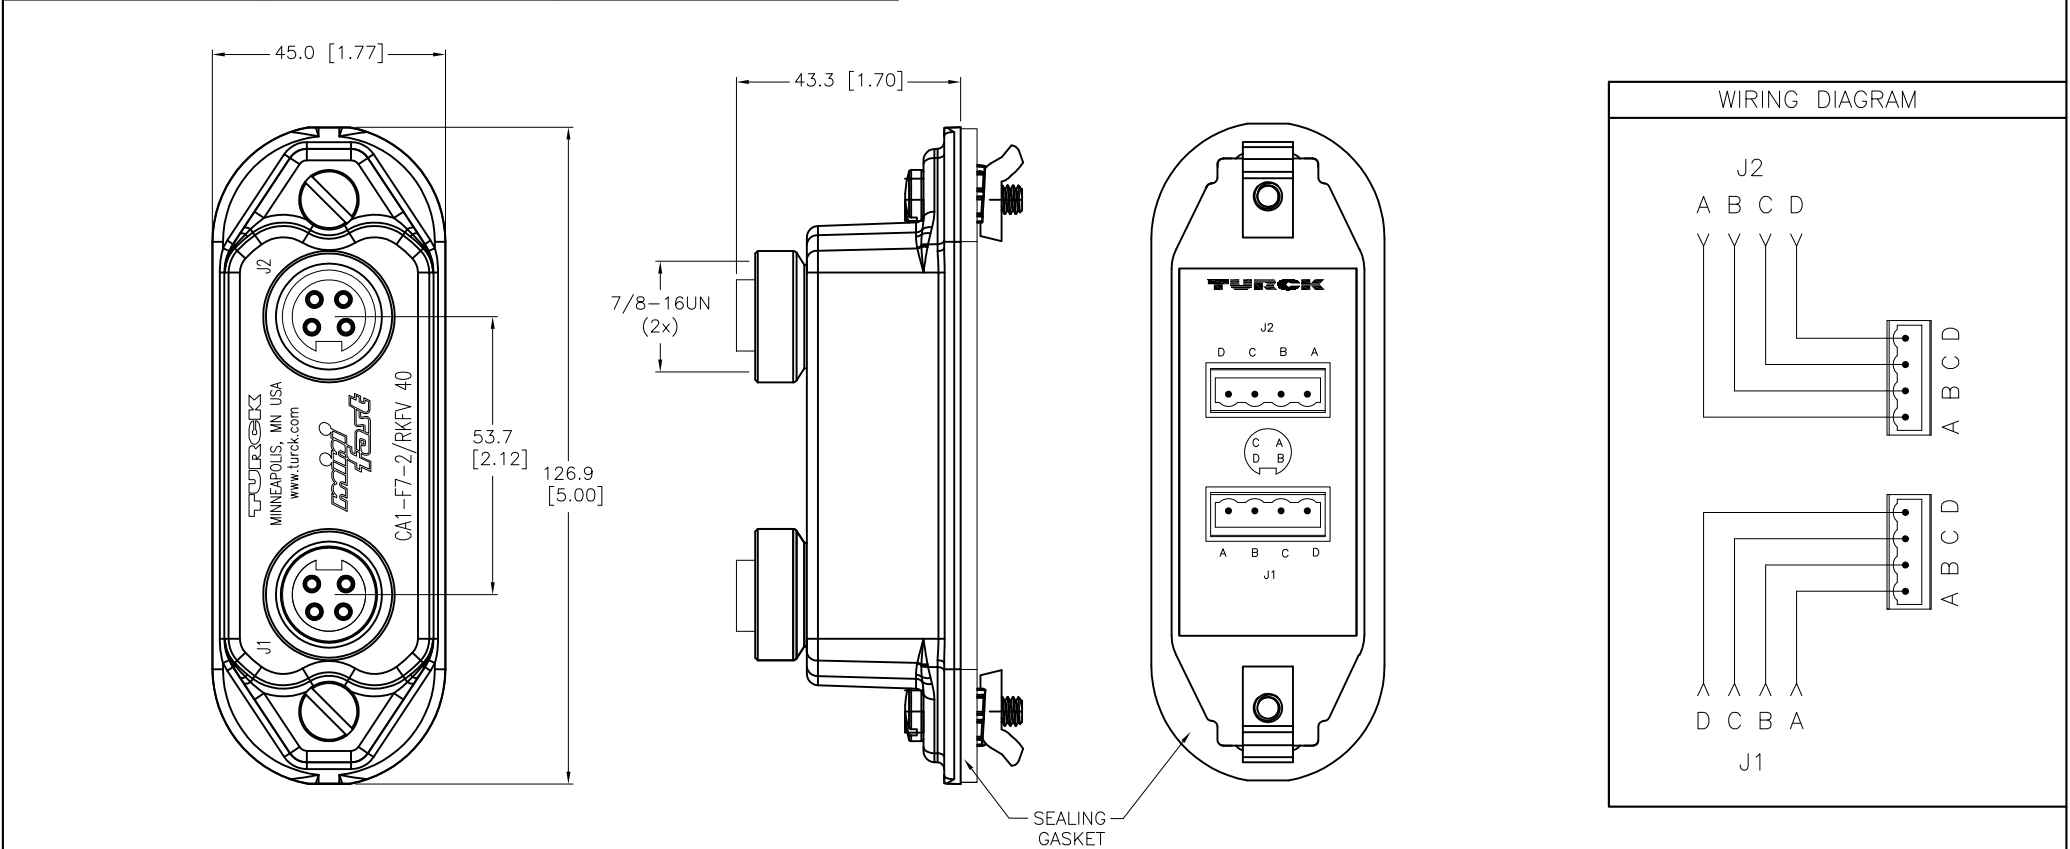


J1, J2 CONNECTORS	TERMINAL BLOCK PLUGS	TERMINAL PLUGS INCLUDED	SPECIFICATIONS	
 			HOUSING MATERIAL/COLOR	NYLON/BLACK
			RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			CONTACT CARRIER MATERIAL	TPU
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			OPERATING VOLTAGE	250 V
			OPERATING CURRENT	9.0 A PER CONDUCTOR
			PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
			OPERATING TEMPERATURE	–30°C to +80°C (–22°F to +176°F)



SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com				
					1.				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RDS	DATE 03/27/12		DESCRIPTION CA1-F7-2/RKFV 40	
					2.						APVD		D.E.	SCALE 1=1.5			
					3.						MATERIAL		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-19354		REV A
4.		SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION													
		FINISH															
		SEE SPECIFICATIONS															
A	DRAWING RELEASE			RDS	08/02/12												
REV	DESCRIPTION			BY	DATE	ECO NO.					FILE: U2-19354		SHEET 1 OF 1				