
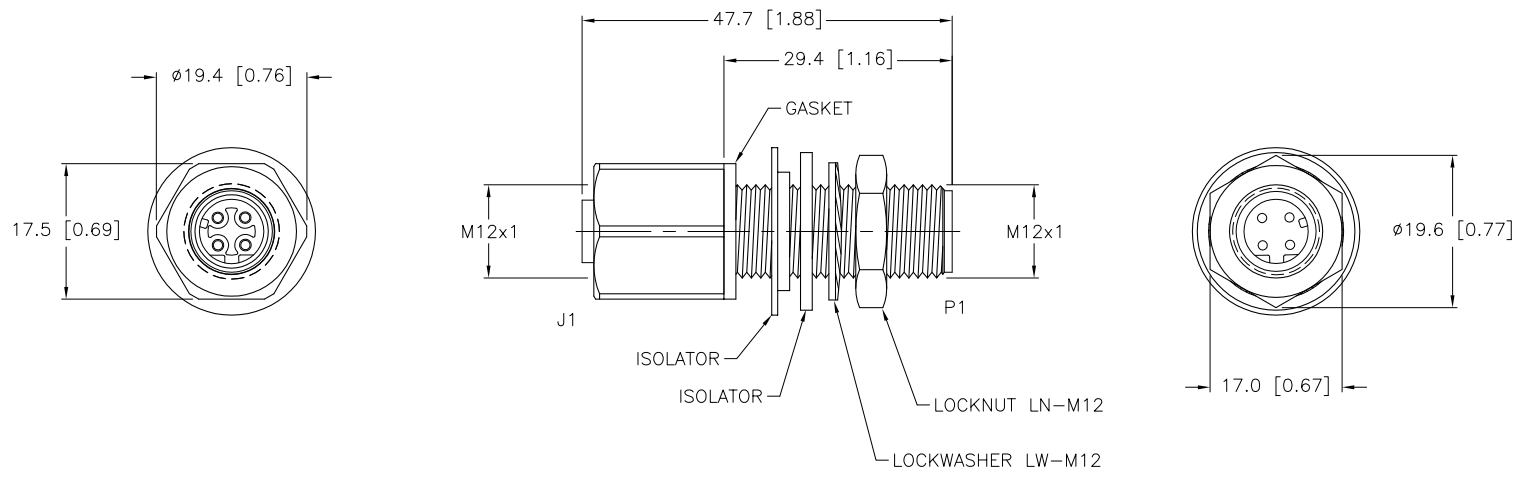


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON, TPU or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	150 V
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
GASKET MATERIAL	NITRILE (BUNA N)
ISOLATOR MATERIAL	NYLON

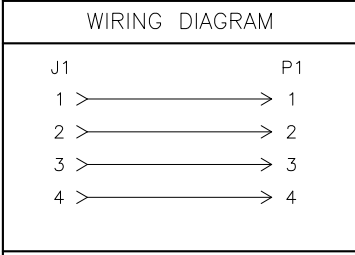

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT KMY DATE 11/21/11	DESCRIPTION FKDV FSDV 44/M12	
FINISH SEE SPECIFICATIONS	APVD A.A. SCALE 1=1.0		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-19500
DO NOT SCALE THIS DRAWING		FILE: U2-19500		SHEET 1 OF 1	

A	DRAWING RELEASE	KMY	01/13/12	
REV	DESCRIPTION	BY	DATE	ECO NO.