


FEMALE END VIEW




- 1 = BLUE (- VOLTAGE)
 2 = BROWN (+ VOLTAGE)
 3 = BARE (SHIELD)
 4 = GREEN/YELLOW (GROUND)




FOUNDATION™
fieldbus

EXPLODED VIEW

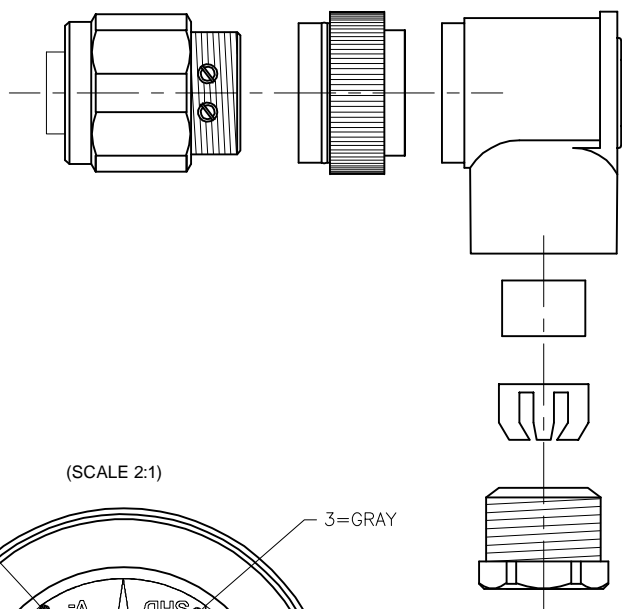

(SCALE 2:1)

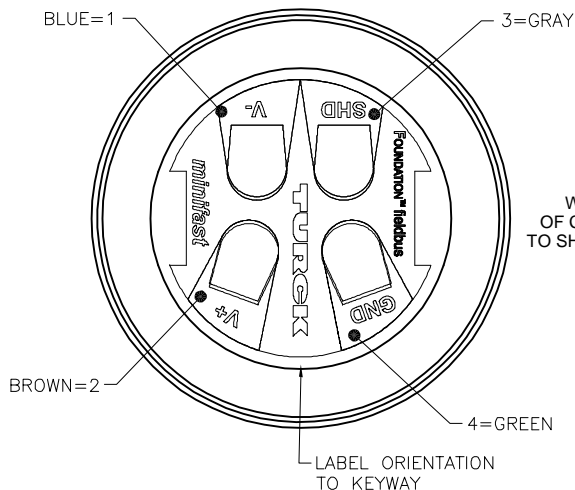

SPECIFICATIONS

HOUSING MATERIAL/COLOR	NYLON or PBT/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
MAXIMUM WIRE SIZE	16 AWG
TERMINATION METHOD	SCREW TERMINAL
CABLE GRIP RANGE	PG11 = 8–10mm
TEMPERATURE RATING	–40°C to +85°C (–40°F to +185°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

KEY-WAY
ADJUSTABLE
BY 45°
INCREMENTS

PG 11

52.5 [2.07]
REF.

7/8–16UN




Ø28.0 [1.10]

PG 11

Ø10.0 [0.39] MAX
CABLE DIAMETER

FIELD WIREABLE MINIFAST RIGHT-ANGLE CONNECTOR

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	KMY	DATE	06/21/12	DESCRIPTION BKV 4240-0/11/FF			
APVD			A.A.	SCALE	1=1.3					
SEE SPECIFICATIONS			CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT				IDENTIFICATION NO. U2-20364		REV B
FINISH				MILLIMETER [INCH]						
SEE SPECIFICATIONS			DO NOT SCALE THIS DRAWING				FILE: U2-20364		SHEET 1 OF 1	