
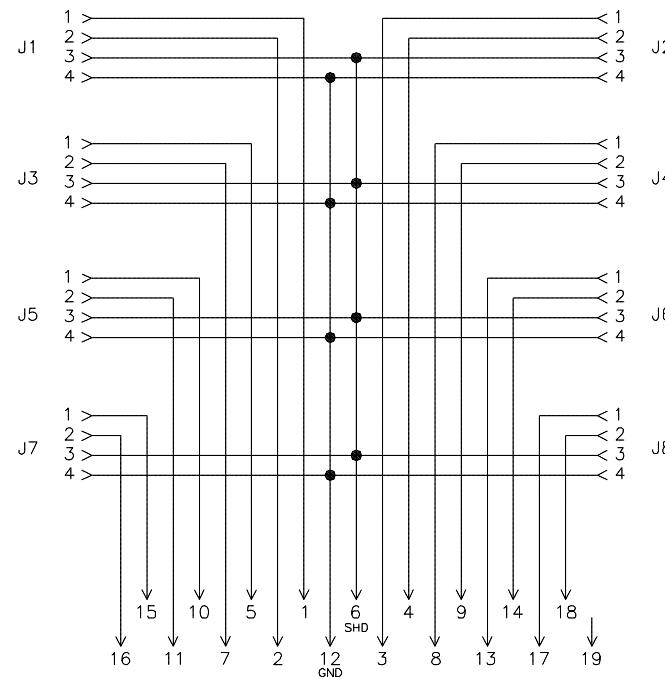
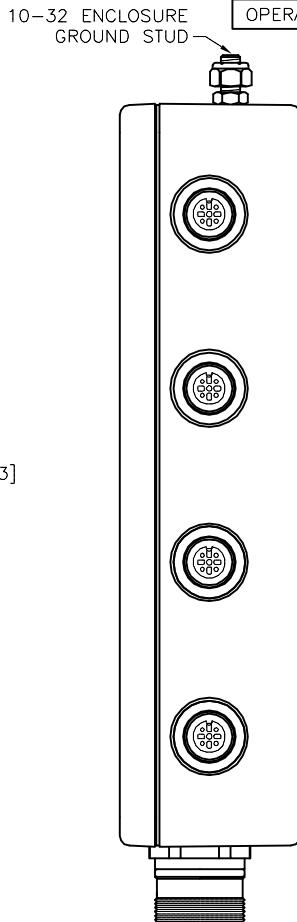


CS19 PIN-OUT (P1)	FEMALE PIN-OUT (J1-J8)																																								
 <table> <tbody> <tr><td>1</td><td>= PORT 1-1</td><td>10</td><td>= PORT 5-1</td></tr> <tr><td>2</td><td>= PORT 1-2</td><td>11</td><td>= PORT 5-2</td></tr> <tr><td>3</td><td>= PORT 2-1</td><td>12</td><td>= GROUND</td></tr> <tr><td>4</td><td>= PORT 2-2</td><td>13</td><td>= PORT 6-1</td></tr> <tr><td>5</td><td>= PORT 3-1</td><td>14</td><td>= PORT 6-2</td></tr> <tr><td>6</td><td>= SHIELD</td><td>15</td><td>= PORT 7-1</td></tr> <tr><td>7</td><td>= PORT 3-2</td><td>16</td><td>= PORT 7-2</td></tr> <tr><td>8</td><td>= PORT 4-1</td><td>17</td><td>= PORT 8-1</td></tr> <tr><td>9</td><td>= PORT 4-2</td><td>18</td><td>= PORT 8-2</td></tr> </tbody> </table>	1	= PORT 1-1	10	= PORT 5-1	2	= PORT 1-2	11	= PORT 5-2	3	= PORT 2-1	12	= GROUND	4	= PORT 2-2	13	= PORT 6-1	5	= PORT 3-1	14	= PORT 6-2	6	= SHIELD	15	= PORT 7-1	7	= PORT 3-2	16	= PORT 7-2	8	= PORT 4-1	17	= PORT 8-1	9	= PORT 4-2	18	= PORT 8-2	 <table> <tbody> <tr><td>4</td></tr> <tr><td>3</td></tr> <tr><td>2</td></tr> <tr><td>1</td></tr> </tbody> </table>	4	3	2	1
1	= PORT 1-1	10	= PORT 5-1																																						
2	= PORT 1-2	11	= PORT 5-2																																						
3	= PORT 2-1	12	= GROUND																																						
4	= PORT 2-2	13	= PORT 6-1																																						
5	= PORT 3-1	14	= PORT 6-2																																						
6	= SHIELD	15	= PORT 7-1																																						
7	= PORT 3-2	16	= PORT 7-2																																						
8	= PORT 4-1	17	= PORT 8-1																																						
9	= PORT 4-2	18	= PORT 8-2																																						
4																																									
3																																									
2																																									
1																																									

SPECIFICATIONS	
HOUSING MATERIAL/FINISH	STAINLESS STEEL/ELECTRO-POLISHED
RECEPTACLE HOUSING MAT'L/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIER MAT'L/COLOR (J1-J8)	NYLON/BLACK
CONTACT CARRIER MAT'L (P1)	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	150 V
OPERATING CURRENT	3.0 A
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +90°C (-40°F to +194°F)

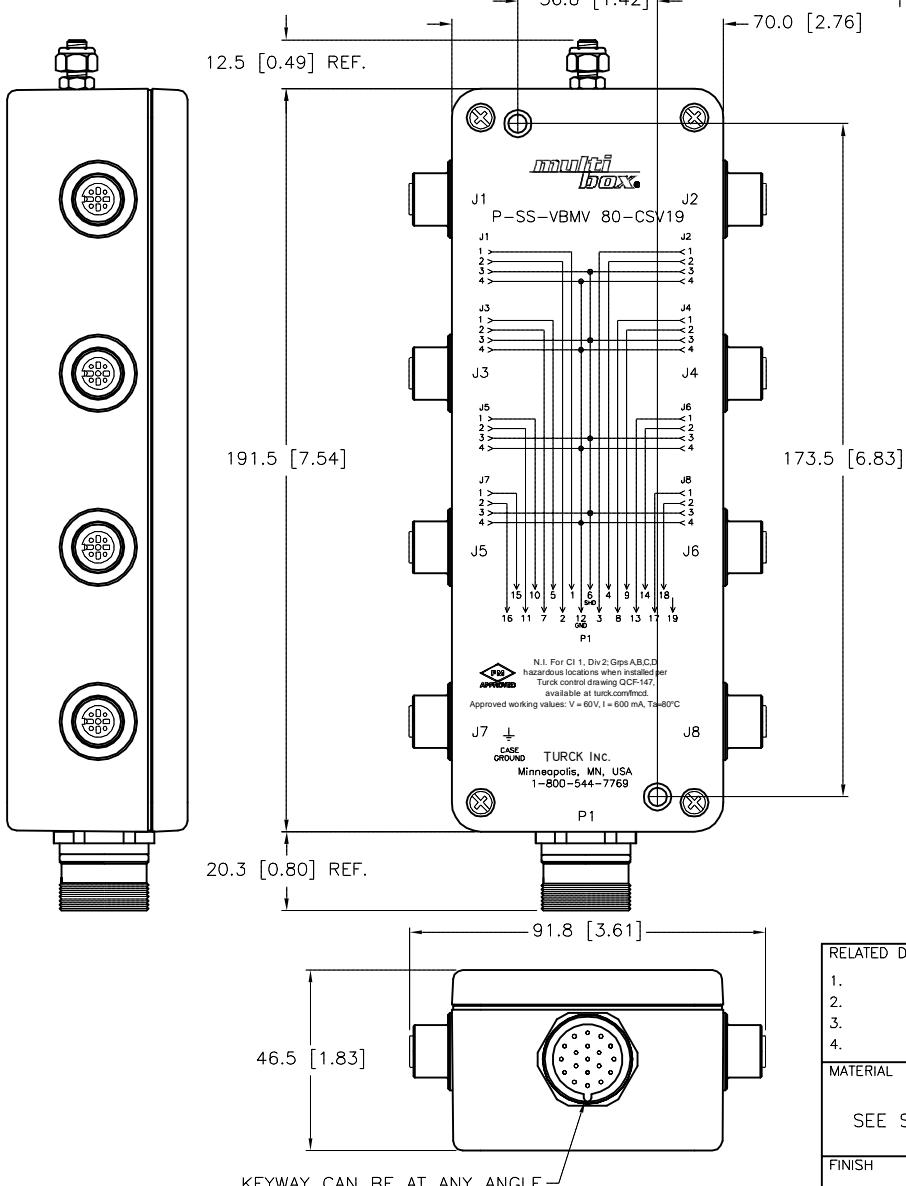

## WIRING DIAGRAM

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	<b>TURCK INC</b> High Technology Sensors and Automation Controls	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
1.	2.	3.	4.		
MATERIAL  SEE SPECIFICATIONS		DRFT KMY  APVD J.S.	DATE 06/26/12  SCALE 1=2.0	DESCRIPTION  P-SS-VBMV 80-CSV19	
FINISH  SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY  CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT  <b>MILLIMETER [ INCH ]</b>	IDENTIFICATION NO.  U2-20512
				REV  C	
				FILE: U2-20512	SHEET 1 OF 1