

MALE END VIEW

power fast

FEMALE END VIEW

power fast

CONTACT CARRIER MATERIAL

PVC

MOLDED MATERIAL/COLOR

PVC/BLACK

CONTACT MATERIAL/PLATING

BRASS or COPPER/GOLD

COUPLING NUT MATERIAL/PLATING

BRASS/NICKEL

RATED CURRENT [A]

40.0 A

RATED VOLTAGE [V]


600 V

TEMPERATURE RATING

-40°C to +90°C (-40°F to +194°F)


PROTECTION CLASS

MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

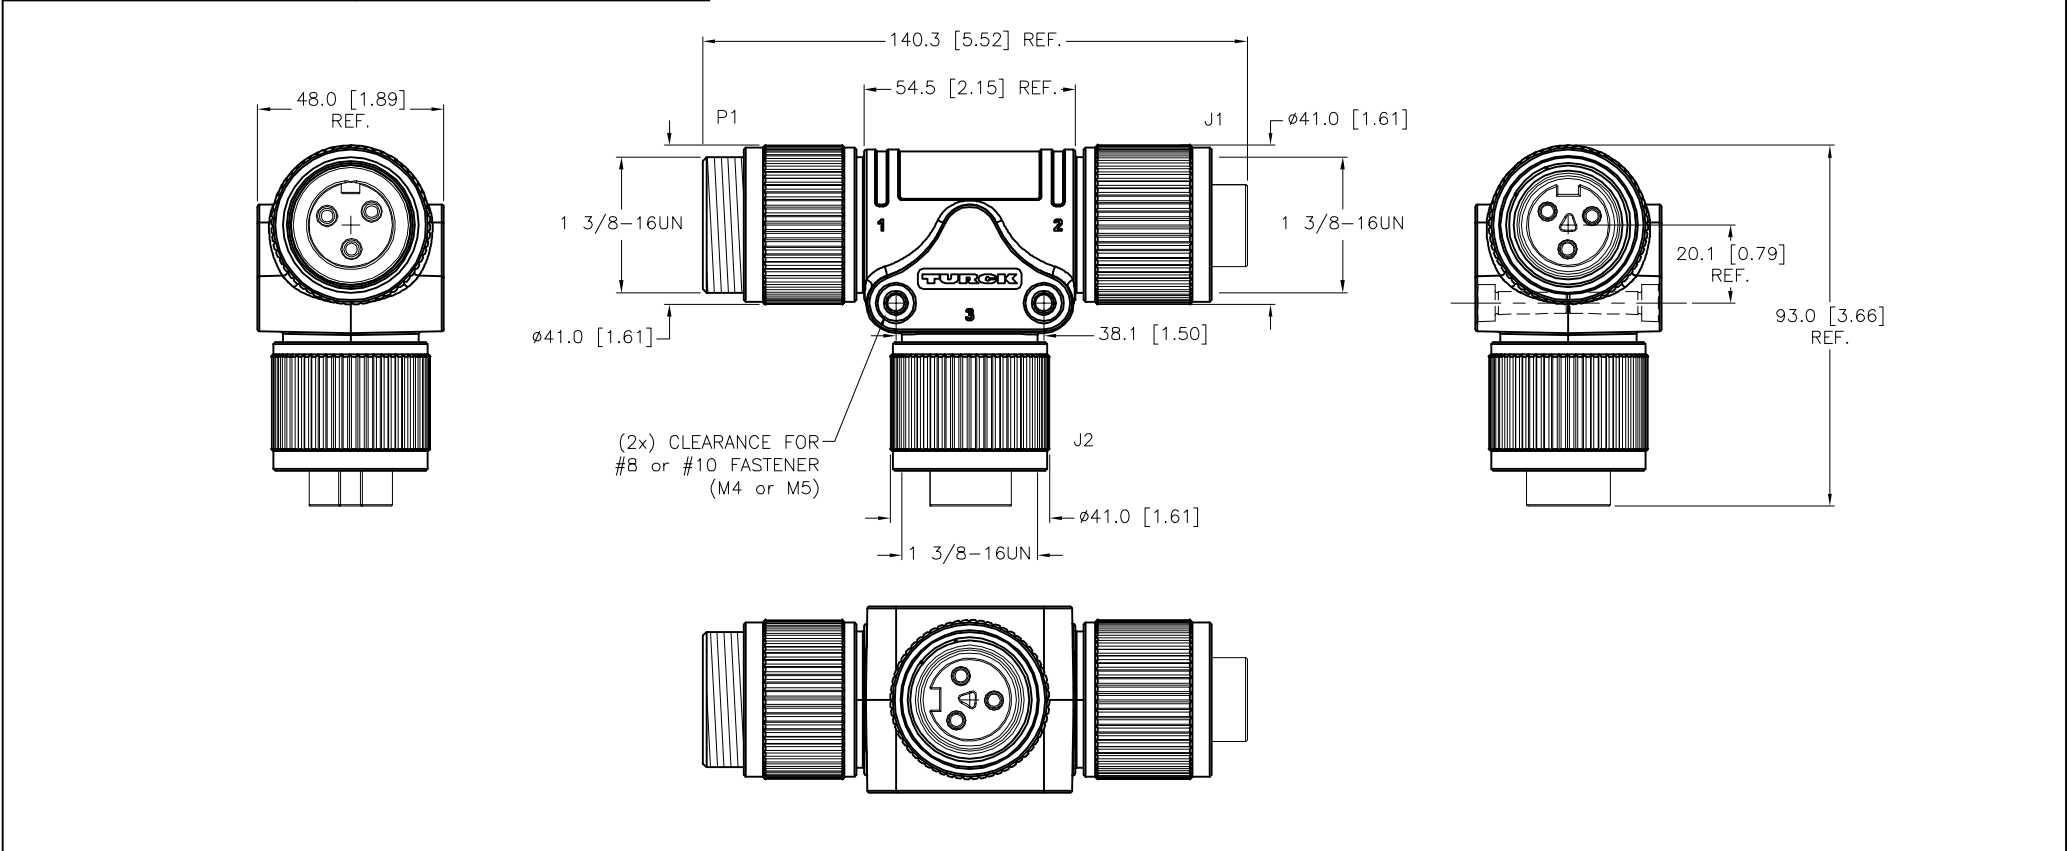

SOURCE DRAWING - FOR REFERENCE ONLY

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

 CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
					1. 2. 3. 4.							
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY					
					FINISH		CONTACT TURCK FOR MORE INFORMATION					
SEE SPECIFICATIONS				DRFT KMY		DATE 04/30/13		DESCRIPTION P-PWR-GSDM/2GKDM 30				
				APVD M.B.		SCALE 1=2.0						
						UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-20587		REV E		
				SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING		FILE: U2-20587		
										SHEET 1 OF 1		
E	UPDATE RATED VOLTAGE AND CURRENT			RDS	01/18/21	500000002372						
REV	DESCRIPTION			BY	DATE	ECO NO.						