
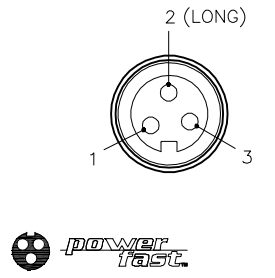
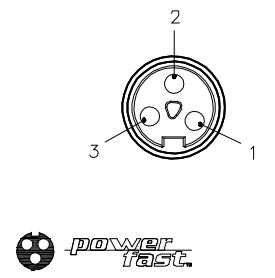
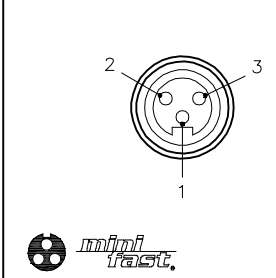
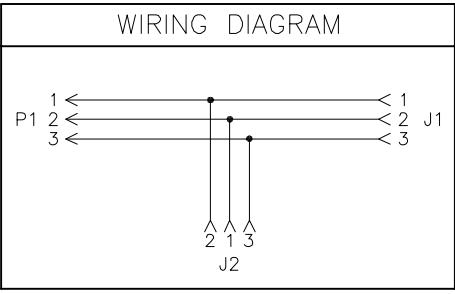
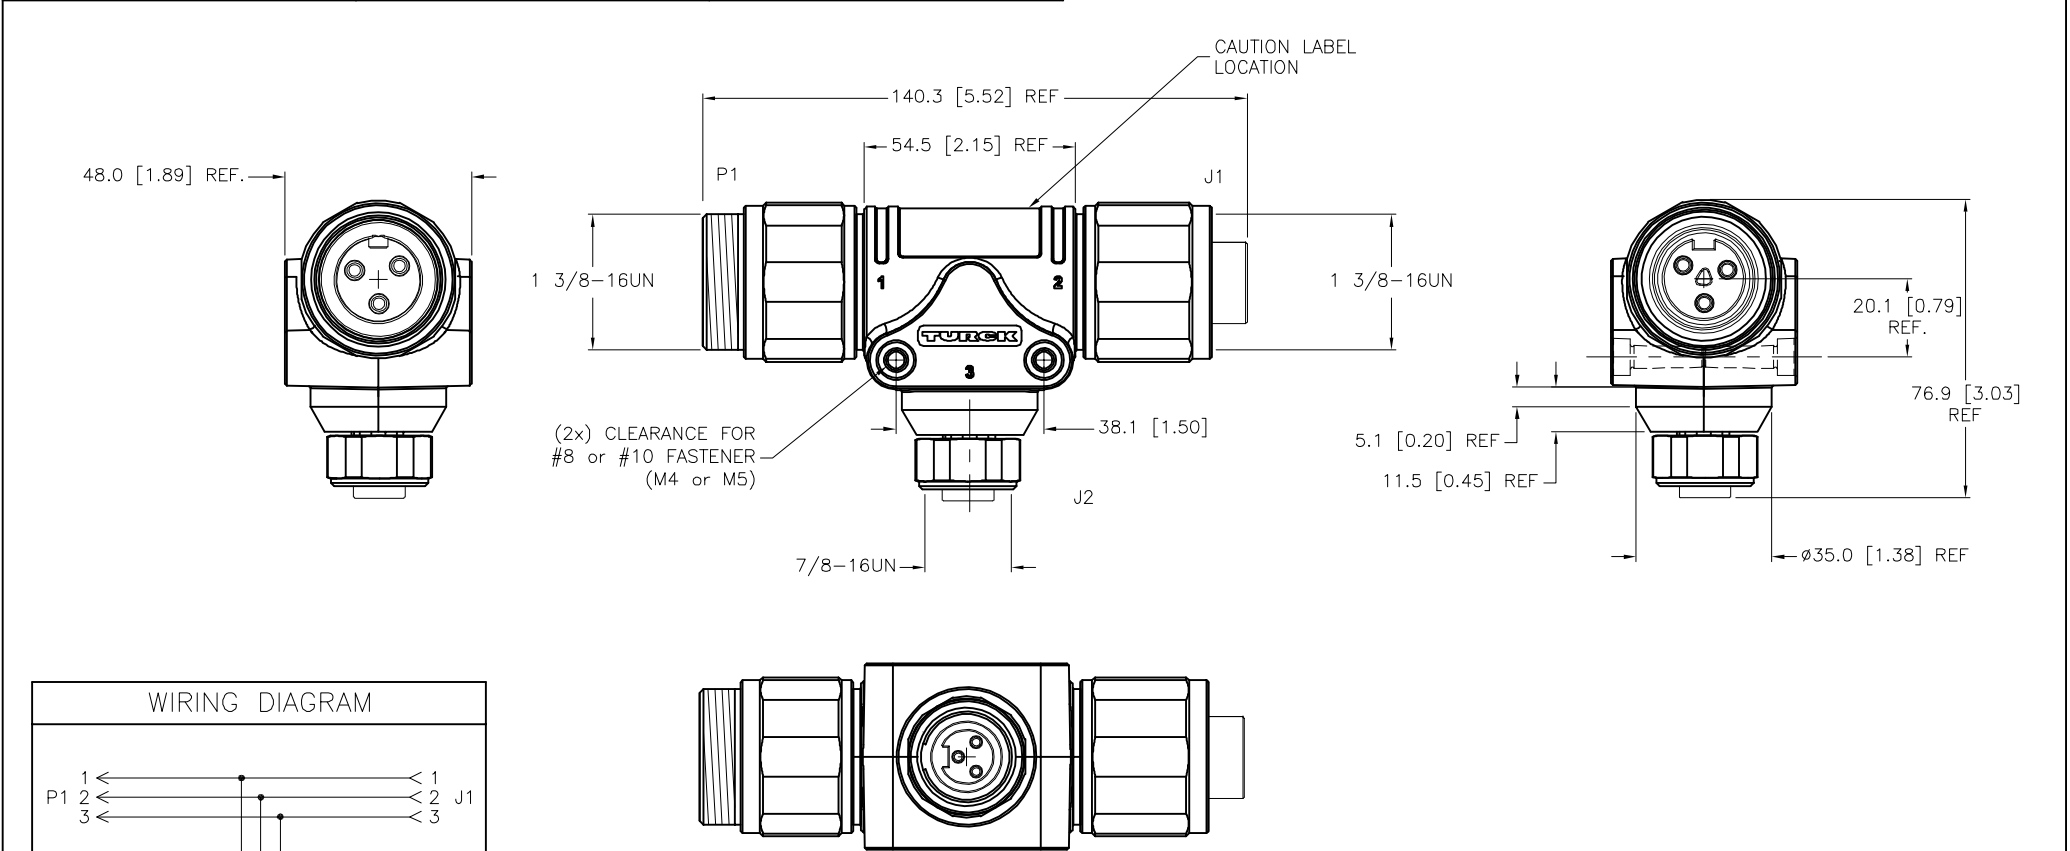



MALE END VIEW	FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	PVC
			MOLDED MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	40.0 A COMBINED/21.0 A DROP
			RATED VOLTAGE [V]	600 V
			TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
			APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238



CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

<div>2 1 3 J2</div>					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
					1. 2. 3. 4.											
<div><div></div><div>CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD</div></div>					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT KMY		DATE 04/30/13		DESCRIPTION P-PWR-GSDV/GKDV/RKV 34			
					SEE SPECIFICATIONS				APVD M.B.		SCALE 1=2.0					
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U2-20592		REV F	
					SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING				FILE: U2-20592		SHEET 1 OF 1	
F	UPDATE RATED CURRENT				NF	01/18/21	500000002372									
REV	DESCRIPTION				BY	DATE	ECO NO.									