
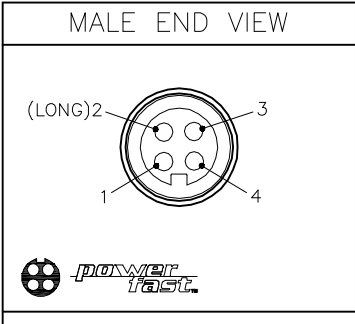
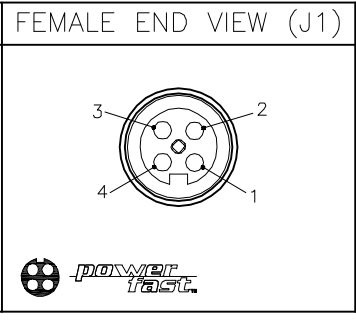
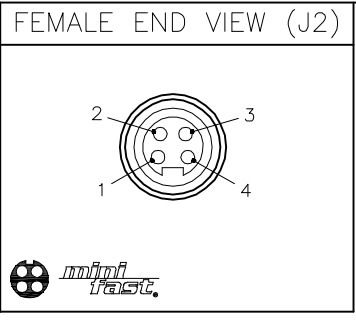
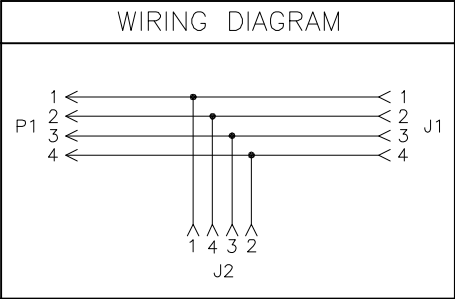


MALE END VIEW	FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	PVC
			MOLDED MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	35.0 A COMBINED/18.0 A DROP
			RATED VOLTAGE [V]	600 V
			TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
			APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238

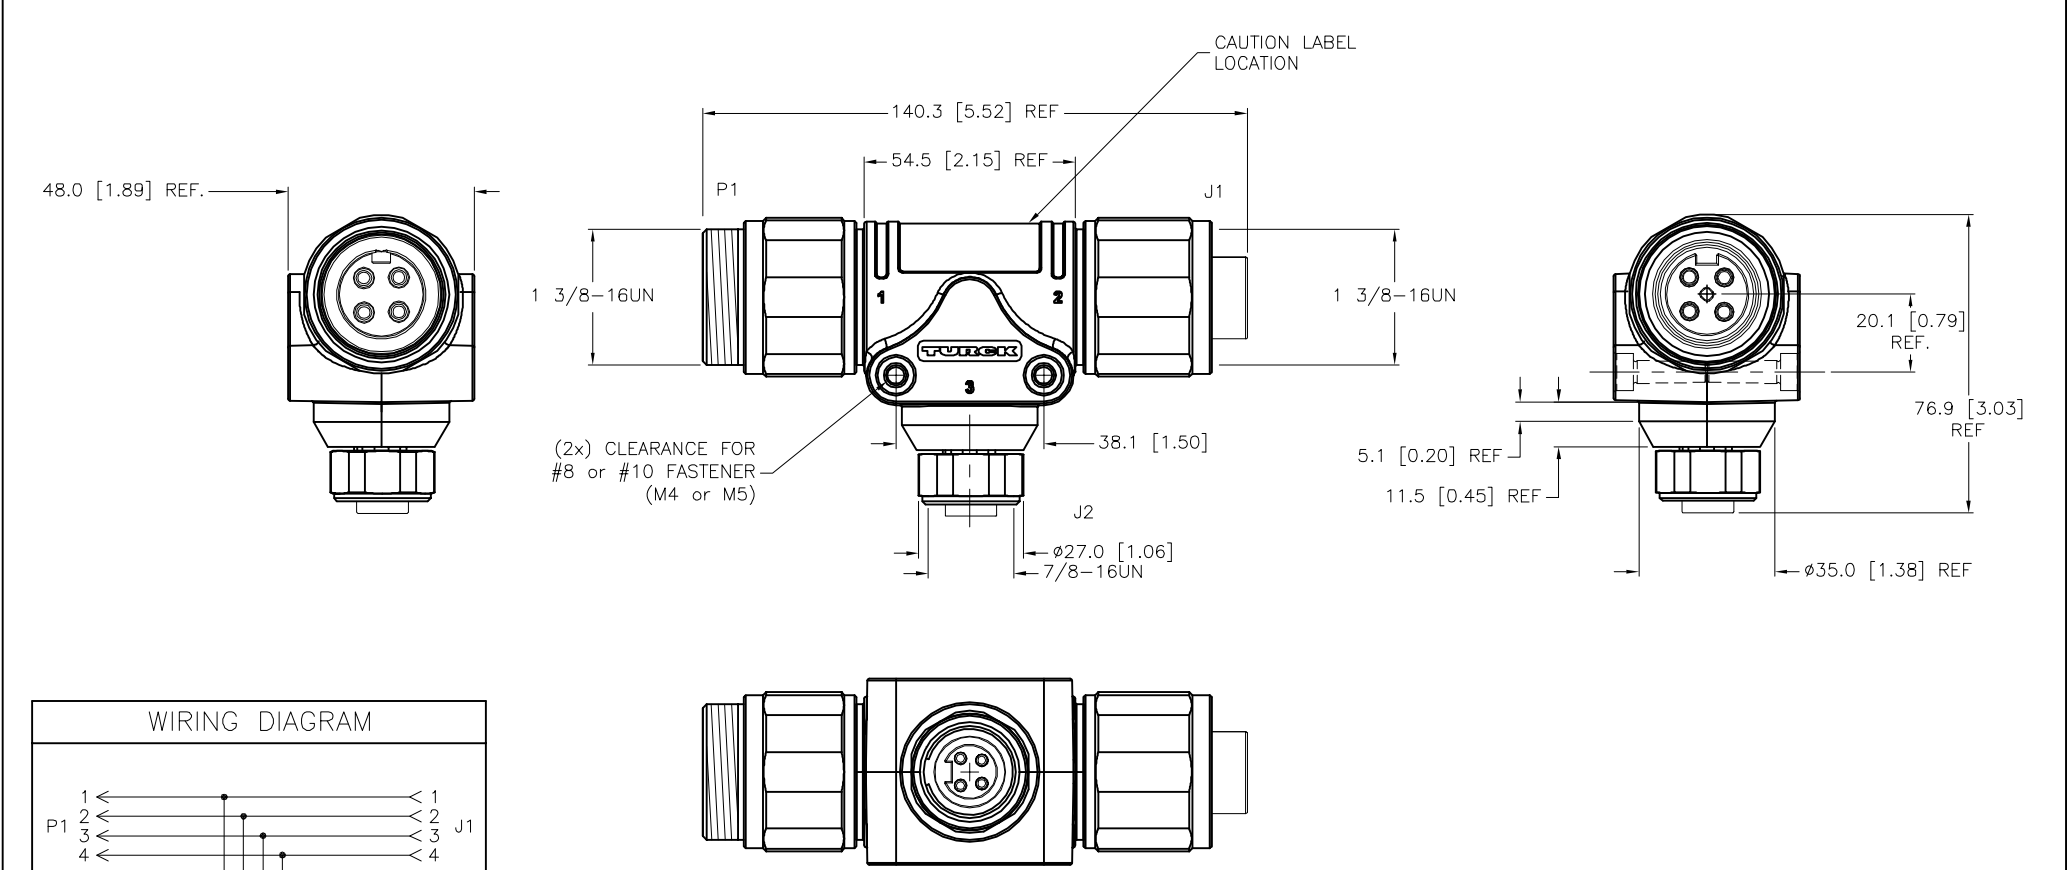

 **CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

1 4 3 2 J2					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us 	
 CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD					MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT KMY DATE 04/30/13		DESCRIPTION P-PWR-GSDV/GKDV/RKV 44	
					FINISH SEE SPECIFICATIONS				APVD M.B. SCALE 1=2.0			
							UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-20593		REV F	
							DO NOT SCALE THIS DRAWING		FILE: U2-20593		SHEET 1 OF 1	
F	UPDATE RATED VOLTAGE AND CURRENT			RDS	01/18/21	500000002372						
REV	DESCRIPTION			BY	DATE	ECO NO.						