




MALE END VIEW (P1)



FEMALE END VIEW (J1)



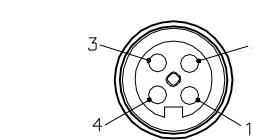


FEMALE END VIEW (J2)

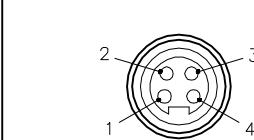

SPECIFICATIONS

CONTACT CARRIER MATERIAL	PVC
MOLDED MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/FINISH (P1,J1)	ALUMINUM/CLEAR-ANODIZED
COUPLING NUT MATERIAL/PLATING (J2)	BRASS/NICKEL
RATED CURRENT [A]	35.0 A COMBINED/18.0 A DROP
RATED VOLTAGE [V]	600 V
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238

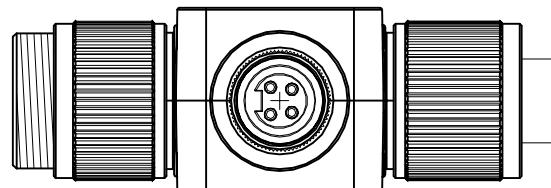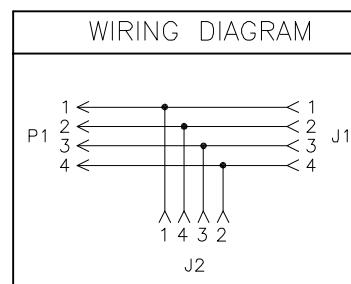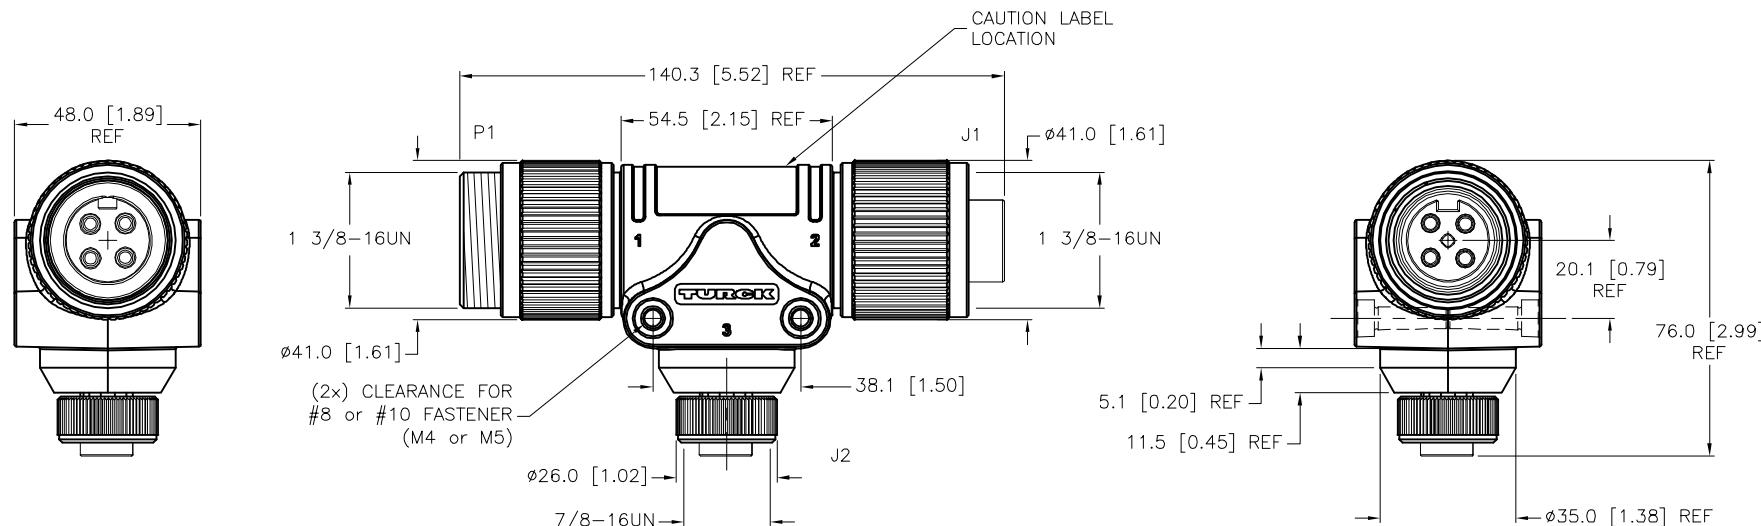

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
	1.				DRFT	KMY		
	2.				APVD	M.B.		
	3.				DATE	04/30/13		
	4.				SCALE	1=2.0		
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT	DESCRIPTION				
SEE SPECIFICATIONS				P-PWR-GSDA/GKDA/RKM 44				
FINISH				IDENTIFICATION NO.				
SEE SPECIFICATIONS				U2-20596				
F	UPDATE RATED VOLTAGE AND CURRENT	RDS	01/18/21	500000002372	REV	F		
REV	DESCRIPTION	BY	DATE	ECO NO.	FILE:	U2-20596		
					SHEET	1 OF 1		



CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD