

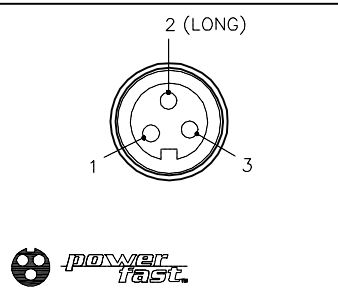
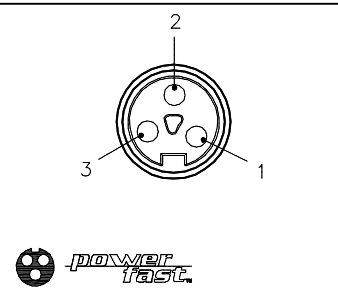
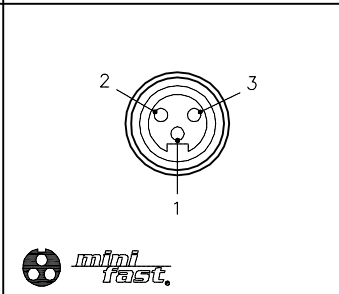


MALE END VIEW (P1)	FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	PVC
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	30.0 A COMBINED/15.0 A DROP
			RATED VOLTAGE [V]	600 VAC
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
			APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238



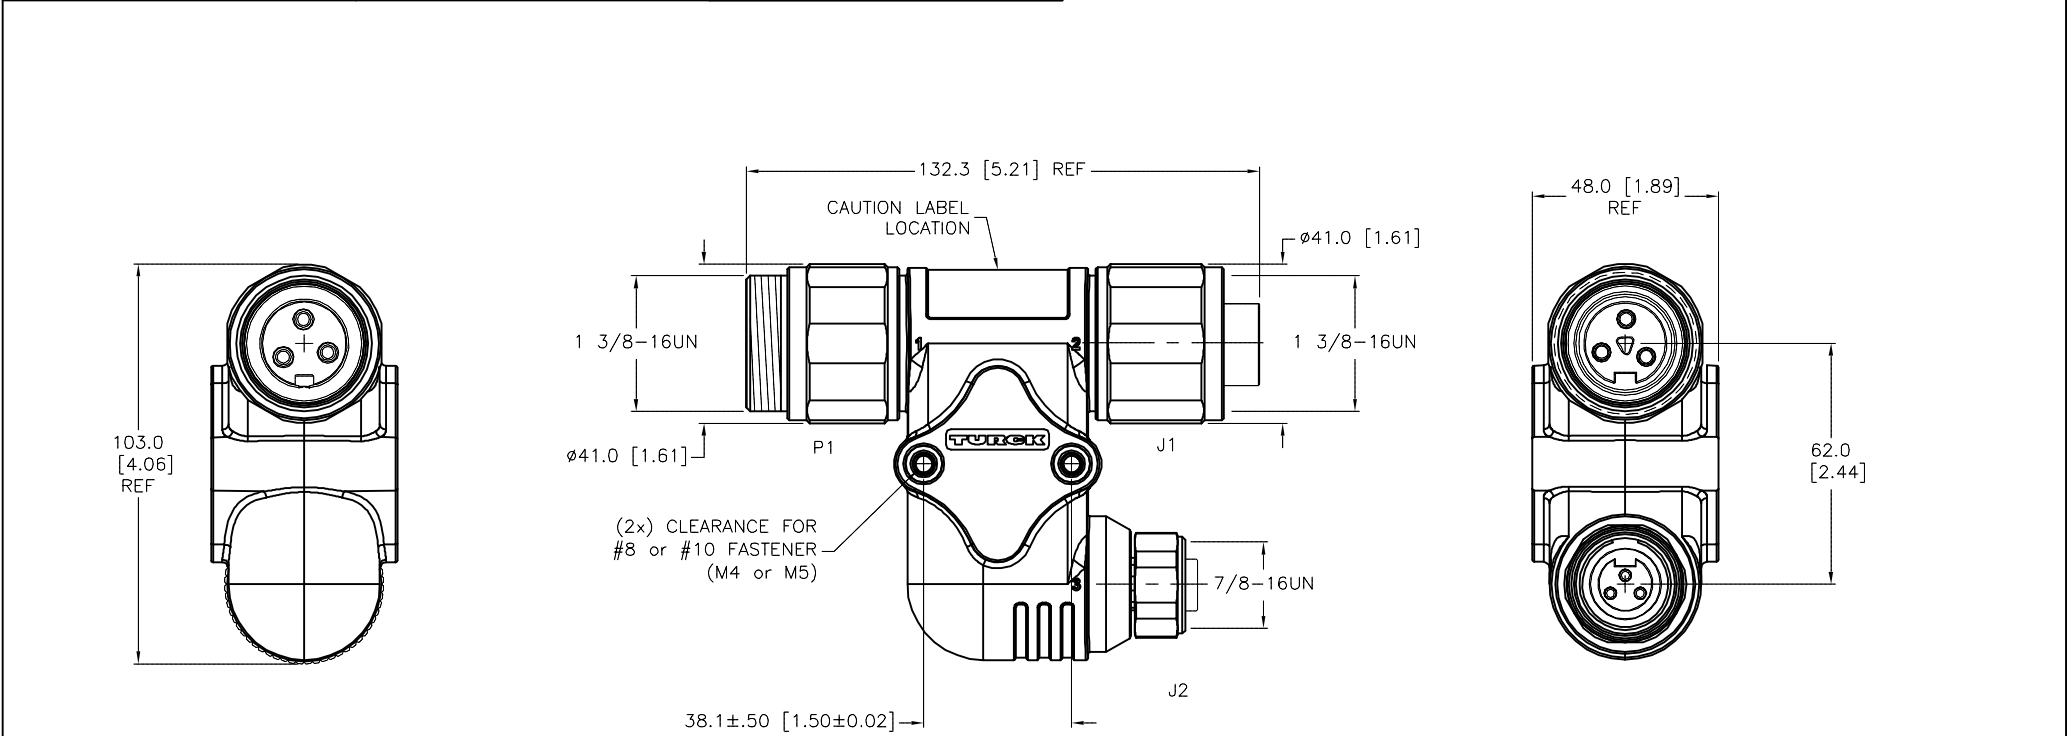



WIRING DIAGRAM

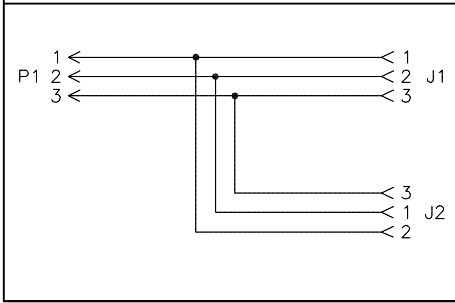

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

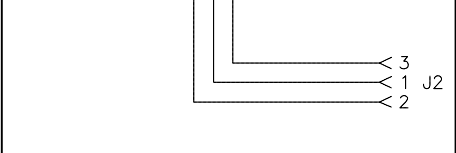					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
					1.							
					2.							
					3.							
					4.							
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		KMY	DATE	05/01/13	DESCRIPTION P-PWR-SH-GSDV/GKDV/RKV 34			
SEE SPECIFICATIONS				APVD		M.B.	SCALE	1=2.0				
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV		
SEE SPECIFICATIONS				MILLIMETER [INCH]				U2-20603		E		
DO NOT SCALE THIS DRAWING		FILE: U2-20603				SHEET 1 OF 1						

E	UPDATE RATED CURRENT LEVEL	RDS	01/16/20	75562
REV	DESCRIPTION	BY	DATE	ECO NO.