



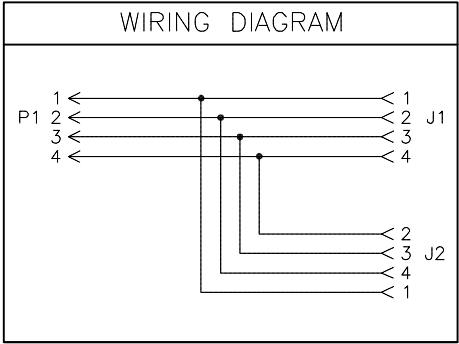
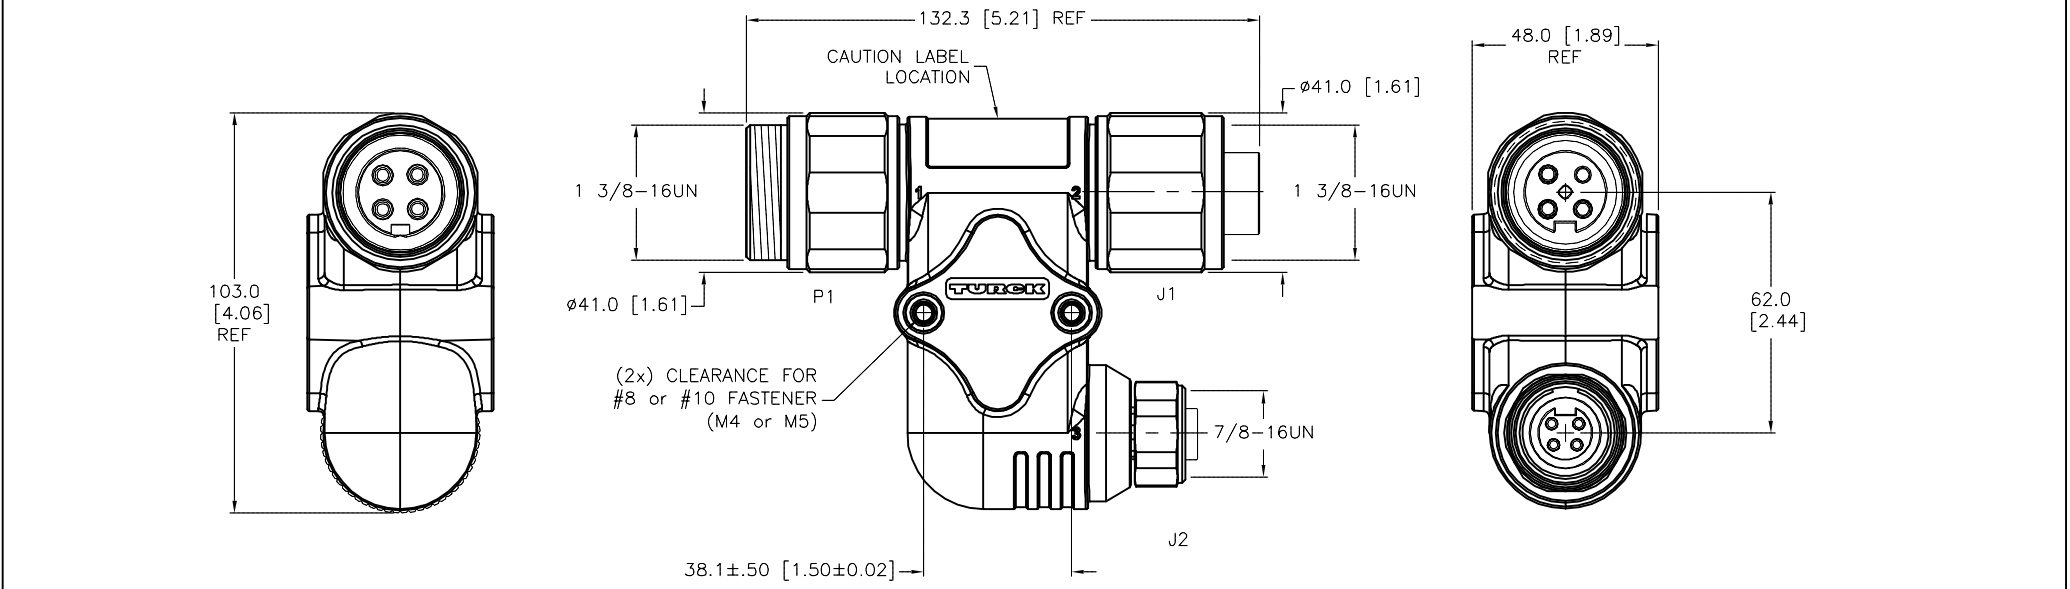


MALE END VIEW (P1)	FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	PVC
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	25.0 A COMBINED/15.0 A DROP
			RATED VOLTAGE [V]	600 VAC
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
			APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238



CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT KMY		DATE 05/01/13	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD M.B.		SCALE 1=2.0	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING		MILLIMETER [INCH]		P-PWR-SH-GSDV/GKDV/RKV 44	
SEE SPECIFICATIONS								IDENTIFICATION NO.	
								U2-20604	
								REV	
								E	
E UPDATE RATED CURRENT LEVEL				RDS 01/16/20		75561			
REV DESCRIPTION				BY DATE		ECO NO.		FILE: U2-20604	
								SHEET 1 OF 1	