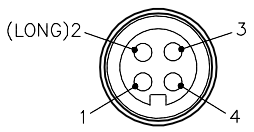

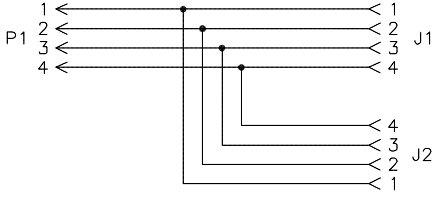
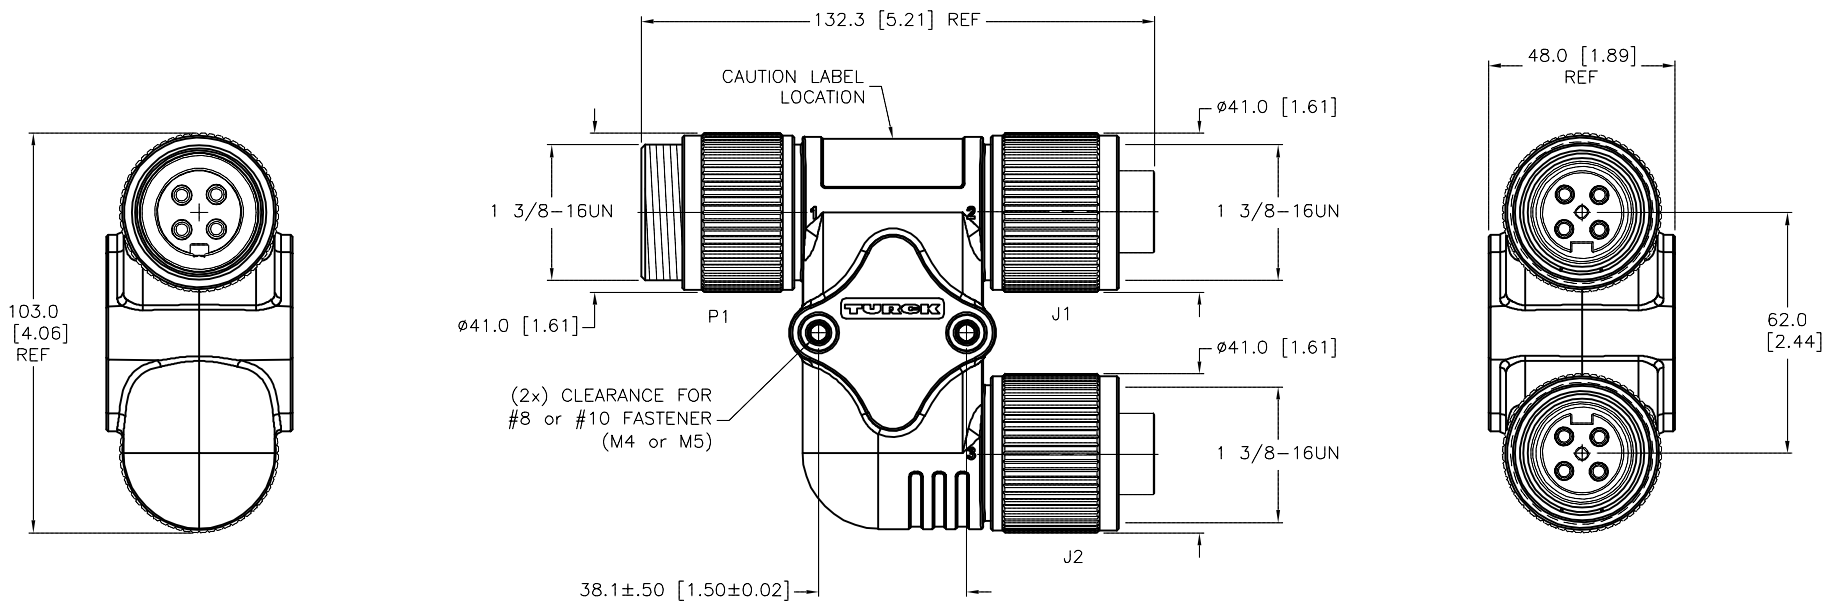




MALE END VIEW (P1)	FEMALE END VIEW (J1,J2)	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	PVC
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	ALUMINUM/CLEAR-ANODIZED
			RATED CURRENT [A]	25 A
			RATED VOLTAGE [V]	600 VAC
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K



SOURCE DRAWING - FOR REFERENCE ONLY

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

<div><div><div><div>CAUTION:</div><div>RISK OF ELECTRICAL SHOCK</div><div>DO NOT DISCONNECT UNDER LOAD</div></div></div></div>					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
					1.				TURCK			
					2.							
					3.							
4.		MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT KMY		DATE 04/30/13		DESCRIPTION P-PWR-SH-GSDA/2GKDA 40		
SEE SPECIFICATIONS		FINISH		CONTACT TURCK FOR MORE INFORMATION		APVD M.B.		SCALE 1=2.0				
SEE SPECIFICATIONS		UNIT OF MEASUREMENT		MILLIMETER [INCH]		IDENTIFICATION NO.		REV				
DO NOT SCALE THIS DRAWING		DO NOT SCALE THIS DRAWING		FILE: U2-20606		U2-20606		C				
C	UPDATED CURRENT RATING	ER	01/16/20	75560	SHEET 1 OF 1							
REV	DESCRIPTION	BY	DATE	ECO NO.								