





SPECIFICATIONS		
CONTACT CARRIER MATERIAL	PVC	
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK	
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD	
COUPLING NUT MATERIAL/FINISH (P1,J1)	ALUMINUM/CLEAR-ANODIZED	
COUPLING NUT MATERIAL/PLATING (J2)	BRASS/NICKEL	
RATED CURRENT [A]	30.0 A COMBINED/15.0 A DROP	
RATED VOLTAGE [V]	600 VAC	
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)	
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238	

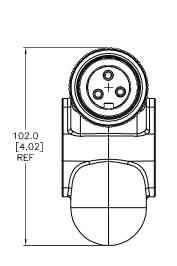

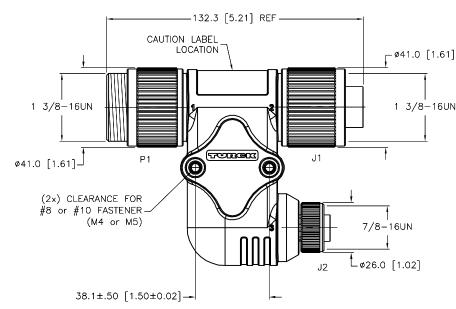

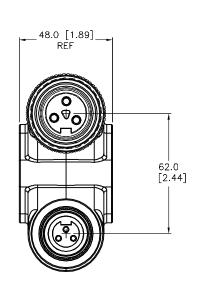



CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD

Е	UPDATE RATED CURRENT LEVEL	RDS	01/16/20	75562
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 3RD ANGLE PROJECTION 2. 3. MATERIAL ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY SEE SPECIFICATIONS FINISH CONTACT TURCK FOR MORE INFORMATION

SEE SPECIFICATIONS

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DATE 05/01/13 DESCRIPTION KMY APVD 1=2.0

UNIT OF MEASUREMENT

MILLIMETED [INCL]

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax

www.turck.us

P-PWR-SH-GSDA/GKDA/RKM 34

SOURCE DRAWING - FOR REFERENCE ONLY

IDENTIFICATION NO.

ζ		U2-20607			Ł
	DO NOT SCALE THIS DRAWING	FILE: U2-20607	SHEET	1	OF