



FEMALE END VIEW (J2)




SPECIFICATIONS

CONTACT CARRIER MATERIAL	PVC
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	35 A COMBINED, 18 A DROP
RATED VOLTAGE [V]	600 V
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238

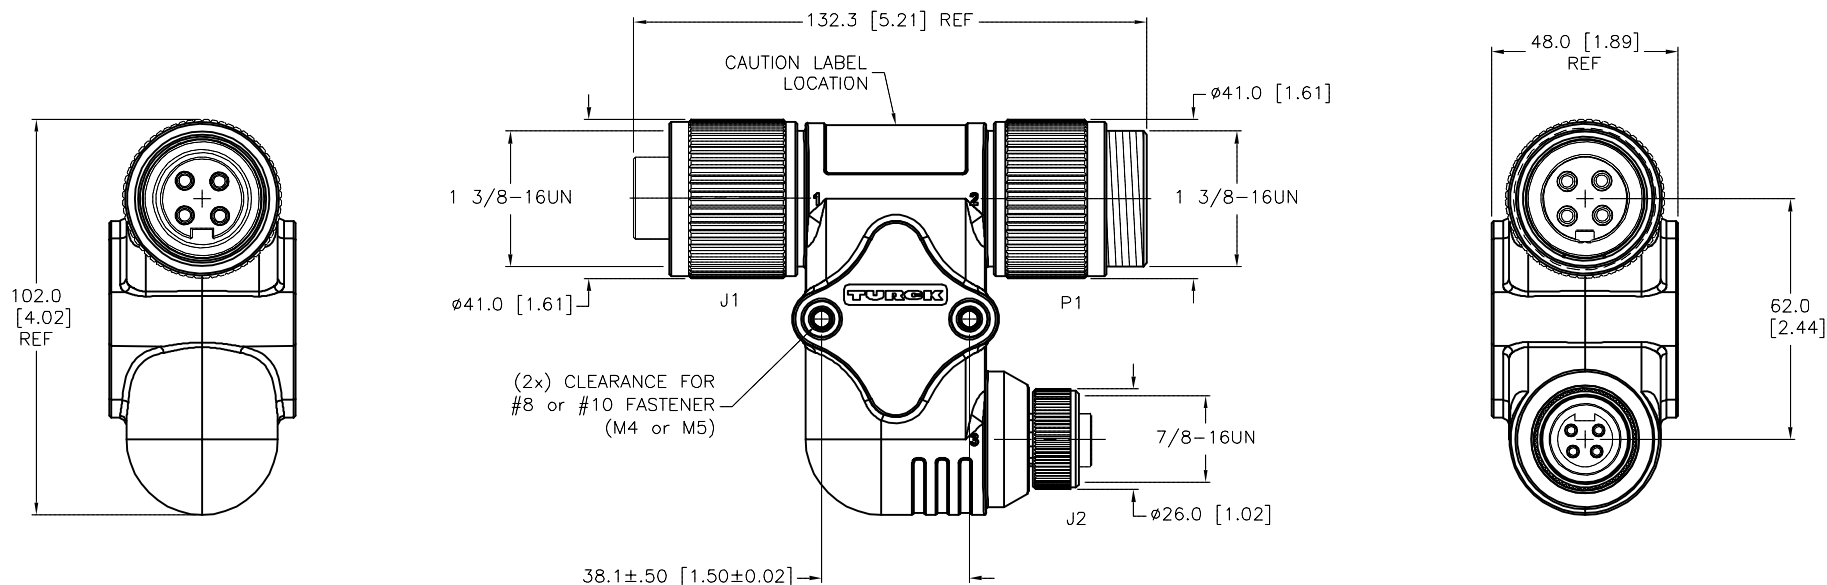


WIRING DIAGRAM

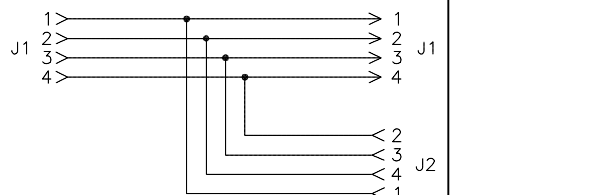

CAUTION:

**⚠ RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD**

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	RDS	DATE	09/12/12	DESCRIPTION SH-GKDM/GSDM/RKM 44		
APVD		M.B.	SCALE	1=2.0				
SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U2-20831		REV D
FINISH		DO NOT SCALE THIS DRAWING						
SEE SPECIFICATIONS		FILE: U2-20831				SHEET 1 OF		

D	UPDATE RATED CURRENT	NF	04/26/19	69357
REV	DESCRIPTION	BY	DATE	ECO NO.