



SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING AND NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	60 V
TEMPERATURE RANGE	-25°C to +85°C (-13°F to +185°F)
PROTECTION CLASS	MEETS IEC IP67



END VIEW  
LOCK NUT NOT SHOWN  
FOR CLARITY

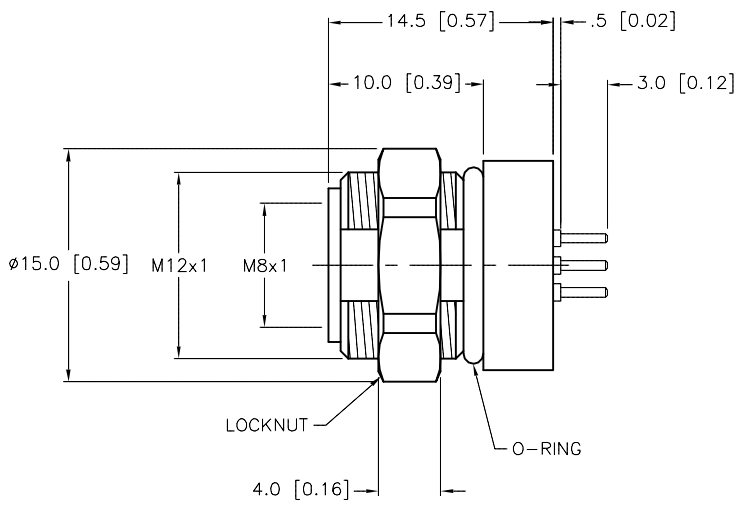

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:  
1. "/S3212" DESIGNATES BULK PACKED 20 PER TRAY, WITH LOCKNUT. TOTAL OF 400 PER BOX.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				DRFT KMY		DATE 10/10/12	
MATERIAL  SEE SPECIFICATIONS				APVD T.K.		SCALE 1=.5	
FINISH  SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY  CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT <b>MILLIMETER [ INCH ]</b>		DESCRIPTION MFKS 3F-PCBF/S3212	
A REV				DRAWING RELEASE DESCRIPTION		IDENTIFICATION NO. U2-20938	
BY KMY		DATE 10/12/12		DO NOT SCALE THIS DRAWING		FILE: U2-20938	
ECO NO.						SHEET 1 OF 1	