







MALE END VIEW	FEMALE END VIEW	PANEL CUT-OUT	WIRING DIAGRAM	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON OR TPU
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				HOUSING MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	150 V
				TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
				GASKET MATERIAL	NITRILE
				ISOLATOR MATERIAL	NYLON

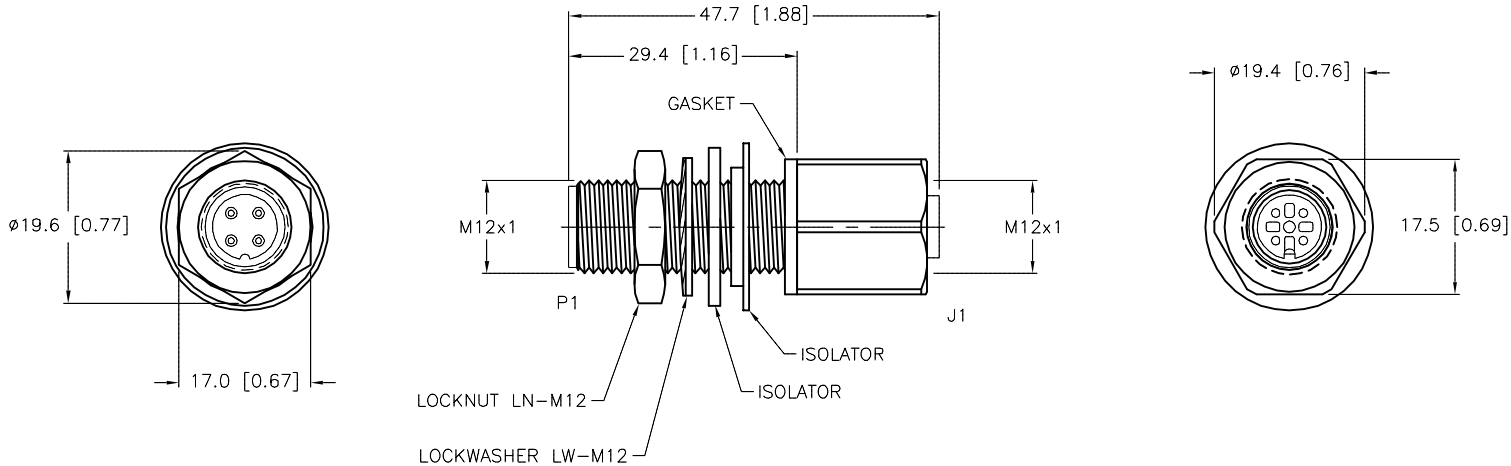

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- "/S3004" DESIGNATES BULK PACKED, NO FLAG/WRAP LABEL, NO BAG.
 - CONNECTOR KEYWAY POSITIONS ARE REFERENCE ONLY. KEYWAYS MAY BE IN ANY POSITION.

B	ADD KEYWAY NOTE	NF	06/15/15	49971
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	10/18/12	DESCRIPTION FK FS 4.4/M12/S3004
FINISH SEE SPECIFICATIONS	APVD		J.S.	SCALE	1 = 1.0		
	UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U2-20958	REV B	
	DO NOT SCALE THIS DRAWING				FILE: U2-20958	SHEET 1 OF 1	