

MALE END	VIEW
4 600	2
mini fast.	

_						
	SPECIFICATIONS					
	HOUSING MATERIAL/COLOR	GLASS FILLED NYLON/BLACK				
	CONTACT MATERIAL/PLATING	BRASS/GOLD				
	COUPLING NUT MATERIAL	STAINLESS STEEL				
	RATED CURRENT [A]	9.0 A				
	RATED VOLTAGE [V]	600 V				
	MAXIMUM WIRE SIZE	16 AWG				
	TERMINATION METHOD	SCREW TERMINAL				
	TEMPERATURE RATING	-25°C to +85°C (-13°F to +185°F)				
	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP 67				
	CABLE GRIP RANGE	PG 9 = 6-8mm				



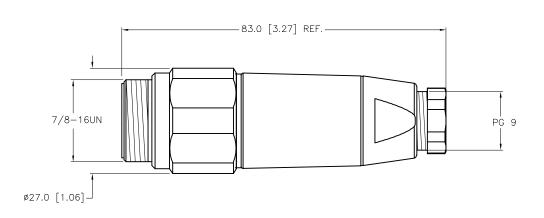

SOURCE DRAWING - FOR REFERENCE ONLY

			RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	ECTION CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WINTHOUT WRITTEN PERMISSION IS PROHIBITED.		CAMPUS DRIVE RPOLIS, MN 55441 800-544-7769 83) 553-7300 83) 553-0708 fax www.turck.us	
			MATERIAL	ALL DIMENSIONS	DRFT RDS DATE 05/23/13 DESCRIPTION BSV 4151-		DESCRIPTION BSV 4151-0/	9
UPDATE TEMPERATURE RATING NF 04/02/24 79995		SEE SPECIFICATIONS FINISH	DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO. REV		
		SEE SPECIFCATIONS	CONTACT TURCK FOR MORE INFORMATION		ER [INCH]	U2-21651		
DESCRIPTION	BY DATE	ECO NO.	1		DO NOT SCALE	THIS DRAWING	FILE: U2-21651	SHEET 1 OF 1