



MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS				
			CONTACT CARRIER MATERIAL	TPU			
	31	RSM 1 (MOLDED HEAD MATERIAL/COLOR	TPU/BLACK			
			CONTACT MATERIAL/PLATING	BRASS/GOLD			
		$\begin{array}{c} 3 \\ 4 \\ \hline \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\$	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
			RATED CURRENT [A]	9.0 A			
			RATED VOLTAGE [V]	250 V			
	fast.		TEMPERATURE RATING	-40°C TO +80°C (-40°F TO +176°F)			
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67			



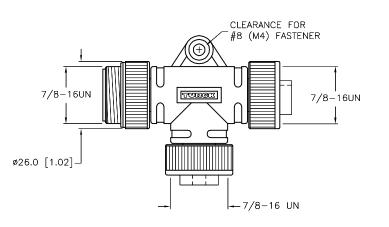





SOURCE DRAWING - FOR REFERENCE ONLY

	RELATED DOCUMENTS 1. 2. 3. 4.	♠1	CONFIDE PROPER INC. U DOCUM WRITTEN	DRAWING IS NTIAL AND THE RTY OF TURCK JSE OF THIS IENT WITHOUT PERMISSION IS YOHIBITED.	High Technology	3000 CAMPUS DRIVE RCK Incc y Sensors and Automation Controls (763) 553-7300 (763) 553-0708 fax turck.com				55441 69 00			
				MATERIAL		DRFT	KMY	DATE 06/04/13	DESCRIPTION		40/5771		
ES BLACK MOLD BODY.				SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	T.S.	SCALE 1=1.5	K2M-ZKKM	-2RKM 40/S771			
					DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION				REV	
				FINISH	CONTACT TURCK	MILLIMETER [INCH]		U2-21691				A	
	KMY	06/20/13		SEE SPECIFICATIONS	FOR MORE INFORMATION								7 \
	BY	DATE	ECO NO.			D	DO NOT SCALE THIS DRAWING		FILE: U2-21691			SHEET 1	1 OF 1

NOTES:

DRAWING RELEASE

А

REV DESCRIPTION

1. "/S771" DESIGNATES BLACK MOLD BODY.