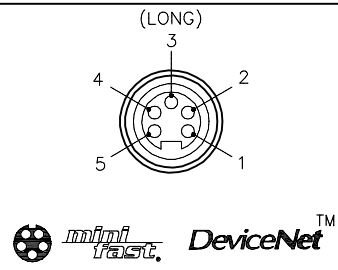
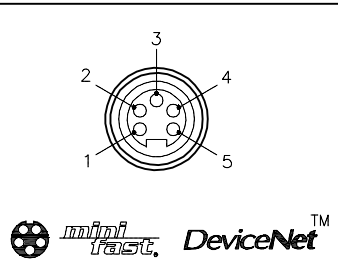
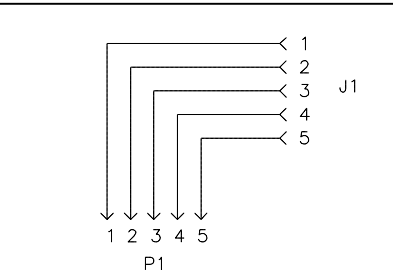
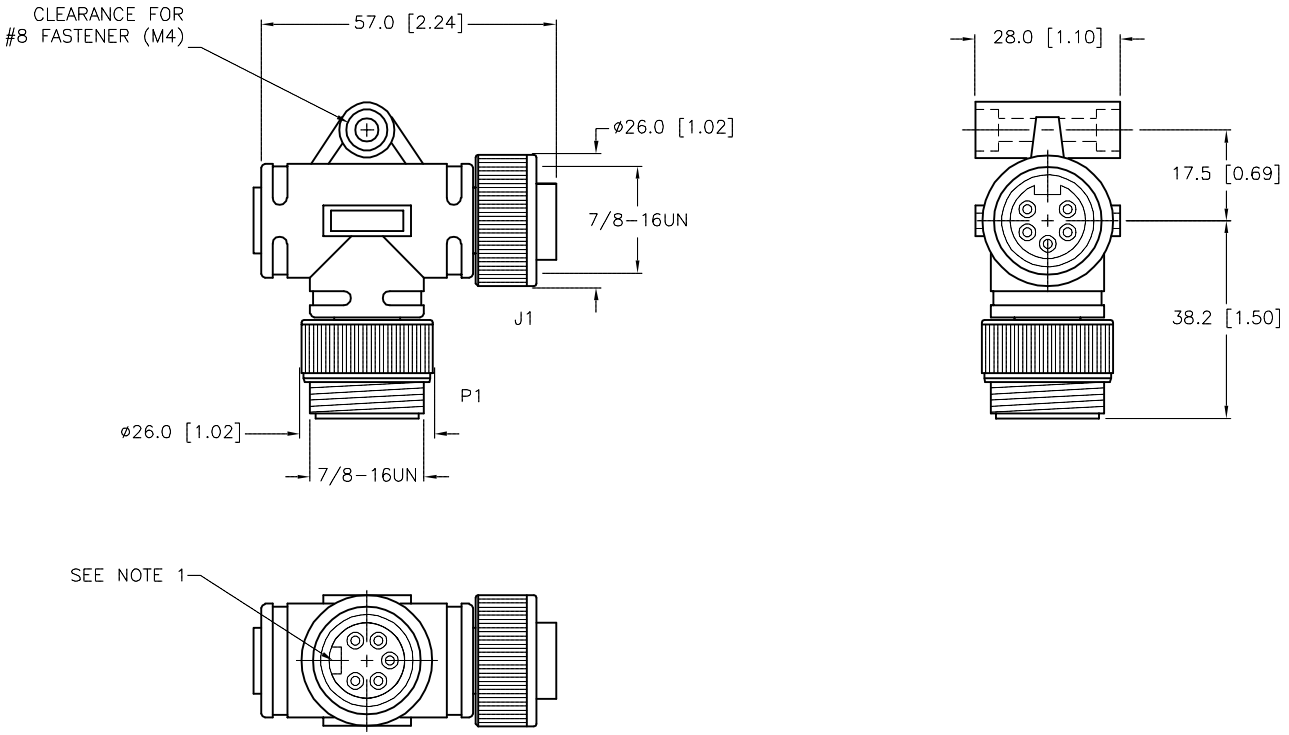




MALE END VIEW	FEMALE END VIEW	WIRING SCHEMATIC	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/BLE-GRAY
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	9.0 A
			RATED VOLTAGE [V]	250 V
			TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. "KM" DESIGNATES SPECIAL KEYWAY ORIENTATION ON DROP CONNECTOR.

NOTES: 1. "KM" DESIGNATES SPECIAL KEYWAY ORIENTATION ON DROP CONNECTOR.	RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>			
	MATERIAL						DRFT	RDS	DATE	06/10/13	DESCRIPTION WSM RKM 57-KM	
							APVD	J.B.	SCALE	1=1.5		
	FINISH				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
MILLIMETER [INCH]							U2-21716		B			
						DO NOT SCALE THIS DRAWING				FILE: U2-21716		SHEET 1 OF 1
B	UPDATE RATED VOLTAGE			NF	08/02/17	61408						
REV	DESCRIPTION			BY	DATE	ECO NO.						