


FEMALE END VIEW




1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK
5 = N/C



SPECIFICATIONS


CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	250 VAC/VDC
OUTER JACKET MATERIAL/COLOR	TPU/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x26 AWG
TEMPERATURE RATING	-40°C TO +90°C (-40°F TO +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

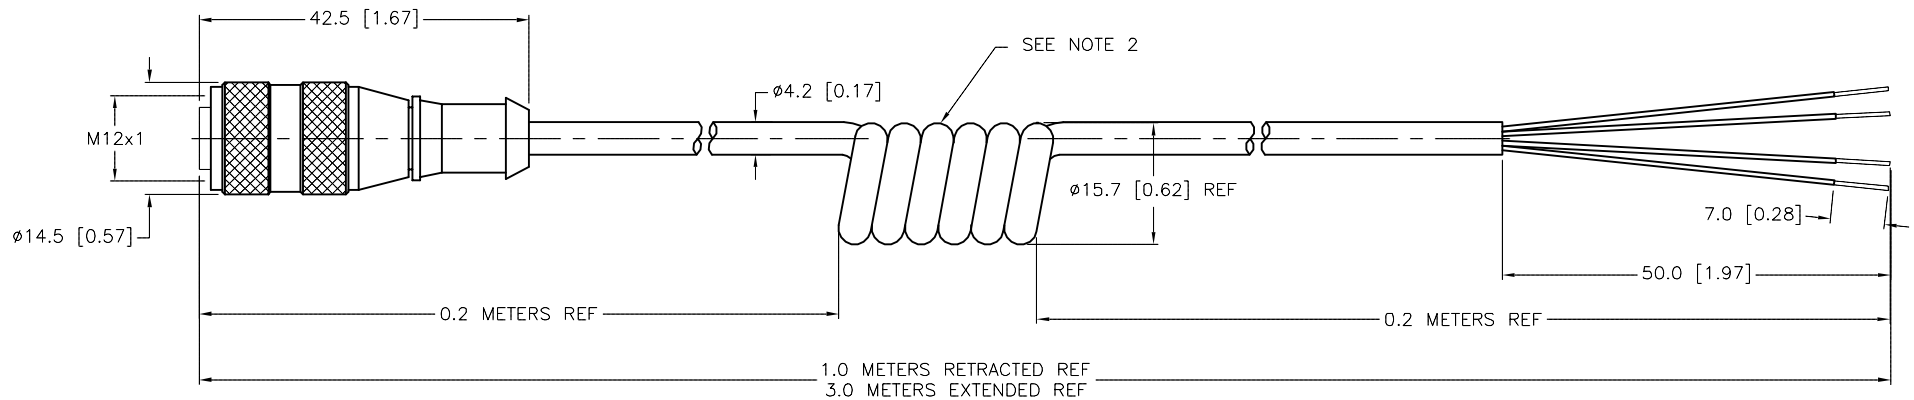

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
2. NUMBER OF COILS IS REFERENCE ONLY.
3. "/S669" DESIGNATES EUROFAST CONNECTOR WITH PICOFAST COIL CORD. STANDARD COLORS, 26 AWG.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com						
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	12/05/13	DESCRIPTION WAKW 4.4T-3/S90-SP/S669		
SEE SPECIFICATIONS		APVD	N.M.	SCALE	1=1.0			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U2-22306		REV B
SEE SPECIFICATIONS								
						FILE: U2-22306		SHEET 1 OF

B	UPDATE RATED CURRENT	NF	05/26/16	55008
REV	DESCRIPTION	BY	DATE	ECO NO.